

Pulse Blowing Valve


AXTS040 □ - □ □ - *X2*




- The peak pressure of repeatedly colliding air permits efficient blowing.
- Air consumption: Reduced by 50% or more








Control for pulse generation is not required. Pulse blow can be used by simply supplying air.

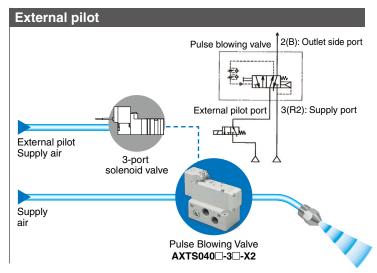



- Long service life (200 million cycles or more)
- Flow rate characteristics

Type of actuation	C [dm ³ /(s·bar)]	b	Cv
External pilot	14	0.18	3.4
Internal pilot	12	0.14	2.9

- ON/OFF time adjustable individually
- Operating pressure range: 0.2 to 1.0 MPa

To ensure the safest possible operation of this product, please be sure to thoroughly read the "Safety Instructions" in our "Best Pneumatics" catalog before use.

