


# 5 Port Solenoid Valve Series *VQC*

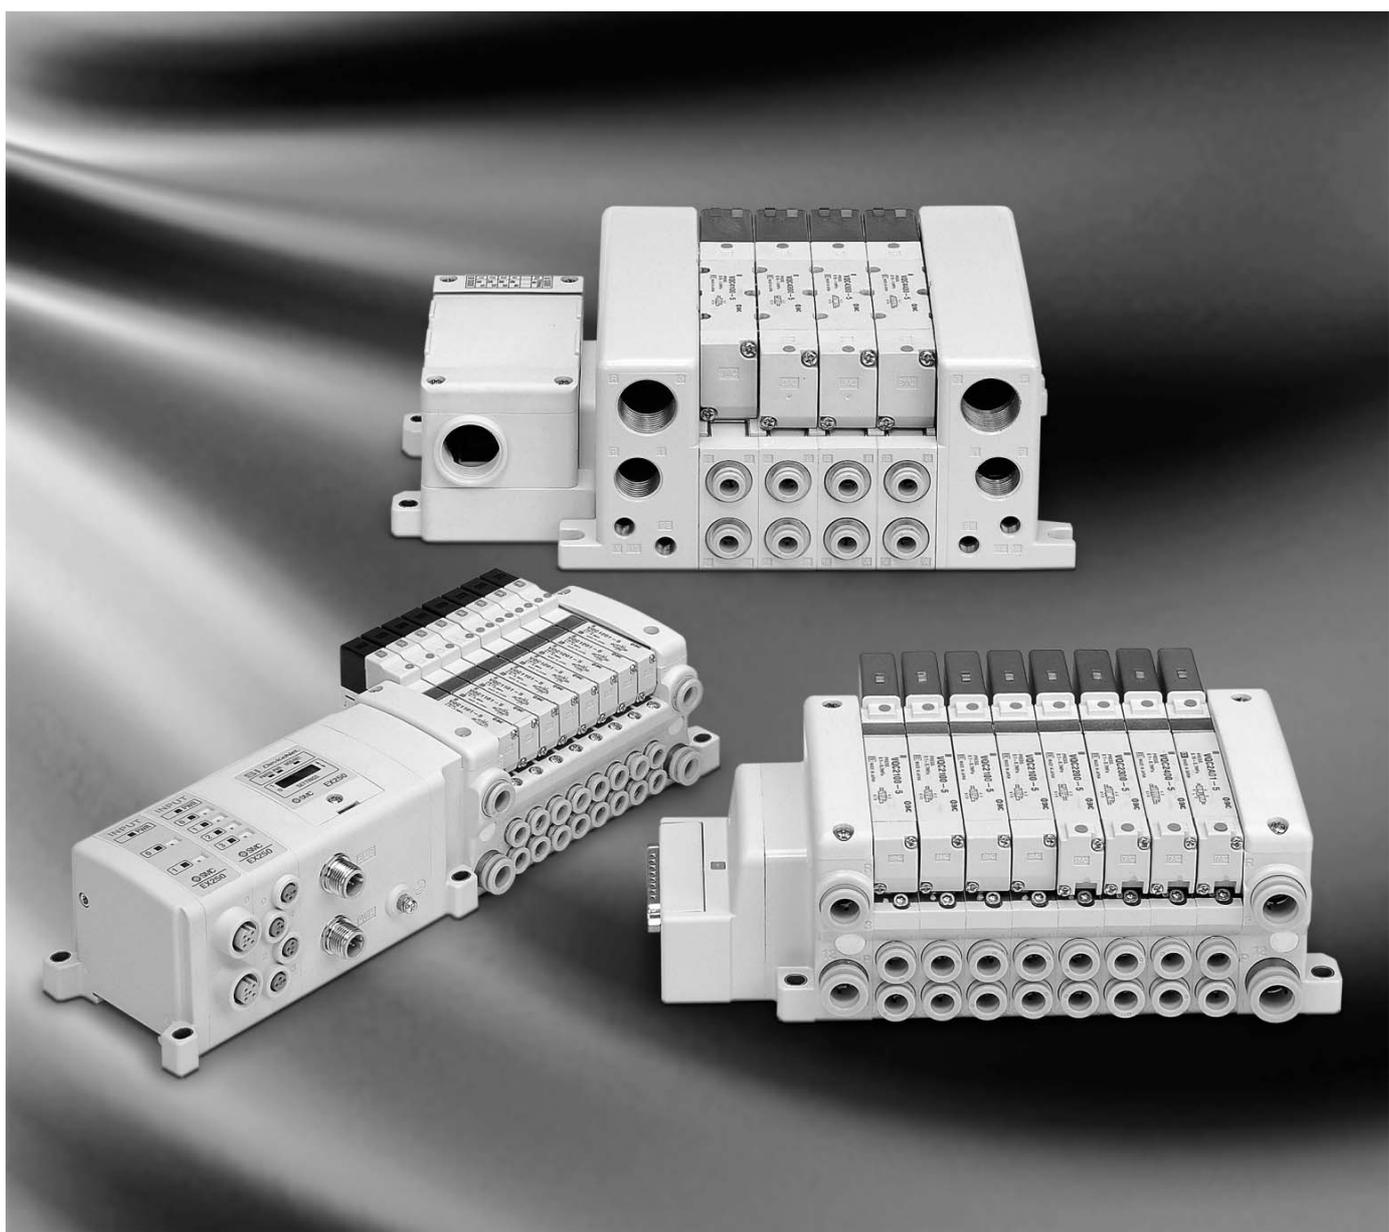

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

# ⚠ Precautions 1

Be sure to read before handling. For Safety Instructions and Solenoid Valve Precautions, refer to page 2-9-2.

## Manual Override


### ⚠ Warning

Since connected equipment will operate when the manual override is activated, confirm that conditions are safe prior to activation.


The non-locking push type (tool required) is standard, and the slotted locking type (tool required) is optional.

#### ■ VQC1000/2000


##### Non-locking push type (Tool required)

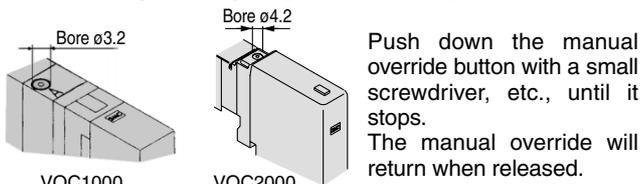



##### Slotted locking type (Tool required) <Option>

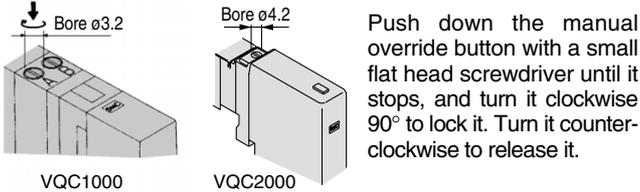


##### Locking type (Manual) <Option>

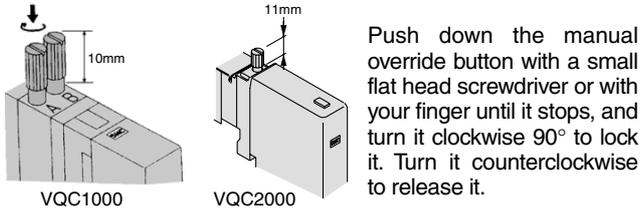

##### Slide locking type (Manual) <Option>

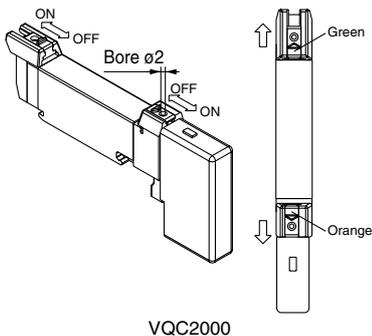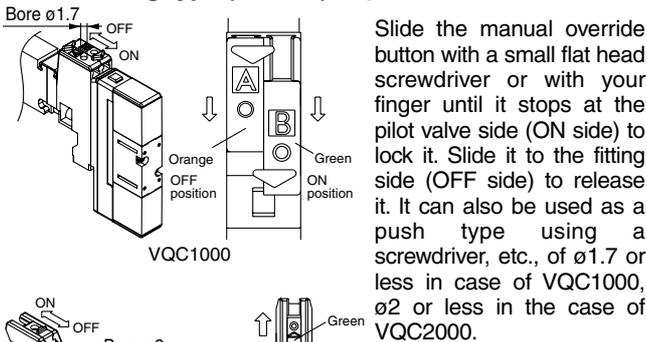


##### Non-locking push type (Tool required)




Push down the manual override button with a small screwdriver until it stops. The manual override will return when released.

##### Locking type (Manual) <Optional>




Push down the manual override button with a small flat head screwdriver until it stops, and turn it clockwise 90° to lock it. Turn it counterclockwise to release it.



## Solenoid Valve Removal and Mounting (VQC1000/2000)

### ⚠ Caution



#### Removal steps

1. Loosen the clamp screws until they turn freely. (The screws do not come out.)
2. Remove the solenoid valve from clamp B by lifting the coil side of the valve while pushing on the screw top. If pushing down on the screw is difficult, you can alternately press down on the valve gently in the area near the manual override.

#### Mounting steps

1. Push the clamp screws. Clamp A opens. Now insert the end plate hook of the valve into clamp B from an angle.
2. Push the valve down into place. (When you release the screws, the valve will be locked into clamp A.)
3. Tighten the clamp screws with a tightening torque of 0.25 to 0.35 N·m for VQC1000 and 0.5 to 0.7 N·m for VQC2000.

### ⚠ Caution


Do not let foreign matter stick on the seal side of the gasket and solenoid, as this will cause air leakage.

## Valve Mounting (VQC4000)

### ⚠ Caution

After confirming that the gasket is installed correctly, securely tighten the mounting screws according to the tightening torque shown below.

Proper tightening torque (N·m)
0.8 to 1.2

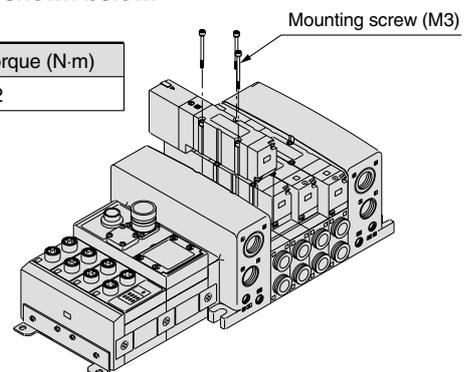

## ⚠ Precautions 2

Be sure to read before handling. For Safety Instructions and Solenoid Valve Precautions, refer to page 2-9-2.

### Replacing One-touch Fittings


#### ⚠ Caution

Cylinder port fittings are available in cassette type and can be replaced easily.

Fittings are secured with a retaining clip that is inserted from the top side of the valve. After removing the valve, remove the clip with a flat head screw driver to replace the fittings.


To mount a fitting, insert the fitting assembly until it stops and reinsert the retaining clip to its designated position.

#### ■ VQC1000/2000

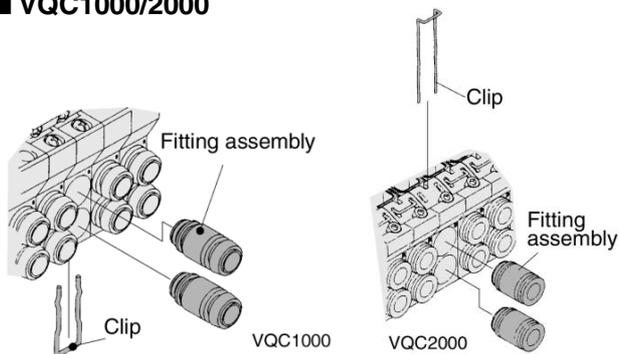

Applicable tube O.D.	Fitting assembly part no.	
	VQC1000	VQC2000
ø3.2	VVQ1000-50A-C3	—
ø4	VVQ1000-50A-C4	VVQ1000-51A-C4
ø6	VVQ1000-50A-C6	VVQ1000-51A-C6
ø8	—	VVQ1000-51A-C8
M5	VVQ1000-50A-M5	—
ø1/8"	VVQ1000-50A-N1	—
ø5/32"	VVQ1000-50A-N3	VVQ1000-51A-N3
ø1/4"	VVQ1000-50A-N7	VVQ1000-51A-N7
ø5/16"	—	VVQ1000-51A-N9

#### ■ VQC4000

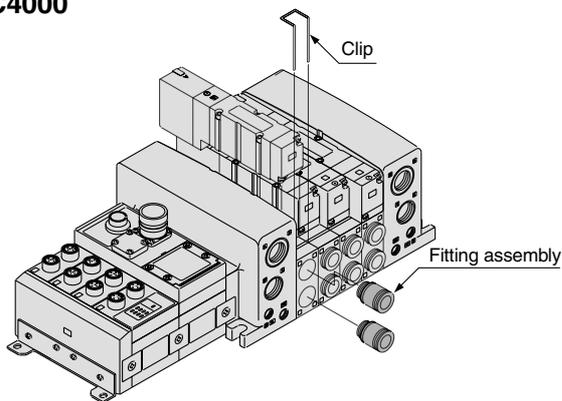


Applicable tube O.D.	Fitting assembly part no.
	VQC4000
ø8	VVQ4000-50B-C8
ø10	VVQ4000-50B-C10
ø12	VVQ4000-50B-C12
ø1/4"	VVQ4000-50B-N7
ø5/16"	VVQ4000-50B-N9
ø3/8"	VVQ4000-50B-N11

### Light/Surge Voltage Suppressor (VQC1000/2000)

#### ⚠ Caution

Indicator lights are all positioned on one side for both single solenoid and double solenoid type valves.


For double solenoid type, 2 colours that are same as the manual override are used to indicate the energization of A-side or B-side.

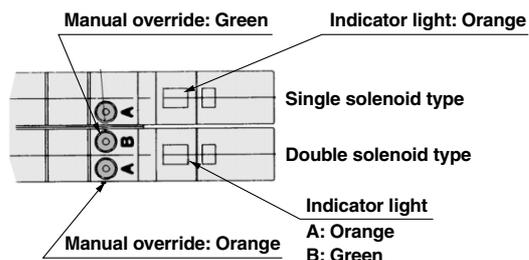

(For VQC1000)


#### DC circuit

##### Single solenoid type



Note) A-side energized: Light (orange) ON  
B-side energized: Light (green) ON


##### Double solenoid type




With miswiring prevention mechanism (stop diode)  
With surge absorbing mechanism (surge absorbing diode) mechanism

### Internal Wiring Specifications (VQC4000)

#### ⚠ Caution

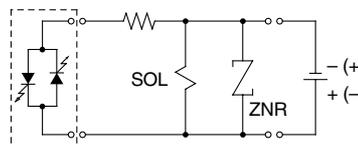

Light circuit assembly (orange) **DC: Single**

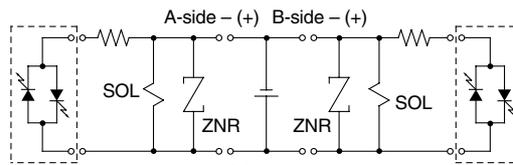

A-side light circuit assembly (orange) **DC: Double** B-side light circuit assembly (green)

#### How to Calculate the Flow Rate

Refer to pages 2-1-8 to 2-1-11.

VQC

SQ

VQ0

VQ4

VQ5

VQZ

VQD

## Precautions 3

Be sure to read before handling. For Safety Instructions and Solenoid Valve Precautions, refer to page 2-9-2.

### Serial Wiring EX500/EX250/EX240/EX126 Precautions

#### Warning

1. These products are intended for use in general factory automation equipment.  
Avoid using these products in machinery/equipment which affects human safety, and in cases where malfunction or failure can result in extensive damage.
2. Do not use in explosive environments, in the presence of inflammable gases, or in corrosive environments. This can cause injury or fire.
3. Work such as transporting, installing, piping, wiring, operation, control and maintenance should be performed by knowledgeable and qualified personnel only. As handling involves the risk of a danger of electrocution, injury or fire.
4. Install an external emergency stop circuit that can promptly stop operation and shut off the power supply.
5. Do not modify these products. Modifications done to these products carry the risk of injury and damage.

#### Caution

1. Read the instruction manual carefully, strictly observe the precautions and operate within the range of the specifications.
2. Do not drop these products or submit them to strong impacts. This can cause damage, failure or malfunction.
3. In locations with poor electrical conditions, take steps to ensure a steady flow of the rated power supply. Use of a voltage outside of the specifications can cause malfunction, damage to the unit, electrocution or fire.
4. Do not touch connector terminals or internal circuit elements when current is being supplied. There is a danger of malfunction, damage to the unit or electrocution if connector terminals or internal circuit elements are touched when current is being supplied.  
Be sure that the power supply is OFF when adding or removing manifold valves or input blocks or when connecting or disconnecting connectors.
5. Operate at an ambient temperature that is within the specifications. Even when the ambient temperature range is within the specifications, do not use in locations where there are rapid temperature changes.

#### Caution

6. Keep wire scraps and other extraneous materials from getting inside these products. This can cause fire, failure or malfunction.
7. Give consideration to the operating environment depending on the type of enclosure being used.  
To achieve IP65 and IP67 protection, provide appropriate wiring between all units using electrical wiring cables, communication connectors and cables with M12 connectors. Also, provide waterproof caps when there are unused ports, and perform proper mounting of input units, input blocks, SI units and manifold valves. Provide a cover or other protection for applications in which there is constant exposure to water.
8. Use the proper tightening torques.  
There is a possibility of damaging threads if tightening exceeds the tightening torque range.
9. Adjustment and operation.  
Use a sharp-ended watchmakers screw driver to set the dip switches and rotary switches.
10. Provide adequate protection when operating in locations such as the following:
  - Where noise is generated by static electricity
  - Where there is a strong electric field
  - Where there is a danger of exposure to radiation
  - When in close proximity to power supply lines
11. When these products are installed in equipment, provide adequate protection against noise by using noise filters.
12. Since these products are components whose end usage is obtained after installation in other equipment, the customer should confirm conformity to EMC directives for the finished product.
13. Do not remove the name plate.
14. Perform periodic inspections and confirm normal operation, otherwise it may be impossible to guarantee safety due to unexpected malfunction or erroneous operation.

## ⚠ Precautions 4

Be sure to read before handling. For Safety Instructions and Solenoid Valve Precautions, refer to page 2-9-2.

### When one AS-i power supply system is used

## ⚠ Caution

		TCW	SDTC	TDW	SDTD
Power supply voltage		Supplied from AS-i circuit, 26.5 to 31.6 VDC <sup>Note 1)</sup>			
Current consumption <sup>Note 2)</sup>		Max. 100 mA		Max. 65 mA	
Input/output specifications	Number of inputs	8		4	
	Number of outputs	8		4	
	Valve supply voltage	24 VDC ± 10%			
	Possible supply current <sup>Note 3)</sup>	Max. 240 mA		Max. 120 mA	

Note 1) For communication power supply, use a power supply dedicated to AS-i. For details, please refer to instruction manuals provided by the respective manufacturers.

Note 2) Current consumption of SI unit internal power supply

Note 3) The AS-i circuit provides current to the internal parts of the SI unit and all connected equipment. Since there is a limit on the possible supply current to all connected equipment, select the equipment connected to the input block, such as sensors and valves, to stay within the possible supply current.

Example) When SDTD type is used

Valve: VQC1100NY - 5 (low wattage type of 0.5 W) × 4 pcs.

$$0.5 \text{ [W]} \div 24 \text{ [V]} \times 4 \text{ [pcs.]} = 84 \text{ [mA]} \text{ (4 outputs simultaneously ON)}$$

The maximum possible supply current of SDTD is 120 mA. Therefore, the possible supply current to the sensor connected to the input block is

$$120 \text{ [mA]} - 84 \text{ [mA]} = 36 \text{ [mA]}.$$

Use of low wattage type valves by minimizing the maximum number of simultaneous outputs, and low current consumption sensors (2-wire sensor, etc.) connected to the input block is recommended.

### Power Supply Safety Instructions

## ⚠ Caution

1. Operation is possible with a single power supply or a separate power supply. However, be sure to provide two wiring systems (one for solenoid valves, and one for input and control units).
2. Use the following UL approved products for DC power supply combinations.

- (1) Controlled voltage current circuit conforming to UL508  
Circuit uses the secondary coil of an isolated transformer as the power supply, satisfying the following conditions.
- Max. voltage (with no load): 30 Vrms (42.4 V peak) or less
  - Max. current: ① 8 A or less (including shorts), and  
② When controlled by a circuit protector (fuse) with the following ratings:

No-load voltage (V peak)	Max. current rating
0 to 20 [V]	5.0
Over 20 [V] and up to 30 [V]	100
	Peak voltage value

- (2) A circuit (class 2 circuit) with maximum 30 Vrms (42.4 V peak) or less, and a power supply consisting of a class 2 power supply unit conforming to UL1310, or a class 2 transformer conforming to UL1585.

### Cable Safety Instructions

## ⚠ Caution

1. Avoid miswiring, as this can cause malfunction, damage and fire in the unit.
2. Do not conduct wiring work while the cables are energized.  
The SI unit may be damaged or malfunction.
3. To prevent noise and surge in signal lines, keep all wiring separate from power lines and high voltage lines. Otherwise, this can cause a malfunction.
4. Check wiring insulation, as defective insulation can cause damage to the unit when excessive voltage or current is applied.
5. Do not bend or pull cables repeatedly, and do not place heavy objects on them or allow them to be pinched. This can cause broken lines.

VQC

SQ

VQ0

VQ4

VQ5

VQZ

VQD

# Connector Type Manifold

## Series VQC1000/2000/4000

### Outstanding response times and long service life

(Metal seal: Single type with light/surge voltage suppressor)

VQC1100: 10 ms ±2 ms; 200 million cycles


VQC2100: 20 ms ±2 ms; 200 million cycles

VQC4100: 17 ms ±3 ms; 100 million cycles

### Compact and large flow

Type (Series)	Manifold pitch (mm)	Flow characteristics <small>Note)</small>						Applicable cylinder size (mm)
		Metal seal			Rubber seal			
		C[dm <sup>3</sup> /(s·bar)]	b	Cv	C[dm <sup>3</sup> /(s·bar)]	b	Cv	
VQC1000	10.5	0.72	0.25	0.18	1.0	0.30	0.25	to ø50
VQC2000	16	2.6	0.15	0.60	3.2	0.30	0.80	to ø80
VQC4000	25	6.9	0.17	1.7	7.3	0.38	2.0	to ø140



Note) Values for 2 position single from 4 to 5 and from 2 to 3. (From A to R1 and from B to R2).

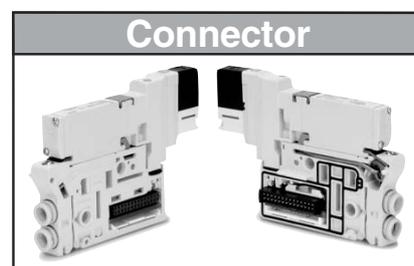

Connector

### Connector entry direction can be changed with a single push (F, P kit)


The connector entry direction can be changed from the top to the side by simply pressing the manual release button. It is not necessary to use the manual release button when switching from the side to the top.

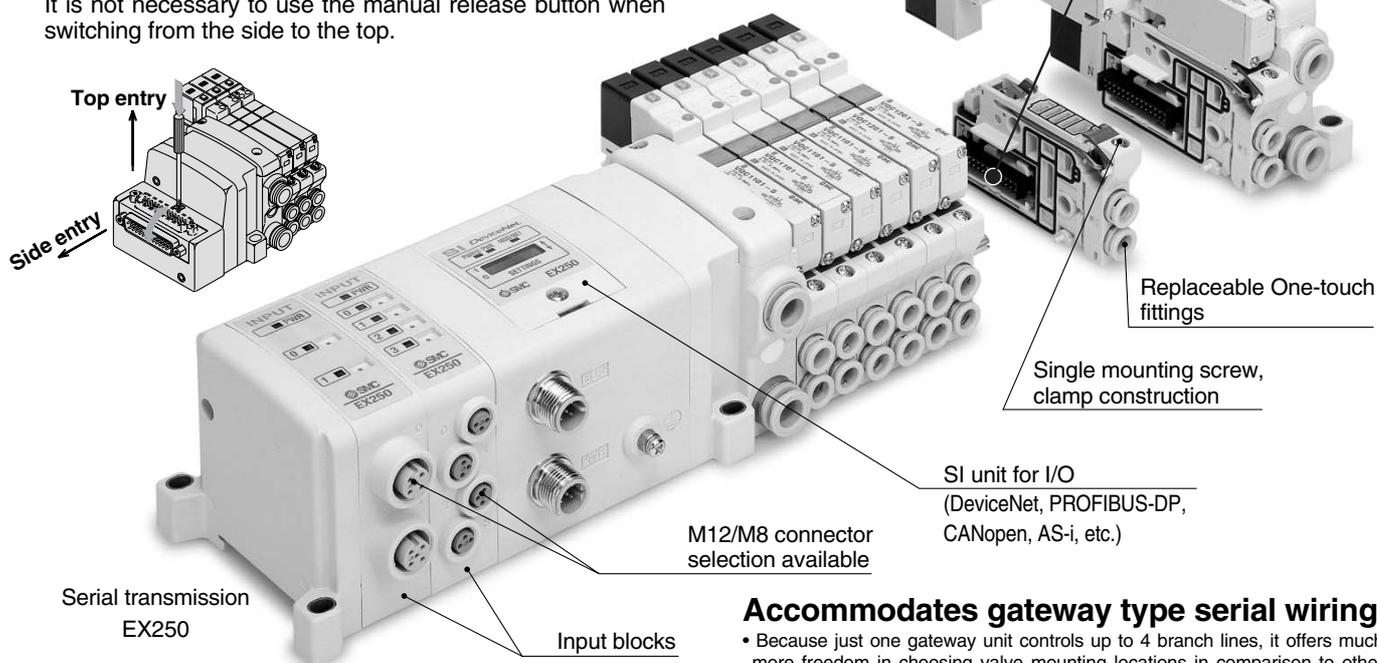

### Accommodates gateway type serial wiring


- Because just one gateway unit controls up to 4 branch lines, it offers much more freedom in choosing valve mounting locations in comparison to other serial units.
- A single cable from the gateway provides both signal and power to each branch, thus eliminating the need for separate power connections for each manifold valve and input block.
- The use of a multi-connector for input blocks makes manifold station expansion or reduction a breeze.

# A wide variety of prepackaged wiring configurations

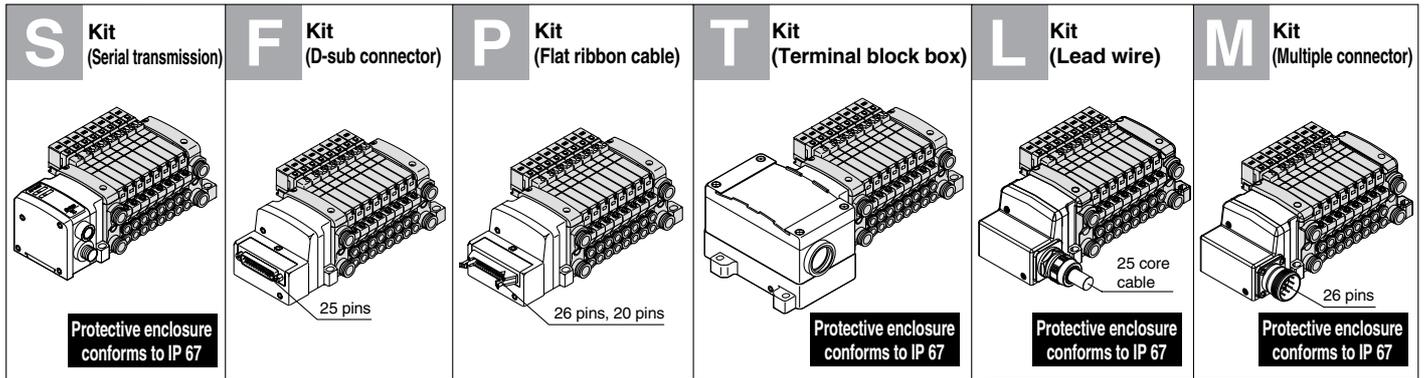

- Our six standard wiring packages bring a world of ease to wiring and maintenance work, while the protective enclosures of four of them conform to IP67 standards.
- The S Kit is compatible with a combined I/O unit. (If used with Gateway unit, SI must be output only.)

**Conforming to IP67 for protection from dust and moisture**  
 (Based on IEC529)  
 (For kits S, T, L and M)

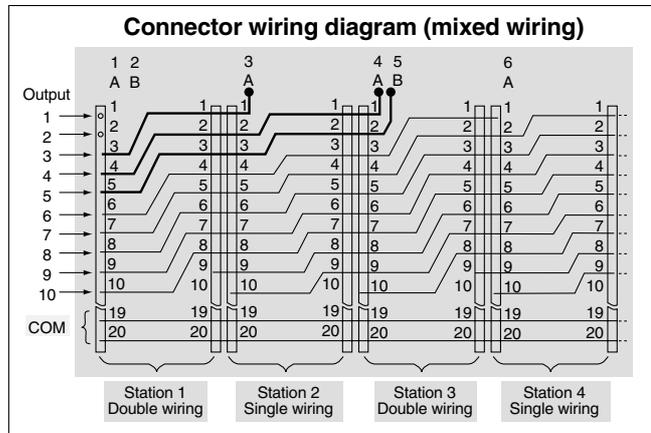

(Refer to the connector wiring diagram.)  
 Printed circuit board patterns between connectors are shifted at every station. This allows for viable connections to take place without necessarily specifying whether the manifold station is double, single, or mixed wiring.


- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

## Dual 3 port valves, 4 positions

VQC1000/2000 (Rubber seal type only)





- Two 3 port valves built into one body.
- The 3 port valves on the A and B sides can operate independently.
- When used as 3 port valves, only half the number of stations is required.
- Can also be used as a 4 position, 5 port valve.






Exhaust center : **VQC1A01**  
**VQC2A01**  
 Pressure center: **VQC1B01**  
**VQC2B01**

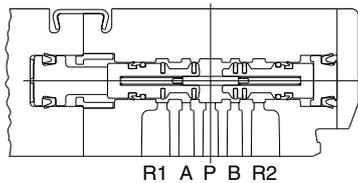

Model	A side	B side	JIS Symbol
<b>VQC1A01</b> <b>VQC2A01</b>	<b>N.C. valve</b>	<b>N.C. valve</b>	
<b>VQC1B01</b> <b>VQC2B01</b>	<b>N.O. valve</b>	<b>N.O. valve</b>	
<b>VQC1C01</b> <b>VQC2C01</b>	<b>N.C. valve</b>	<b>N.O. valve</b>	

# Base Mounted: Variations


		Sonic Conductance C[dm <sup>3</sup> /(s·bar)] (Values of CYL to EXH (From 4 to 5 and from 2 to 3))		Applicable bore size	S Kit				
					Serial transmission				
		Single/Double	3 position (Closed center)		Gateway application Compatible network • Remote I/O • DeviceNet • PROFIBUS-DP • CC-LINK Decentralized Serial Wiring <small>Gateway application requires a gateway unit and communication cable separately. Please contact SMC for more details.</small>  Serial unit: EX500 <b>IP67 compliant</b>	Compatible network • DeviceNet • PROFIBUS-DP • CC-LINK • AS-i • CANopen <b>I/O</b>  Serial unit: EX250 <b>IP67 compliant</b>	Compatible network • DeviceNet • PROFIBUS-DP <b>I/O</b>  Serial unit: EX240 <b>IP67 compliant</b>	Compatible network • CC-LINK <b>Output</b>  Serial unit: EX126 <b>IP67 compliant</b>	
					Series VQC1000	Metal seal	VQC1□00	0.72	0.72
Rubber seal	VQC1□01	1.0	0.65						
Series VQC2000	Metal seal	VQC2□00	2.6	2.0	to ø80			—	
	Rubber seal	VQC2□01	3.2	2.2					
Series VQC4000	Metal seal	VQC4□00	6.9	6.3	to ø140				
	Rubber seal	VQC4□01	7.3	6.4					

F Kit	P Kit	T Kit	L Kit	M Kit	Port size			
<b>D-sub connector</b> <b>D-sub connector</b> (Compatible with D-sub connector that complies with MIL standard.)  25 pins	<b>Flat ribbon cable</b> <b>Flat ribbon cable</b> (Compatible with flat ribbon cable connector that complies with MIL standard.)  26 pins 20 pins	<b>Terminal block box</b> <b>Terminal block box (Terminal blocks)</b> Terminals are concentrated in compact clusters within the terminal block box.  <b>IP67 compliant</b>	<b>Electrical entry</b> <b>Lead wire</b> (IP67 enclosure with use of multiple wire cable with sheath and waterproof connector)  25 core cable <b>IP67 compliant</b>	<b>Multiple connector</b> <b>Multiple connector</b> (IP67 enclosure with use of waterproof multiple connector)  26 pins <b>IP67 compliant</b>	<b>SUP EXH port</b> <b>1, 3 (P, R)</b>	<b>Cylinder port</b> <b>2, 4 (A, B)</b>		
							C3 (For ø3.2) C4 (For ø4) C6 (For ø6) C8 (for ø8) N9 (ø5/16")	N1 (ø1/8") N3 (ø5/32") N7 (ø1/4")
					C10 (for ø10) N11 (ø3/8") In case of branch type C12 (for ø12) N13 (ø1/2")	C4 (For ø4) C6 (For ø6) C8 (For ø8) N3 (ø5/32") N7 (ø1/4") N9 (ø5/16")		
					<SUP port> Rc 1/2 (NPT, NPTF, G)	C8 (For ø8) C10 (For ø10) C12 (For ø12) N7 (ø1/4") N9 (ø5/16") N11 (ø3/8")	<EXH port> Rc 3/4 (NPT, NPTF, G)	Rc 1/4 Rc 3/8 Rc 1/4 (Bottom ported) (NPT, NPTF, G)

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

# Cylinder Average Speed

This chart is provided as guidelines only.  
For performance under various conditions, use SMC's Model Selection Program before making a judgment.

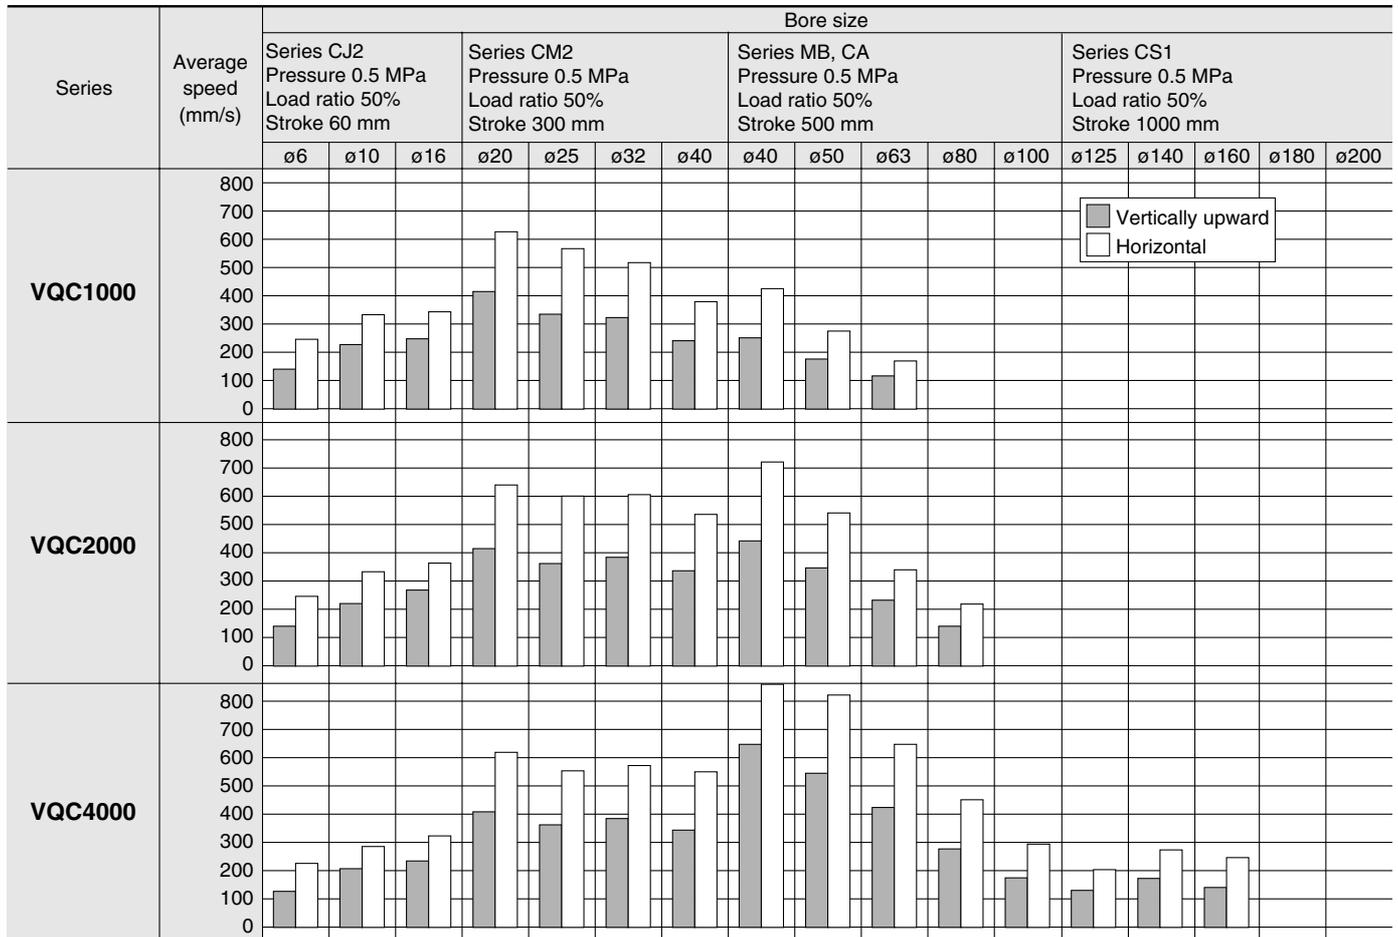

- \* Values at extension of a directly coupled cylinder when meter-out speed controllers are used with the needle full open.
- \* The average speed of the cylinder is obtained by dividing the stroke by the total stroke time.
- \* The load ratio is obtained by the following formula:  $((\text{Load weight} \times 9.8) / \text{Theoretical output}) \times 100\%$

## Conditions

Base piping		Series CJ2	Series CM2	Series MB, CA	Series CS1
VQC1000	Tube x Length	T0604 x 1 m			—
	Speed controller	AS3001F-06			—
	Silencer	AN200-KM8			—
VQC2000	Tube x Length	T0604 x 1 m	T0806 x 1 m		—
	Speed controller	AS3001F-06	AS3001F-08		—
	Silencer	AN200-KM10			—
VQC4000	Tube x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m	
	Speed controller	AS3001F-06	AS4001F-10	AS4001F-12	
	Silencer	AN400-04		AN400-04	


## Conditions (With SGP (Stainless steel gas piping))

Direct piping		Series MB, CA	Series CS1
VQC4000	Tube x Length	SGP10A x 1 m	
	Speed controller	AS420-03	
	Silencer	AN400-04	

# Series VQC1000

## Base Mounted Plug-in Unit

### How to Order Manifold

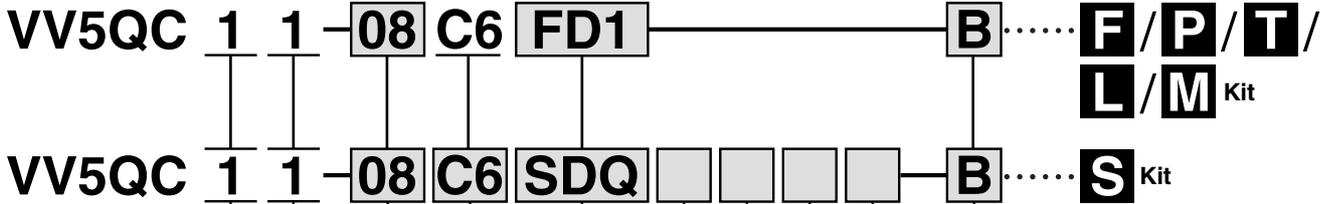

**Series**

1	VQC1000
---	---------

**Manifold model**

1	Plug-in unit
---	--------------

**Stations**

01	1 station
⋮	⋮

The maximum number of stations differs depending on the electrical entry.

**Cylinder port size**

C3	With ø3.2 One-touch fitting
C4	With ø4 One-touch fitting
C6	With ø6 One-touch fitting
M5	M5 thread
CM	Mixed sizes and with port plug
L3	Top ported elbow With ø3.2 One-touch fitting
L4	Top ported elbow With ø4 One-touch fitting
L6	Top ported elbow With ø6 One-touch fitting
L5	M5 thread
B3	Bottom ported elbow With ø3.2 One-touch fitting
B4	Bottom ported elbow With ø4 One-touch fitting
B6	Bottom ported elbow With ø6 One-touch fitting
B5	M5 thread
LM	Elbow port, mixed sizes

Note 1) Indicate the size in the specification sheet in the case of "CM" and "LM".

Note 2) Symbols for inch sizes areas follows:  
**<For One-touch fittings>**  
 N1: ø1/8"  
 N3: ø5/32"  
 N7: ø1/4"  
 NM: Mixed

The top ported elbow is LN□ and the bottom ported elbow is BN□.

**Kit designation/Electrical entry/Cable length**  
 (Refer to page 2-2-12 for detailed information on kits.)

**Option**

Nil	None
B	All stations with back pressure check valve <sup>Note 1)</sup>
D	With DIN rail (Rail length: Standard)
D□	With DIN rail (Rail length: Special) <sup>Note 2)</sup>
K	Special wiring specifications <sup>Note 3)</sup> (Except double wiring)
N	With name plate
R	External pilot <sup>Note 4)</sup>
S	Direct exhaust with built-in silencer <sup>Note 5)</sup>

\* When specifying more than one option, enter symbols in alphabetical order.  
 Example: -BRS

Note 1) When using the back pressure check valve for the necessary stations only, enter the back pressure check valve part no. and indicate the number of manifold stations on the specification sheet.

Note 2) For special DIN rail length, indicate "D□". (Enter the number of stations inside □.)

Example: -D08  
 In this case, stations will be mounted on a DIN rail for 8 stations regardless of the actual number of manifold stations.

The specified number of stations must be larger than the number of stations on the manifold.

Indicate "-D0" for the option without DIN rail.

Note 3) Be sure to indicate the wiring specifications on the specification sheet.

Note 4) For external pilot option, "-R", indicate the external pilot specification "R" for the applicable valves as well.

Note 5) The built-in silencer type does not satisfy the IP67 standard.

**Input block COM.**  
 (Fill out for I/O unit only)

Nil	PNP (+) or without SI unit/input block
N	NPN (-)

**Input block type**  
 (Fill out for I/O unit only)

Nil	Without input block
1	M12, 2 inputs
2	M12, 4 inputs
3	M8, 4 inputs (3 pins)

**Number of input blocks**  
 (Fill out for I/O unit only)

Nil	Without SI unit/input block
0	Without input block
1	With 1 input block
⋮	⋮
8	With 8 input blocks

**SI unit COM**

SI unit COM	EX250					EX500				EX126
	DeviceNet	PROFIBUS-DP	CC-LINK	AS-i	CANopen	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O	CC-LINK
Nil +COM	—	—	○	—	—	○	○	○	○	○
N -COM	○	○	—	○	○	○	○	○	○	—

Note) Leave the box blank for the SI unit COM without SI unit (SD0).

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

## How to Order Valves

**VQC 1 1 0 0** [ ] [ ] [ ] - **5** [ ] [ ] [ ]

**Series**  
1 VQC1000

**Type of actuation**

<b>1</b>	2 position single (A)(B) 4 2 5 1 3 (R1)(P)(R2)	<b>A</b> Note)	4 position dual 3 port valve (A) (A) (B) 4 2 5 1 3 (R1) 1 (R2) N.C (P) N.C
<b>2</b>	2 position double (metal) (A)(B) 4 2 5 1 3 (R1)(P)(R2)	<b>B</b> Note)	4 position dual 3 port valve (B) (A) (B) 4 2 5 1 3 (R1) 1 (R2) N.O (P) N.O
	2 position double (rubber) (A)(B) 4 2 5 1 3 (R1)(P)(R2)		<b>C</b> Note)
<b>3</b>	3 position closed center (A)(B) 4 2 5 1 3 (R1)(P)(R2)	Note) For rubber seal type only.	4 position dual 3 port valve (C) (A) (B) 4 2 5 1 3 (R1) 1 (R2) N.C (P) N.O
	3 position exhaust center (A)(B) 4 2 5 1 3 (R1)(P)(R2)		
	3 position pressure center (A)(B) 4 2 5 1 3 (R1)(P)(R2)		

**Seal type**

0	Metal seal
1	Rubber seal

**Light/Surge voltage suppressor**

Nil	With
E	Without Note)

Note) Not applicable to S kit.

**Coil voltage**

5	24 VDC Note)
6	12 VDC

Note) S kit is only available for 24 VDC.

**Function**

Nil	Standard type (1 W)
K <sup>Note 1)</sup>	High pressure type (1.0 MPa)
N	Negative COM
R <sup>Note 2)</sup>	External pilot
Y	Low wattage type (0.5 W)

\* When specifying more than one option, enter symbols in alphabetical order.  
Note 1) For metal seal type only.  
Note 2) Not applicable for dual 3 port valve.

**Manual override**









**Nil:** Non-locking push type (Slotted)

**B:** Locking type (Slotted)

**C:** Locking type (Manual)


**D:** Slide locking type (Manual)

### Kit Designation/Electrical Entry/Cable Length


<p><b>S</b> Kit (Decentralized wiring type serial kit)</p>  <p>Serial unit: <b>EX500</b> IP67 compliant</p> <p>Note) A separate gateway unit and communication cable are required.</p> <table border="1"> <tr> <td><b>SD0</b> Serial kit without SI unit</td> <td>1 to 8 stations (16 stations)</td> </tr> <tr> <td><b>SDA1</b> Serial kit for Remote I/O</td> <td>1 to 8 stations (16 stations)</td> </tr> <tr> <td><b>SDA2</b> Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK</td> <td>1 to 8 stations (16 stations)</td> </tr> </table>	<b>SD0</b> Serial kit without SI unit	1 to 8 stations (16 stations)	<b>SDA1</b> Serial kit for Remote I/O	1 to 8 stations (16 stations)	<b>SDA2</b> Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	1 to 8 stations (16 stations)	<p><b>S</b> Kit (I/O serial kit)</p>  <p>Serial unit: <b>EX250</b> IP67 compliant</p> <table border="1"> <tr> <td><b>SD0</b> Serial kit without SI unit</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>SDY</b> Serial kit for CANopen</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>SDQ</b> Serial kit for DeviceNet</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>SDN</b> Serial kit for PROFIBUS-DP</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>SDV</b> Serial kit for CC-LINK</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>SDTA</b> AS-; 8 in/out, 31 slave modes, 2 power supply systems</td> <td>1 to 4 stations (8 stations)</td> </tr> <tr> <td><b>SDTB</b> AS-; 4 in/out, 31 slave modes, 2 power supply systems</td> <td>1 to 2 stations (4 stations)</td> </tr> <tr> <td><b>SDTC</b> AS-; 8 in/out, 31 slave modes, 1 power supply systems</td> <td>1 to 4 stations (8 stations)</td> </tr> <tr> <td><b>SDTD</b> AS-; 4 in/out, 31 slave modes, 1 power supply systems</td> <td>1 to 2 stations (4 stations)</td> </tr> </table>	<b>SD0</b> Serial kit without SI unit	1 to 12 stations (24 stations)	<b>SDY</b> Serial kit for CANopen	1 to 12 stations (24 stations)	<b>SDQ</b> Serial kit for DeviceNet	1 to 12 stations (24 stations)	<b>SDN</b> Serial kit for PROFIBUS-DP	1 to 12 stations (24 stations)	<b>SDV</b> Serial kit for CC-LINK	1 to 12 stations (24 stations)	<b>SDTA</b> AS-; 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)	<b>SDTB</b> AS-; 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)	<b>SDTC</b> AS-; 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)	<b>SDTD</b> AS-; 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)	<p><b>S</b> Kit (Serial output kit)</p>  <p>Serial unit: <b>EX126</b> IP67 compliant</p> <table border="1"> <tr> <td><b>SDVB</b> Serial kit for CC-LINK</td> <td>1 to 8 stations (16 stations)</td> </tr> </table>	<b>SDVB</b> Serial kit for CC-LINK	1 to 8 stations (16 stations)	<p><b>F</b> Kit (D-sub connector kit)</p>  <p>25 pins</p> <p>IP40 compliant</p> <table border="1"> <tr> <td><b>FD0</b> D-sub connector kit (25P) without cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>FD1</b> D-sub connector kit (25P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>FD2</b> D-sub connector kit (25P) with 3.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>FD3</b> D-sub connector kit (25P) with 5.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> </table>	<b>FD0</b> D-sub connector kit (25P) without cable	1 to 12 stations (24 stations)	<b>FD1</b> D-sub connector kit (25P) with 1.5 m cable	1 to 12 stations (24 stations)	<b>FD2</b> D-sub connector kit (25P) with 3.0 m cable	1 to 12 stations (24 stations)	<b>FD3</b> D-sub connector kit (25P) with 5.0 m cable	1 to 12 stations (24 stations)
<b>SD0</b> Serial kit without SI unit	1 to 8 stations (16 stations)																																				
<b>SDA1</b> Serial kit for Remote I/O	1 to 8 stations (16 stations)																																				
<b>SDA2</b> Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	1 to 8 stations (16 stations)																																				
<b>SD0</b> Serial kit without SI unit	1 to 12 stations (24 stations)																																				
<b>SDY</b> Serial kit for CANopen	1 to 12 stations (24 stations)																																				
<b>SDQ</b> Serial kit for DeviceNet	1 to 12 stations (24 stations)																																				
<b>SDN</b> Serial kit for PROFIBUS-DP	1 to 12 stations (24 stations)																																				
<b>SDV</b> Serial kit for CC-LINK	1 to 12 stations (24 stations)																																				
<b>SDTA</b> AS-; 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)																																				
<b>SDTB</b> AS-; 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)																																				
<b>SDTC</b> AS-; 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)																																				
<b>SDTD</b> AS-; 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)																																				
<b>SDVB</b> Serial kit for CC-LINK	1 to 8 stations (16 stations)																																				
<b>FD0</b> D-sub connector kit (25P) without cable	1 to 12 stations (24 stations)																																				
<b>FD1</b> D-sub connector kit (25P) with 1.5 m cable	1 to 12 stations (24 stations)																																				
<b>FD2</b> D-sub connector kit (25P) with 3.0 m cable	1 to 12 stations (24 stations)																																				
<b>FD3</b> D-sub connector kit (25P) with 5.0 m cable	1 to 12 stations (24 stations)																																				
<p><b>P</b> Kit (Flat ribbon cable kit)</p>  <p>26 pins 20 pins</p> <p>IP40 compliant</p> <p>Note) For a 20P flat ribbon cable, the cable assembly must be ordered separately.</p> <table border="1"> <tr> <td><b>PD0</b> Flat ribbon cable kit (26P) without cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>PD1</b> Flat ribbon cable kit (26P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>PD2</b> Flat ribbon cable kit (26P) with 3.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>PD3</b> Flat ribbon cable kit (26P) with 5.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>PDC</b> Flat ribbon cable kit (20P) without cable</td> <td>1 to 9 stations (18 stations)</td> </tr> </table>	<b>PD0</b> Flat ribbon cable kit (26P) without cable	1 to 12 stations (24 stations)	<b>PD1</b> Flat ribbon cable kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)	<b>PD2</b> Flat ribbon cable kit (26P) with 3.0 m cable	1 to 12 stations (24 stations)	<b>PD3</b> Flat ribbon cable kit (26P) with 5.0 m cable	1 to 12 stations (24 stations)	<b>PDC</b> Flat ribbon cable kit (20P) without cable	1 to 9 stations (18 stations)	<p><b>T</b> Kit (Terminal block box kit)</p>  <p>IP67 compliant</p> <table border="1"> <tr> <td><b>TD0</b> Terminal block box kit</td> <td>1 to 10 stations (20 stations)</td> </tr> </table>	<b>TD0</b> Terminal block box kit	1 to 10 stations (20 stations)	<p><b>L</b> Kit (Lead wire kit)</p>  <p>25 core cable</p> <p>IP67 compliant</p> <table border="1"> <tr> <td><b>LD0</b> Lead wire kit (25 core) 0.6 m lead wire</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>LD1</b> Lead wire kit (25 core) 1.5 m lead wire</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>LD2</b> Lead wire kit (25 core) 3.0 m lead wire</td> <td>1 to 12 stations (24 stations)</td> </tr> </table>	<b>LD0</b> Lead wire kit (25 core) 0.6 m lead wire	1 to 12 stations (24 stations)	<b>LD1</b> Lead wire kit (25 core) 1.5 m lead wire	1 to 12 stations (24 stations)	<b>LD2</b> Lead wire kit (25 core) 3.0 m lead wire	1 to 12 stations (24 stations)	<p><b>M</b> Kit (Multiple connector kit)</p>  <p>26 pins</p> <p>IP67 compliant</p> <table border="1"> <tr> <td><b>MD0</b> Multiple connector kit (26P) without cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>MD1</b> Multiple connector kit (26P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>MD2</b> Multiple connector kit (26P) with 3.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td><b>MD3</b> Multiple connector kit (26P) with 5.0 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> </table>	<b>MD0</b> Multiple connector kit (26P) without cable	1 to 12 stations (24 stations)	<b>MD1</b> Multiple connector kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)	<b>MD2</b> Multiple connector kit (26P) with 3.0 m cable	1 to 12 stations (24 stations)	<b>MD3</b> Multiple connector kit (26P) with 5.0 m cable	1 to 12 stations (24 stations)								
<b>PD0</b> Flat ribbon cable kit (26P) without cable	1 to 12 stations (24 stations)																																				
<b>PD1</b> Flat ribbon cable kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)																																				
<b>PD2</b> Flat ribbon cable kit (26P) with 3.0 m cable	1 to 12 stations (24 stations)																																				
<b>PD3</b> Flat ribbon cable kit (26P) with 5.0 m cable	1 to 12 stations (24 stations)																																				
<b>PDC</b> Flat ribbon cable kit (20P) without cable	1 to 9 stations (18 stations)																																				
<b>TD0</b> Terminal block box kit	1 to 10 stations (20 stations)																																				
<b>LD0</b> Lead wire kit (25 core) 0.6 m lead wire	1 to 12 stations (24 stations)																																				
<b>LD1</b> Lead wire kit (25 core) 1.5 m lead wire	1 to 12 stations (24 stations)																																				
<b>LD2</b> Lead wire kit (25 core) 3.0 m lead wire	1 to 12 stations (24 stations)																																				
<b>MD0</b> Multiple connector kit (26P) without cable	1 to 12 stations (24 stations)																																				
<b>MD1</b> Multiple connector kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)																																				
<b>MD2</b> Multiple connector kit (26P) with 3.0 m cable	1 to 12 stations (24 stations)																																				
<b>MD3</b> Multiple connector kit (26P) with 5.0 m cable	1 to 12 stations (24 stations)																																				

**Manifold Option**


**Blanking plate assembly**  
VVQ1000-10A-1




**SUP block plate**  
VVQ1000-16A




**Perfect block**  
VVQ1000-FPG-□□




**Dual flow fitting assembly**  
VVQ1000-52A-C8




**Blanking plate with connector**  
VVQ1000-1C□□-□




**Individual SUP spacer**  
VVQ1000-P-1-C6




**EXH block plate assembly**  
VVQC1000-19A-S-□□□□□□




**Elbow fitting assembly**  
VVQ1000-F-L□




**Port plug**  
VVQ0000-58A




**Electrical wiring specifications [-K]**

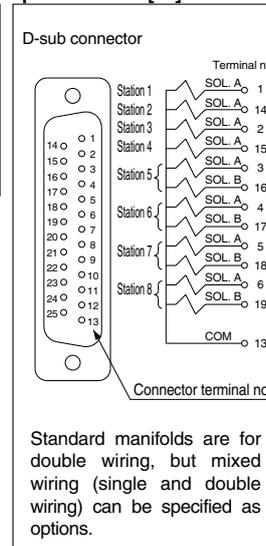


**Individual EXH spacer**  
VVQ1000-R-1-C6




**DIN rail mounting bracket [-D]**  
VVQ1000-57A  
for (F, L, M, P, S (EX500) kit)




**Silencer (For EXH port)**  
AN200-KM8  
AN203-KM8




**Back pressure check valve assembly [-B]**  
VVQ1000-18A




**Name plate [-N]**  
VVQ1000-N-Stations (1 to max. no. of stations)



**Direct EXH outlet with built-in silencer [-S]**



**Blanking plug**  
KQ2P-□



VQC

SQ

VQ0

VQ4

VQ5



VQZ

VQD



# Series VQC2000 Base Mounted Plug-in Unit

## How to Order Manifold

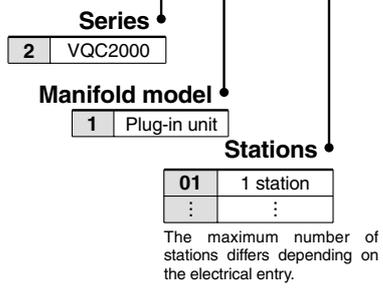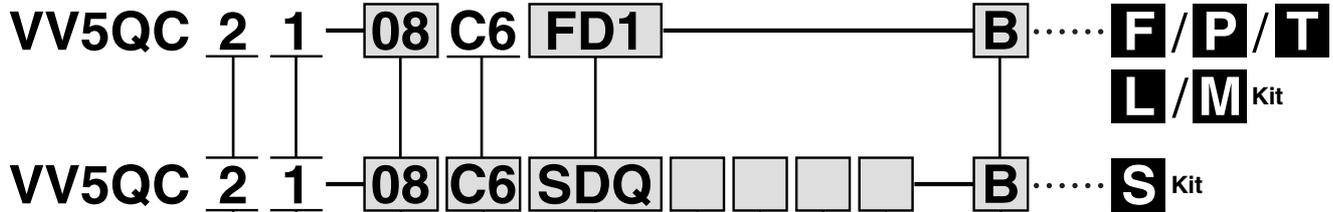

**Cylinder port size**

C4	With ø4 One-touch fitting
C6	With ø6 One-touch fitting
C8	With ø8 One-touch fitting
CM	Mixed sizes and with port plug
L4	Top ported elbow With ø4 One-touch fitting
L6	Top ported elbow With ø6 One-touch fitting
L8	Top ported elbow With ø8 One-touch fitting
B4	Bottom ported elbow With ø4 One-touch fitting
B6	Bottom ported elbow With ø6 One-touch fitting
B8	Bottom ported elbow With ø8 One-touch fitting
LM	Elbow port, mixed sizes

Note 1) Indicate the size in the specification sheet in the case of "CM" and "LM".  
Note 2) Symbols for inch sizes are as follows:  
<For One-touch fittings>  
N3: ø5/32"  
N7: ø1/4"  
N9: ø5/16"  
NM: Mixed  
The top ported elbow is LN□ and the bottom ported elbow is BN□.

**Kit designation/Electrical entry/Cable length**  
(Refer to page 2-2-16 for detailed information on kits.)

**SI unit COM.**

SI unit COM	EX250					EX500				EX126
	DeviceNet	PROFIBUS-DP	CC-LINK	AS-i	CANopen	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O	CC-LINK
Nil	+COM	—	—	○	—	—	○	○	○	○
N	-COM	○	○	—	○	○	○	○	○	—

Note) Leave the box blank for the SI unit COM without SI unit (SD0).

**Number of input blocks (Fill out for I/O unit only)**

Nil	Without SI unit/input block (SD0)
0	Without input block
1	With 1 input block
:	:
8	With 8 input blocks

**Option**

Nil	None
B	All stations with back pressure check valve Note 1)
D	With DIN rail (Rail length: Standard)
D□	With DIN rail (Rail length: Special) Note 2)
K	Special wiring specifications Note 3)
N	With name plate
R	External pilot Note 4)
S	Direct exhaust with built-in silencer Note 5)
T	Branched P and R ports on U side Note 6)

\* When specifying more than one option, enter symbols in alphabetical order.  
Example: -BRS  
Note 1) When using the back pressure check valve for the necessary stations only, enter the back pressure check valve part no. and indicate the number of manifold stations on the specification sheet.  
Note 2) For special DIN rail length, indicate "D□". (Enter the number of stations inside □.)  
Example: -D08  
In this case, stations will be mounted on a DIN rail for 8 stations regardless of the actual number of manifold stations. The specified number of stations must be larger than the number of stations on the manifold.  
Indicate "-D0" for the option without DIN rail.  
Note 3) Be sure to indicate the wiring specifications on the specification sheet.  
Note 4) For external pilot option, "-R", indicate the external pilot specification "R" for the applicable valves as well.  
Note 5) The built-in silencer type does not satisfy the IP67 standard.  
Note 6) The SUP and EXH ports on U side are branched (toward the cylinder port and coil) with ø12 one-touch fittings for connection.

**Input block COM. (Fill out for I/O unit only)**

Nil	PNP (+) or without SI unit/input block
N	NPN (-)

**Input block type (Fill out for I/O unit only)**

Nil	Without input block
1	M12, 2 inputs
2	M12, 4 inputs
3	M8, 4 inputs (3 pins)

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

## How to Order Valves

**VQC 2 1 0 0 5**

**Series**  
2 VQC2000

**Type of actuation**

1	2 position single (A)(B) 4 2 5 1 3 (R1)(P)(R2)	<b>A</b> Note)	4 position dual 3 port valve (A) (A) (B) 4 4 2 5 1 3 (R1) 1 (R2) N.C (P) N.C
	2 position double (metal) (A)(B) 4 2 5 1 3 (R1)(P)(R2)	<b>B</b> Note)	4 position dual 3 port valve (B) (A) (B) 4 4 2 5 1 3 (R1) 1 (R2) N.O (P) N.O
2	2 position double (rubber) (A)(B) 4 2 5 1 3 (R1)(P)(R2)	<b>C</b> Note)	4 position dual 3 port valve (C) (A) (B) 4 4 2 5 1 3 (R1) 1 (R2) N.C (P) N.O
	3 position closed center (A)(B) 4 2 5 1 3 (R1)(P)(R2)	Note) For rubber seal type only.	
3	3 position exhaust center (A)(B) 4 2 5 1 3 (R1)(P)(R2)		
4	3 position pressure center (A)(B) 4 2 5 1 3 (R1)(P)(R2)		
5			

**Manual override**

**Nil:** Non-locking push type (Slotted)  
**B:** Locking type (Slotted)  
**C:** Locking type (Manual)  
**D:** Slide locking type (Manual)

**Light/Surge voltage suppressor**

Nil	With
E	Without Note)

Note) Not applicable to S kit.

**Coil voltage**

5	24 VDC Note)
6	12 VDC

Note) S kit is only available for 24 VDC.

**Function**









Nil	Standard type (1 W)
K Note 1)	High pressure type (1.0 MPa)
N	Negative COM
R Note 2)	External pilot
Y	Low wattage type (0.5 W)

\* When specifying more than one option, enter symbols in alphabetical order.  
Note 1) For metal seal type only.  
Note 2) Not applicable for dual 3 port valve.

**Seal type**


0	Metal seal
1	Rubber seal

### Kit Designation/Electrical Entry/Cable Length


<p><b>S</b> Kit (Decentralized wiring type serial kit)</p>  <p>Serial unit: <b>EX500</b> IP67 compliant</p> <p>Note) A separate gateway unit and communication cable are required.</p> <table border="1"> <tr> <td>SD0</td> <td>Serial kit without SI unit</td> <td></td> </tr> <tr> <td>SDA1</td> <td>Serial kit for Remote I/O</td> <td>1 to 8 stations (16 stations)</td> </tr> <tr> <td>SDA2</td> <td>Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK</td> <td></td> </tr> </table>	SD0	Serial kit without SI unit		SDA1	Serial kit for Remote I/O	1 to 8 stations (16 stations)	SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK		<p><b>S</b> Kit (I/O serial kit)</p>  <p>Serial unit: <b>EX250</b> IP67 compliant</p> <table border="1"> <tr> <td>SD0</td> <td>Serial kit without SI unit</td> <td></td> </tr> <tr> <td>SDY</td> <td>Serial kit for CANopen</td> <td></td> </tr> <tr> <td>SDQ</td> <td>Serial kit for DeviceNet</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td>SDN</td> <td>Serial kit for PROFIBUS-DP</td> <td></td> </tr> <tr> <td>SDV</td> <td>Serial kit for CC-LINK</td> <td></td> </tr> <tr> <td>SDTA</td> <td>AS-4, 8 in/out, 31 slave modes, 2 power supply systems</td> <td>1 to 4 stations (8 stations)</td> </tr> <tr> <td>SDTB</td> <td>AS-4, 4 in/out, 31 slave modes, 2 power supply systems</td> <td>1 to 2 stations (4 stations)</td> </tr> <tr> <td>SDTC</td> <td>AS-4, 8 in/out, 31 slave modes, 1 power supply systems</td> <td>1 to 4 stations (8 stations)</td> </tr> <tr> <td>SDTD</td> <td>AS-4, 4 in/out, 31 slave modes, 1 power supply systems</td> <td>1 to 2 stations (4 stations)</td> </tr> </table>	SD0	Serial kit without SI unit		SDY	Serial kit for CANopen		SDQ	Serial kit for DeviceNet	1 to 12 stations (24 stations)	SDN	Serial kit for PROFIBUS-DP		SDV	Serial kit for CC-LINK		SDTA	AS-4, 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)	SDTB	AS-4, 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)	SDTC	AS-4, 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)	SDTD	AS-4, 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)	<p><b>S</b> Kit (Serial output kit)</p>  <p>Serial unit: <b>EX126</b> IP67 compliant</p> <table border="1"> <tr> <td>SDVB</td> <td>Serial kit for CC-LINK</td> <td>1 to 8 stations (16 stations)</td> </tr> </table>	SDVB	Serial kit for CC-LINK	1 to 8 stations (16 stations)	<p><b>F</b> Kit (D-sub connector kit)</p>  <p>25 pins</p> <p>IP40 compliant</p> <table border="1"> <tr> <td>FD0</td> <td>D-sub connector kit (25P) without cable</td> <td></td> </tr> <tr> <td>FD1</td> <td>D-sub connector kit (25P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td>FD2</td> <td>D-sub connector kit (25P) with 3.0 m cable</td> <td></td> </tr> <tr> <td>FD3</td> <td>D-sub connector kit (25P) with 5.0 m cable</td> <td></td> </tr> </table>	FD0	D-sub connector kit (25P) without cable		FD1	D-sub connector kit (25P) with 1.5 m cable	1 to 12 stations (24 stations)	FD2	D-sub connector kit (25P) with 3.0 m cable		FD3	D-sub connector kit (25P) with 5.0 m cable	
SD0	Serial kit without SI unit																																																					
SDA1	Serial kit for Remote I/O	1 to 8 stations (16 stations)																																																				
SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK																																																					
SD0	Serial kit without SI unit																																																					
SDY	Serial kit for CANopen																																																					
SDQ	Serial kit for DeviceNet	1 to 12 stations (24 stations)																																																				
SDN	Serial kit for PROFIBUS-DP																																																					
SDV	Serial kit for CC-LINK																																																					
SDTA	AS-4, 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)																																																				
SDTB	AS-4, 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)																																																				
SDTC	AS-4, 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)																																																				
SDTD	AS-4, 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)																																																				
SDVB	Serial kit for CC-LINK	1 to 8 stations (16 stations)																																																				
FD0	D-sub connector kit (25P) without cable																																																					
FD1	D-sub connector kit (25P) with 1.5 m cable	1 to 12 stations (24 stations)																																																				
FD2	D-sub connector kit (25P) with 3.0 m cable																																																					
FD3	D-sub connector kit (25P) with 5.0 m cable																																																					
<p><b>P</b> Kit (Flat ribbon cable kit)</p>  <p>26 pins 20 pins</p> <p>Note) For a 20P flat ribbon cable, the cable assembly must be ordered separately.</p> <table border="1"> <tr> <td>PD0</td> <td>Flat ribbon cable kit (26P) without cable</td> <td></td> </tr> <tr> <td>PD1</td> <td>Flat ribbon cable kit (26P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td>PD2</td> <td>Flat ribbon cable kit (26P) with 3.0 m cable</td> <td></td> </tr> <tr> <td>PD3</td> <td>Flat ribbon cable kit (26P) with 5.0 m cable</td> <td></td> </tr> <tr> <td>PDC</td> <td>Flat ribbon cable kit (20P) without cable</td> <td>1 to 9 stations (18 stations)</td> </tr> </table>	PD0	Flat ribbon cable kit (26P) without cable		PD1	Flat ribbon cable kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)	PD2	Flat ribbon cable kit (26P) with 3.0 m cable		PD3	Flat ribbon cable kit (26P) with 5.0 m cable		PDC	Flat ribbon cable kit (20P) without cable	1 to 9 stations (18 stations)	<p><b>T</b> Kit (Terminal block box kit)</p>  <p>IP67 compliant</p> <table border="1"> <tr> <td>TD0</td> <td>Terminal block box kit</td> <td>1 to 10 stations (20 stations)</td> </tr> </table>	TD0	Terminal block box kit	1 to 10 stations (20 stations)	<p><b>L</b> Kit (Lead wire kit)</p>  <p>25 core cable</p> <p>IP67 compliant</p> <table border="1"> <tr> <td>LD0</td> <td>Lead wire kit (25 core) 0.6 m lead wire</td> <td></td> </tr> <tr> <td>LD1</td> <td>Lead wire kit (25 core) 1.5 m lead wire</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td>LD2</td> <td>Lead wire kit (25 core) 3.0 m lead wire</td> <td></td> </tr> </table>	LD0	Lead wire kit (25 core) 0.6 m lead wire		LD1	Lead wire kit (25 core) 1.5 m lead wire	1 to 12 stations (24 stations)	LD2	Lead wire kit (25 core) 3.0 m lead wire		<p><b>M</b> Kit (Multiple connector kit)</p>  <p>26 pins</p> <p>IP67 compliant</p> <table border="1"> <tr> <td>MD0</td> <td>Multiple connector kit (26P) without cable</td> <td></td> </tr> <tr> <td>MD1</td> <td>Multiple connector kit (26P) with 1.5 m cable</td> <td>1 to 12 stations (24 stations)</td> </tr> <tr> <td>MD2</td> <td>Multiple connector kit (26P) with 3.0 m cable</td> <td></td> </tr> <tr> <td>MD3</td> <td>Multiple connector kit (26P) with 5.0 m cable</td> <td></td> </tr> </table>	MD0	Multiple connector kit (26P) without cable		MD1	Multiple connector kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)	MD2	Multiple connector kit (26P) with 3.0 m cable		MD3	Multiple connector kit (26P) with 5.0 m cable													
PD0	Flat ribbon cable kit (26P) without cable																																																					
PD1	Flat ribbon cable kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)																																																				
PD2	Flat ribbon cable kit (26P) with 3.0 m cable																																																					
PD3	Flat ribbon cable kit (26P) with 5.0 m cable																																																					
PDC	Flat ribbon cable kit (20P) without cable	1 to 9 stations (18 stations)																																																				
TD0	Terminal block box kit	1 to 10 stations (20 stations)																																																				
LD0	Lead wire kit (25 core) 0.6 m lead wire																																																					
LD1	Lead wire kit (25 core) 1.5 m lead wire	1 to 12 stations (24 stations)																																																				
LD2	Lead wire kit (25 core) 3.0 m lead wire																																																					
MD0	Multiple connector kit (26P) without cable																																																					
MD1	Multiple connector kit (26P) with 1.5 m cable	1 to 12 stations (24 stations)																																																				
MD2	Multiple connector kit (26P) with 3.0 m cable																																																					
MD3	Multiple connector kit (26P) with 5.0 m cable																																																					

**Manifold Option**


Blanking plate assembly  
VVQ2000-10A-1




SUP block plate  
VVQ2000-16A




Perfect block  
VVQ2000-FPG-□□




Dual flow fitting assembly  
VVQ2000-52A-C10




Individual SUP spacer  
VVQ2000-P-1-C8




Elbow fitting assembly  
VVQ2000-F-L□




Port plug  
VVQ1000-58A




Individual EXH spacer  
VVQ2000-R-1-C8



EXH block plate  
VVQ2000-19A



Electrical wiring specifications [-K]

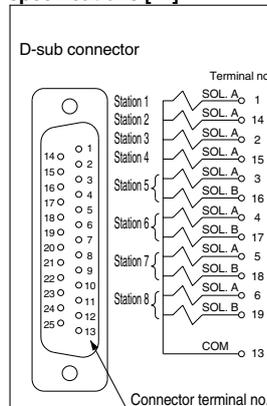

DIN rail mounting bracket [-D]  
VVQ2000-57A


for (F, L, M, P, S (EX500) kit)

VVQ2000-57A-S


for (S (EX250) kit)

VVQ2000-57A-T


for (T, S (EX126) kit)



Silencer (for EXH port)  
AN200-KM10




Back pressure check valve assembly [-B]  
VVQ2000-18A




Name plate [-N]  
VVQ2000-N-Stations


(1 to max. no. of stations)



Direct EXH outlet with built-in silencer [-S]



Blanking plug  
KQ2P-□



VQC

SQ

VQ0

VQ4

VQ5

VQZ


VQD



# Series VQC4000

## Base Mounted Plug-in Unit

### How to Order Manifold

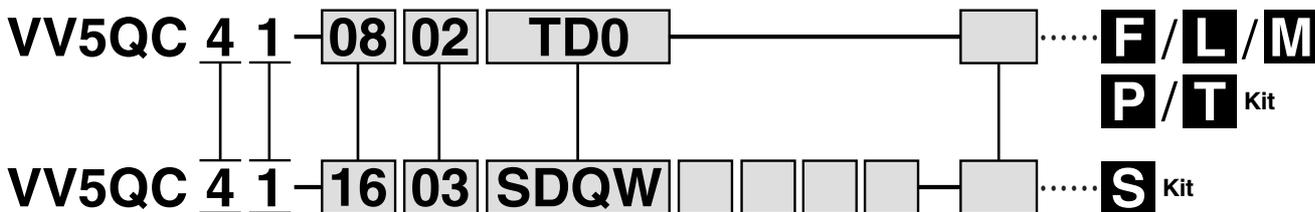

**Series**  
4 VQC4000

**Manifold model**  
1 Plug-in unit

**Stations**  
01 1 station  
⋮  
⋮

The maximum number of stations differs depending on the electrical entry.

**Cylinder port size**

C8	With ø8 One-touch fitting
C10	With ø10 One-touch fitting
C12	With ø12 One-touch fitting
02	Rc 1/4
03	Rc 3/8
B	Bottom ported Rc 1/4
CM	Mixed

Note 1) Indicate the size in the specification order sheet in the case of "CM".  
Note 2) Symbols for inch sizes are as follows:  
->For One-touch fittings->  
N7: ø1/4"  
N9: ø5/16"  
N11: ø3/8"  
NM: Mixed

**Option**

Nil	None
K	Special wiring specifications (except for double wiring) <sup>Note 1)</sup>
N	With name plate (available for T kit only) <sup>Note 2)</sup>

\* When specifying more than one option, enter symbols in alphabetical order. Example: -KN  
Note 1) Be sure to indicate the wiring specifications on the specification order sheet.  
Note 2) The mounting position of the name plate is on the top face of the cover for the terminal block box.

**Input block COM. (Fill out for I/O unit only)**

Nil	PNP (+) or without SI unit/input block
N	NPN (-)

**Input block (Fill out for I/O unit only)**

Nil	Without SI unit/input block (SD0(W))
0	Without input block
1	With 1 input block
⋮	⋮
8	With 8 input blocks

Note) Max. 4 for EX240 and max 8 for EX250.

**SI unit COM.**




SI unit COM	EX240			EX250				EX500				EX126
	DeviceNet	PROFIBUS-DP	DeviceNet	PROFIBUS-DP	CC-LINK	AS-i	CANopen	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O	CC-LINK
Nil +COM	○	—	—	—	○	—	—	○	○	○	○	○
N -COM	—	○	○	○	—	○	○	○	○	○	○	—

Note) Leave the box blank for the SI unit COM. without SI unit (SD0).

**Input block type (Fill out for I/O unit only)**

Nil	Without input block
0	M12, 8 inputs (EX240)
1	M12, 2 inputs (EX250)
2	M12, 4 inputs (EX250)
3	M8, 4 inputs (EX250)

**Kit Designation/Electrical Entry/Cable Length**


S Kit (Decentralized wiring type serial kit)	S Kit (I/O serial kit)	S Kit (I/O serial transmission kit)	S Kit (Serial output kit)																																																
 <p>Serial unit: EX500 IP67 compliant</p>	 <p>Serial unit: EX250 IP67 compliant</p>	 <p>Serial unit: EX240 IP65 compliant</p>	 <p>Serial unit: EX126 IP67 compliant</p>																																																
<table border="1"> <tr><td>SD0</td><td>Serial kit without SI unit</td><td>1 to 8 stations (16 stations)</td></tr> <tr><td>SDA1</td><td>Serial kit for Remote I/O</td><td>1 to 8 stations (16 stations)</td></tr> <tr><td>SDA2</td><td>Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK</td><td>1 to 8 stations (16 stations)</td></tr> </table>	SD0	Serial kit without SI unit	1 to 8 stations (16 stations)	SDA1	Serial kit for Remote I/O	1 to 8 stations (16 stations)	SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	1 to 8 stations (16 stations)	<table border="1"> <tr><td>SD0</td><td>Serial kit without SI unit</td><td>1 to 4 stations (8 stations)</td></tr> <tr><td>SDY</td><td>Serial kit for CANopen</td><td>1 to 2 stations (4 stations)</td></tr> <tr><td>SDQ</td><td>Serial kit for DeviceNet</td><td>1 to 4 stations (8 stations)</td></tr> <tr><td>SDN</td><td>Serial kit for PROFIBUS-DP</td><td>1 to 4 stations (8 stations)</td></tr> <tr><td>SDV</td><td>Serial kit for CC-LINK</td><td>1 to 2 stations (4 stations)</td></tr> <tr><td>SDTA</td><td>AS-i, 8 in/out, 31 slave modes, 2 power supply systems</td><td>1 to 4 stations (8 stations)</td></tr> <tr><td>SDTB</td><td>AS-i, 4 in/out, 31 slave modes, 2 power supply systems</td><td>1 to 2 stations (4 stations)</td></tr> <tr><td>SDTC</td><td>AS-i, 8 in/out, 31 slave modes, 1 power supply systems</td><td>1 to 4 stations (8 stations)</td></tr> <tr><td>SDTD</td><td>AS-i, 4 in/out, 31 slave modes, 1 power supply systems</td><td>1 to 2 stations (4 stations)</td></tr> </table>	SD0	Serial kit without SI unit	1 to 4 stations (8 stations)	SDY	Serial kit for CANopen	1 to 2 stations (4 stations)	SDQ	Serial kit for DeviceNet	1 to 4 stations (8 stations)	SDN	Serial kit for PROFIBUS-DP	1 to 4 stations (8 stations)	SDV	Serial kit for CC-LINK	1 to 2 stations (4 stations)	SDTA	AS-i, 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)	SDTB	AS-i, 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)	SDTC	AS-i, 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)	SDTD	AS-i, 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)	<table border="1"> <tr><td>SD0W</td><td>Serial kit without SI unit</td><td>1 to 12 stations (16 stations)</td></tr> <tr><td>SDQW</td><td>Serial kit for DeviceNet</td><td>1 to 12 stations (16 stations)</td></tr> <tr><td>SDNW</td><td>Serial kit for PROFIBUS-DP</td><td>1 to 12 stations (16 stations)</td></tr> </table>	SD0W	Serial kit without SI unit	1 to 12 stations (16 stations)	SDQW	Serial kit for DeviceNet	1 to 12 stations (16 stations)	SDNW	Serial kit for PROFIBUS-DP	1 to 12 stations (16 stations)	<table border="1"> <tr><td>SDVB</td><td>Serial kit for CC-LINK</td><td>1 to 8 stations (16 stations)</td></tr> </table>	SDVB	Serial kit for CC-LINK	1 to 8 stations (16 stations)
SD0	Serial kit without SI unit	1 to 8 stations (16 stations)																																																	
SDA1	Serial kit for Remote I/O	1 to 8 stations (16 stations)																																																	
SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	1 to 8 stations (16 stations)																																																	
SD0	Serial kit without SI unit	1 to 4 stations (8 stations)																																																	
SDY	Serial kit for CANopen	1 to 2 stations (4 stations)																																																	
SDQ	Serial kit for DeviceNet	1 to 4 stations (8 stations)																																																	
SDN	Serial kit for PROFIBUS-DP	1 to 4 stations (8 stations)																																																	
SDV	Serial kit for CC-LINK	1 to 2 stations (4 stations)																																																	
SDTA	AS-i, 8 in/out, 31 slave modes, 2 power supply systems	1 to 4 stations (8 stations)																																																	
SDTB	AS-i, 4 in/out, 31 slave modes, 2 power supply systems	1 to 2 stations (4 stations)																																																	
SDTC	AS-i, 8 in/out, 31 slave modes, 1 power supply systems	1 to 4 stations (8 stations)																																																	
SDTD	AS-i, 4 in/out, 31 slave modes, 1 power supply systems	1 to 2 stations (4 stations)																																																	
SD0W	Serial kit without SI unit	1 to 12 stations (16 stations)																																																	
SDQW	Serial kit for DeviceNet	1 to 12 stations (16 stations)																																																	
SDNW	Serial kit for PROFIBUS-DP	1 to 12 stations (16 stations)																																																	
SDVB	Serial kit for CC-LINK	1 to 8 stations (16 stations)																																																	

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD




**Manifold Option**


Blanking plate assembly  
VVQ4000-10A-1




Individual SUP spacer  
VVQ4000-P-1-02  
03




Individual EXH spacer  
VVQ4000-R-1-02  
03




SUP/EXH block plate  
VVQ4000-16A




Throttle valve spacer  
VVQ4000-20A-1




Residual pressure release valve  
perfect spacer  
VVQ4000-25A-1 (Note 1)



SUP stop valve spacer  
VVQ4000-37A-1



Interface regulator  
ARBQ4000-00-0-1



- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

 Note 1) Perfect spacers with residual pressure release valve cannot be combined with external pilot specifications.

# Series VQC


## Base Mounted

# Plug-in Unit




### JIS Symbol


2 position single




2 position double (metal)




2 position double (rubber)




3 position closed center




3 position exhaust center




3 position pressure center




3 position exhaust center with pressure release valves




4 position dual 3 port valve (A)



4 position dual 3 port valve (B)



4 position dual 3 port valve (C)



2-2-22

### Model

Series	No. of solenoids	Model	Flow characteristics						Response time (ms) <sup>Note 2)</sup>		Weight (g)			
			1 → 4, 2 (P → A, B)			4, 2 → 5, 3 (A, B → R1, R2)			Standard: 1 W	Low wattage				
			C[dm <sup>3</sup> /(s·bar)]	b	C <sub>v</sub>	C[dm <sup>3</sup> /(s·bar)]	b	C <sub>v</sub>						
VQC1000	2 position	Single	Metal seal	VQC1100	0.70	0.15	0.16	0.72	0.25	0.18	12 or less	15 or less	64	
			Rubber seal	VQC1101	0.85	0.20	0.21	1.0	0.30	0.25	15 or less	20 or less		
		Double	Metal seal	VQC1200	0.70	0.15	0.16	0.72	0.25	0.18	10 or less	13 or less		
			Rubber seal	VQC1201	0.85	0.20	0.21	1.0	0.30	0.25	15 or less	20 or less		
	3 position	Closed center	Metal seal	VQC1300	0.68	0.15	0.16	0.72	0.25	0.18	20 or less	26 or less		78
			Rubber seal	VQC1301	0.70	0.20	0.16	0.65	0.42	0.18	25 or less	33 or less		
		Exhaust center	Metal seal	VQC1400	0.68	0.15	0.16	0.72	0.25	0.18	20 or less	26 or less		
			Rubber seal	VQC1401	0.70	0.20	0.16	1.0	0.30	0.25	25 or less	33 or less		
		Pressure center	Metal seal	VQC1500	0.70	0.15	0.16	0.72	0.25	0.18	20 or less	26 or less		
			Rubber seal	VQC1501	0.85	0.20	0.21	0.65	0.42	0.18	25 or less	33 or less		
4 position	Dual 3 port valve	Rubber seal	VQC1 <sup>A</sup> <sub>C</sub> 01	0.70	0.20	0.16	0.70	0.20	0.16	25 or less	33 or less			
VQC2000	2 position	Single	Metal seal	VQC2100	2.0	0.15	0.46	2.6	0.15	0.60	22 or less	29 or less	90	
			Rubber seal	VQC2101	2.2	0.28	0.55	3.2	0.30	0.80	24 or less	31 or less		
		Double	Metal seal	VQC2200	2.0	0.15	0.46	2.6	0.15	0.60	15 or less	20 or less		
			Rubber seal	VQC2201	2.2	0.28	0.55	3.2	0.30	0.80	20 or less	26 or less		
	3 position	Closed center	Metal seal	VQC2300	2.0	0.15	0.46	2.0	0.18	0.46	29 or less	38 or less		110
			Rubber seal	VQC2301	2.0	0.28	0.49	2.2	0.31	0.60	34 or less	44 or less		
		Exhaust center	Metal seal	VQC2400	2.0	0.15	0.46	2.6	0.15	0.60	29 or less	38 or less		
			Rubber seal	VQC2401	2.0	0.28	0.49	3.2	0.30	0.80	34 or less	44 or less		
		Pressure center	Metal seal	VQC2500	2.4	0.17	0.57	2.0	0.18	0.46	29 or less	38 or less		
			Rubber seal	VQC2501	3.2	0.28	0.80	2.2	0.31	0.60	34 or less	44 or less		
4 position	Dual 3 port valve	Rubber seal	VQC2 <sup>A</sup> <sub>C</sub> 01	1.8	0.28	0.46	1.8	0.28	0.46	34 or less	44 or less			
VQC4000	2 position	Single	Metal seal	VQC4100	6.2	0.19	1.5	6.9	0.17	1.7	20 or less	22 or less	230	
			Rubber seal	VQC4101	7.2	0.43	2.1	7.3	0.38	2.0	25 or less	27 or less		
		Double	Metal seal	VQC4200	6.2	0.19	1.5	6.9	0.17	1.7	12 or less	12 or less		
			Rubber seal	VQC4201	7.2	0.43	2.1	7.3	0.38	2.0	15 or less	15 or less		
	3 position	Closed center	Metal seal	VQC4300	5.9	0.23	1.5	6.3	0.18	1.6	45 or less	47 or less	280	
			Rubber seal	VQC4301	7.0	0.34	1.9	6.4	0.42	1.9	50 or less	52 or less		
		Exhaust center	Metal seal	VQC4400	6.2	0.18	1.5	6.9	0.17	1.7	45 or less	47 or less		
			Rubber seal	VQC4401	7.0	0.38	1.9	7.3	0.38	2.0	50 or less	52 or less		
		Pressure center	Metal seal	VQC4500	6.2	0.18	1.9	6.4	0.18	1.6	45 or less	47 or less		
			Rubber seal	VQC4501	7.0	0.38	1.9	7.1	0.38	2.0	50 or less	52 or less		
Perfect	Metal seal	VQC4600	2.7	—	—	3.7	—	—	55 or less	57 or less	500			
	Rubber seal	VQC4601	2.8	—	—	3.9	—	—	62 or less	64 or less				



Note 1) Values represented in this column are in the following conditions:

VQC1000: Cylinder port size C6 without a back pressure check valve

VQC2000: Cylinder port size C8 without a back pressure check valve


VQC4000: Cylinder port size Rc 3/8

Note 2) Values represented in this column are based on JIS B 8375-1981 (operating with clean air and a supply pressure of 0.5 MPa. Equipped with light/surge voltage suppressor. Values vary depending on the pressure as well as the air quality.) Values for double types are when the switch is ON.



Series VQC

**S** VQC1000/2000/4000 Kit (Serial transmission kit) Decentralized Serial Wiring



Gateway type serial transmission system

- Since wiring is "prepackaged" into one multi-connector type cable, wiring work is not only made easier, but much more accurate.

S kit can be used by connecting to gateway unit.

Gateway (GW) Unit IP65 compliant



How to Order

**EX500 — G DN1**

Communication protocol

DN1	DeviceNet	AB1-X1	Remote I/O (RIO)
PR1A	PROFIBUS-DP	MJ1	CC-LINK

Specifications

Model	EX500-GAB1-X1	EX500-GDN1	EX500-GPR1A	EX500-GMJ1
Applicable PLC/Communication protocol	Rockwell Automation PLC	DeviceNet Release 2.0	PROFIBUS-DP (EN50170)	CC-LINK Ver. 1.10
Communication speed	57.6/115.2/230.4 kbit/sec	125/250/500 kbit/sec	9.6/19.2/45.45/93.75/187.5/500 kbit/sec 1.5/3/6/12 Mbit/sec	156/625 kbit/sec 2.5/5/10 Mbit/sec
Rated voltage	24 VDC			
Power supply voltage range	Input and control unit power supply: 24 VDC ± 10% Solenoid valve power supply: 24 VDC + 10%/–5% (with power drop warning at approx. 20 V)			
	—	Communication power supply for DeviceNet 11 to 25 VDC	—	—
Current consumption	200 mA or less (Single GW unit)			
	—	Communication power supply for DeviceNet 50 mA or less	—	—
Number of inputs/outputs	Maximum 64 inputs/64 outputs			
Number of input/output branches	4 branches (16 inputs/16 outputs per branch)			
Branch cable	8 core heavy duty cable			
Branch cable length	5 m or less (total extension 10 m or less)			
Communication connector	M12 connector (8 pins, socket)			
Power connector	M12 connector (5 pins, plug)			
Ambient operating temperature/humidity	+5 to +45°C at 35% to 85% RH (No condensation)			
Enclosure	IP65			
Applicable standard	UL, CSA, CE			
Weight (g)	470			

Input Block IP67 compliant

How to Order Input Manifold

**EEX500 — IB1 — E 8**

Input unit specifications

Connector type	
E	M8 connector
T	M12 connector
M	M8 and M12 mixed

Stations	
1	1 station
...	...
8	8 stations

Applicable GW unit

Nil	DeviceNet
	PROFIBUS-DP
-X1	Remote I/O (RIO)



Note) When ordering an input block manifold, enter the [Input manifold part no.] + [Input block part no.] together. The input block, end block and DIN rail are included in the input manifold.

How to Order Input Block

**EX500 — IE 1**

Block type

1	M8 connector, PNP specifications
2	M8 connector, NPN specifications
3	M12 connector, PNP specifications
4	M12 connector, NPN specifications
5	8-point integrated type, M8 connector, PNP specifications
6	8-point integrated type, M8 connector, NPN specifications

Applicable GW unit

Nil	DeviceNet
	PROFIBUS-DP
-X1	Remote I/O (RIO)

\* With waterproof cap

Input Unit Specifications

Connection block	Current source type input block (PNP input block) or Current sink type input block (NPN input block)
Communication connector	M12 connector (8 pins, plug)
Number of connection blocks	Maximum 8 blocks
Block supply voltage	24 VDC
Block supply current	0.65 A maximum
Current consumption	100 mA or less (at rated voltage)
Short circuit protection	Operates at 1A Typ. (power supply cut) GW unit reset by turning power OFF and back ON.
Enclosure	IP65
Weight (g) <small>Note)</small>	100 (Input unit + end block)

Note) Not including the DIN rail weight.

Input Block Specifications

Applicable sensor	Current source type (PNP output) or Current sink type (NPN output)
Sensor connector	M8 connector (3 pins) or, M12 connector (4 pins)
Number of inputs	2 inputs/8 inputs (M8 only)
Rated voltage	24 VDC
Indication	Green LED
Insulation	None
Sensor supply current	Maximum 30 mA/Sensor
Enclosure	IP65
Weight (g)	[For M8: 20] [For M12: 40] [8 point integrated type, for M8: 55]



SI Unit

How to Order

EX500 – Q001

• Applicable GW unit

Nil	DeviceNet PROFIBUS-DP
-X1	Remote I/O (RIO)

Specifications

Connection block	Solenoid valve (single, double) Relay output module (1 output, 2 outputs)
Communication connector	M12 connector (8 pins, plug, socket)
Number of connection block stations	Double solenoid valve Relay output module (2 points): Maximum 8 stations Single solenoid valve Relay output module (1 point): Maximum 16 stations
Block supply voltage	24 VDC
Block supply current	0.65 A maximum
Current consumption	100 mA or less (at rated voltage)
Weight (g)	115

VQC

SQ

VQ0

VQ4

VQ5

VQZ

VQD

Cable

How to Order Cable with M12 Connector

EX500 – AC 030 – SSPS



Cable length

003	0.3 m
005	0.5 m
010	1 m
030	3 m
050	5 m

Connector specifications

SSPS	Socket side: Straight Plug side: Straight
SAPA	Socket side: Angle Plug side: Angle

How to Order Power Cable with Connector

EX500 – AP 050 – S





Cable length

010	1 m
050	5 m

Connector specifications

S	Straight
A	Angle

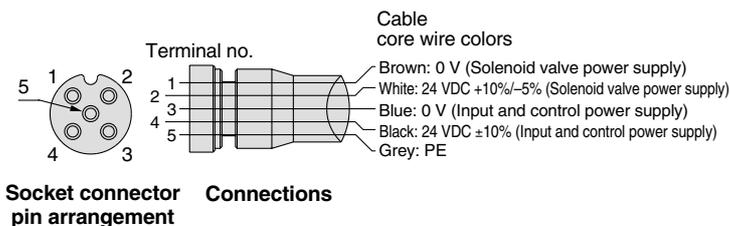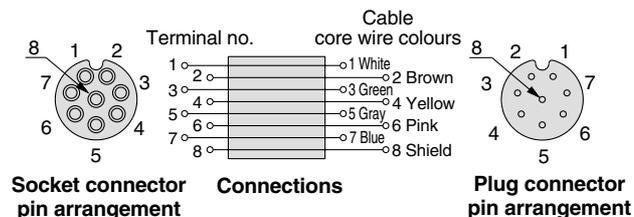




VQC1000/2000/4000

Kit (Serial transmission kit) Decentralized Serial Wiring IP67 compliant

VV5QC11

SA1 Kit (Serial transmission kit: EX500)

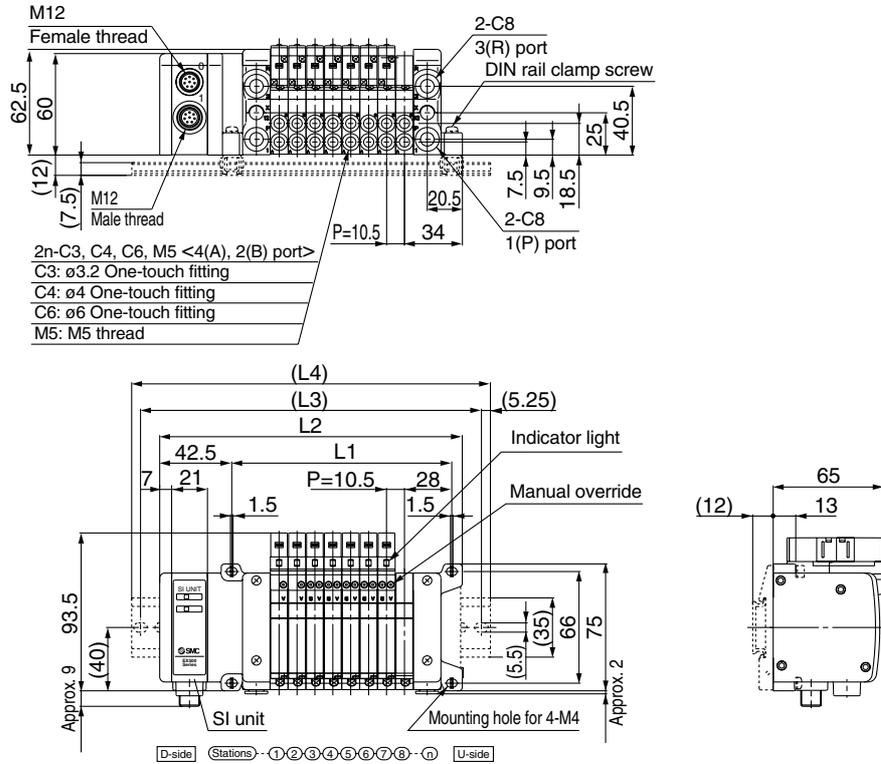

Formulas


$L1 = 10.5n + 45$  (Maximum 16 single wiring stations)

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213
L2	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5	230	240.5	251	261.5
L3	125	137.5	150	162.5	175	187.5	187.5	200	212.5	225	237.5	250	250	262.5	275	287.5
L4	135.5	148	160.5	173	185.5	198	198	210.5	223	235.5	248	260.5	260.5	273	285.5	298

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

VV5QC21  
SA1 Kit  
(Serial transmission kit: EX500)

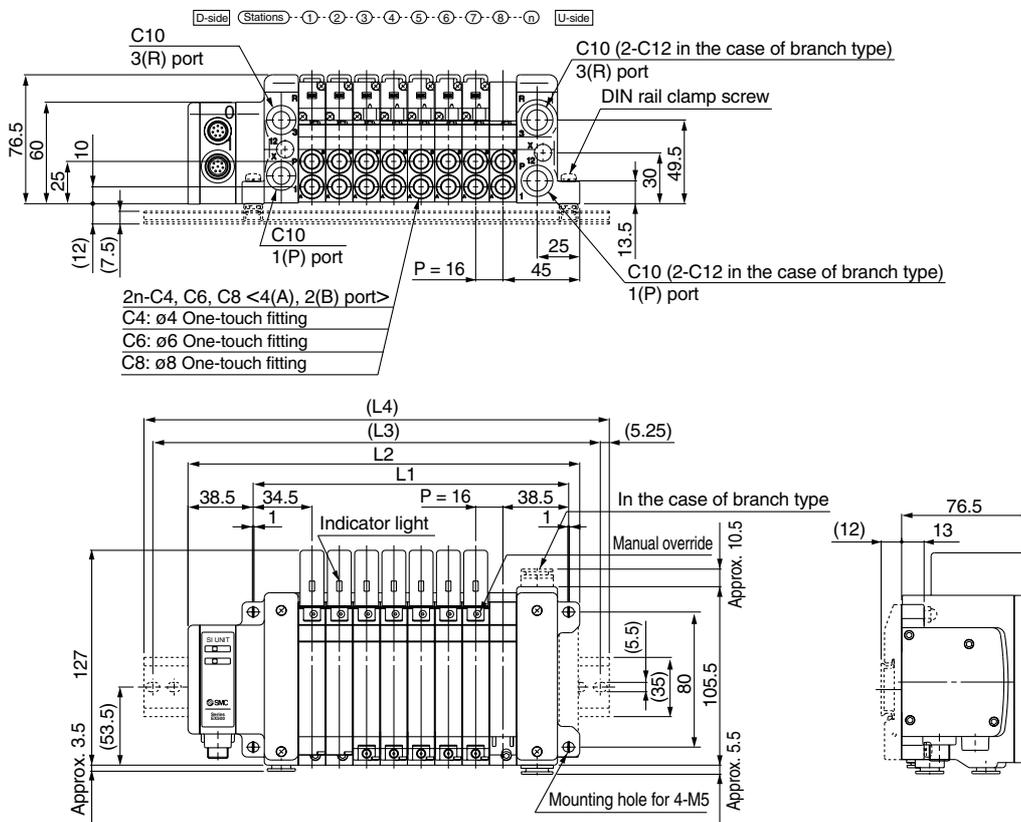

VQC

SQ

VQ0

VQ4

VQ5

VQZ

VQD

Formulas


$L1 = 16n + 57$  (Maximum 16 single wiring stations)

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313
L2	118	134	150	166	182	198	214	230	246	262	278	294	310	326	342	358
L3	137.5	150	175	187.5	200	212.5	237.5	250	262.5	287.5	300	312.5	337.5	350	362.5	375
L4	148	160.5	185.5	198	210.5	223	248	260.5	273	298	310.5	323	348	360.5	373	385.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

**VV5QC41**  
**SA1 Kit (Serial transmission kit: EX500)**

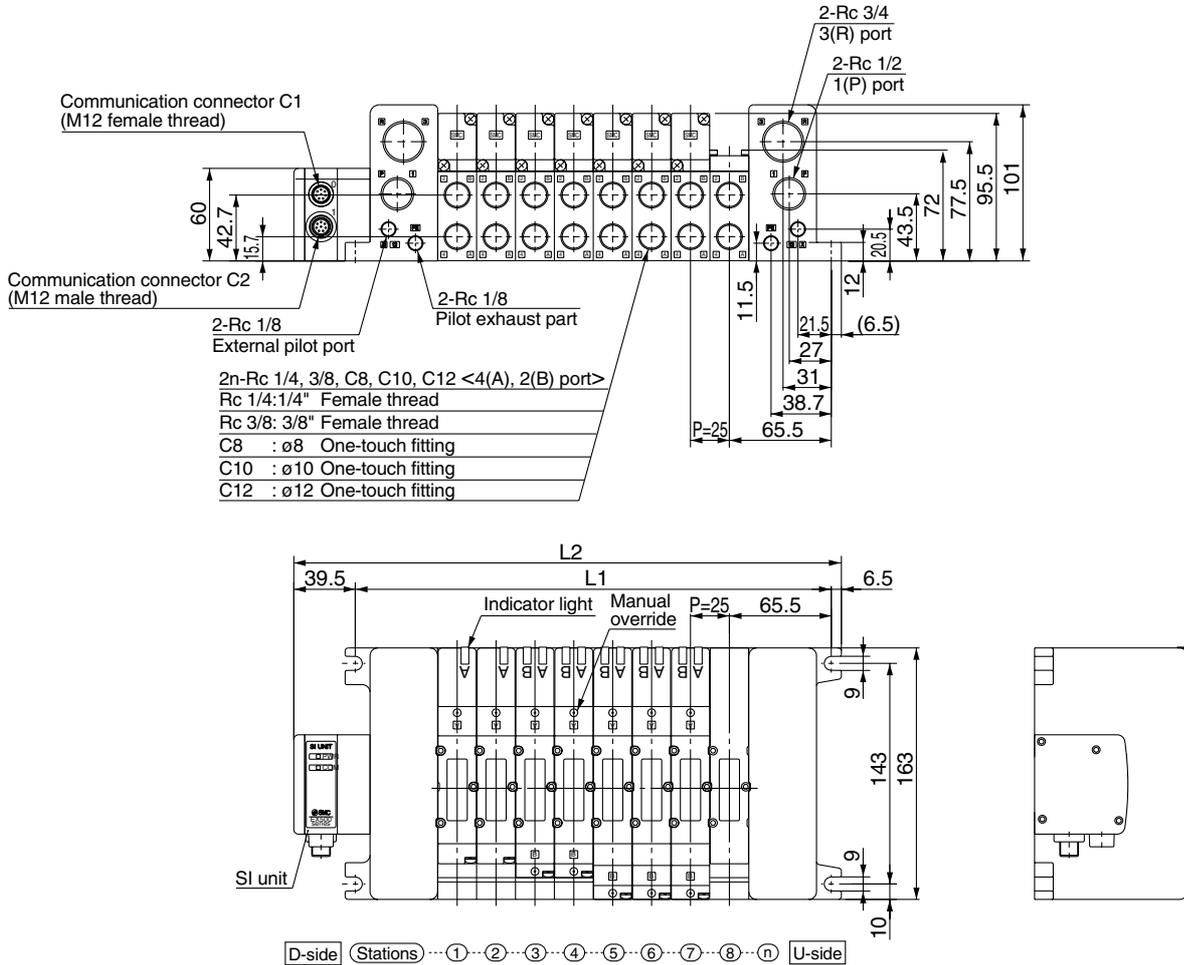


Formulas  
 $L1 = 25n + 106$  (Maximum 16 single wiring stations) n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	177	202	227	252	277	302	327	352	377	402	427	452	477	502	527	552



**S** VQC1000/2000/4000  
Kit (Serial Transmission Kit) for I/O IP67 compliant

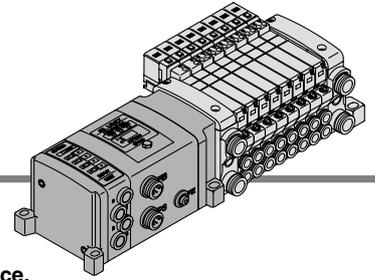

Compatible network **DeviceNet/PROFIBUS-DP/CC-Link**

• The serial transmission system greatly reduces connection work, minimizes wiring, and saves space.

**SI unit for DeviceNet/PROFIBUS-DP/CC-LINK**

As a DeviceNet/PROFIBUS-DP/CC-LINK slave unit, this kit is capable of up to 32 points of solenoid valve ON and OFF control. Furthermore, by connecting an input block, a maximum 32 sensor signal inputs are possible.

**SI unit for AS-i**


As a AS-i slave unit, this kit is capable of up to 4 or 8 points of solenoid valve ON and OFF control. Furthermore, by connecting an input block, a maximum 4 or 8 sensor signal inputs are possible.

**Input block**

This expansion block connects to the SI unit and allows for sensor input to the auto switches.

Each input block can receive input from up to two or four sensors, and the common can be matched to the sensor by an NPN/PNP selector switch. Input connectors are available in both M8 and M12 types.


**Connector Details**

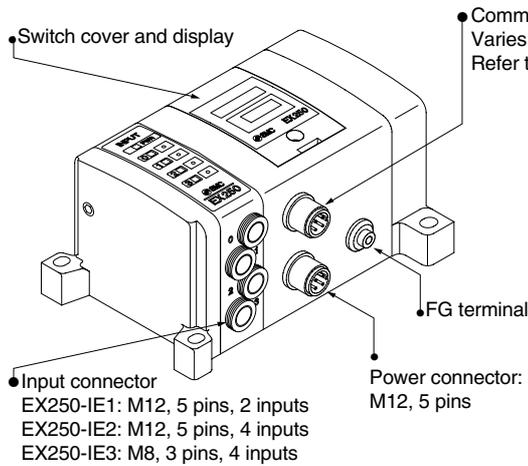

**Communication connector**


**CANopen:** Female connector cable: M12 female 5 pins cable with shield (according to ISO11898).

Pos.	Description	Function
1	CAN_SHLD	Shield
2	CAN_V+	Power supply +
3	CAN_GND	Power supply -
4	CAN_H	Bus line (dominant High)
5	CAN_L	Bus line (dominant Low)




**DeviceNet:** M12...5 pins (Plug) Example for a cable set with plug / socket: OMRON Corporation DCA1-5CN05F1. Karl Lumberg GmbH: 0935 253 103/...M, RSC RKC 57\* ... M. Accessories, bus branch Y: Karl Lumberg GmbH: 0906 UTP 101, Hans Turck GmbH: VB2-FKM-FSM57. Accessories terminating socket with resistor: Hans Turck GmbH: RSE57-TR2, Karl Lumberg GmbH: 0939 CXT 101.

Pos.	Description	Function
1	Drain	Drain / shield
2	V+	Circuit power supply +
3	V-	Circuit power supply -
4	CAN_H	Signal H
5	CAN_L	Signal L



**PROFIBUS-DP:** M12... 5 pins reserve-keyed (Socket). Example for the corresponding cable sets with plug / socket: Hans Turck GmbH: RSSW-RKSW456-...M; Karl Lumberg GmbH: 0975 254 101/...M. Accessories Bus branch Y: Hans Turck GmbH: VB2/FSW/FKW/FSW45. Accessories terminating resistor: Hans Turck GmbH: RSS4.5-PDP-TR; Karl Lumberg GmbH: 0979PTX101


Pos.	Description	Function
1	VP	Power supply for terminating resistor
2	A-N	Negative for data transfer/reception
3	DGND	Ground for terminating resistor
4	B-P	Positive for data transfer/reception
5	SHIELD	Shield



**Power supply**


**DeviceNet:** M12 ... 5 pins reserve-keyed (Plug)  
(The configuration of the connection surface area differs from that of the transmission plug)  
Example of the cable set with socket: Hans Turck GmbH: WAKW4.5T-2, Franz Binder GmbH: 79-4449-...05.

Pos.	Description	Function
1	SV24V	+24 V solenoid valve
2	SV0V	0V solenoid valve
3	SW24V	+24 V SI and input blocks
4	SW0V	0 V SI and input blocks
5	E	Ground connection



**PROFIBUS-DP:** M12...5 pins (Plug)  
Example of the cable set with socket:  
SMC: EX500-AP...S (See page 2-2-25.)

Pos.	Description	Function
1	SV24V	+24 V solenoid valve
2	SV0V	0 V solenoid valve
3	SW24V	+24 V SI and input blocks
4	SW0V	0 V SI and input blocks
5	E	Ground connection





**Circuit diagram Input module (EX250-IE\*)**

Input connection: M12 ... 5 pins (Socket)  
Example for the cable side connection: OMRON Corporation XS2G;  
Karl Lumberg GmbH: Series RST5; Franz Binder GmbH: Series 713,763

Pos.	Description	Function
1	SW+	Sensor power supply +
2	N.C (SIGNAL)	Open*
3	SW-	Sensor power supply -
4	SIGNAL	Sensor input signal
5	E	Sensor ground connection

\* In the 4 input type unit (EX250-IE2), this is the input signal from the second sensor connected.

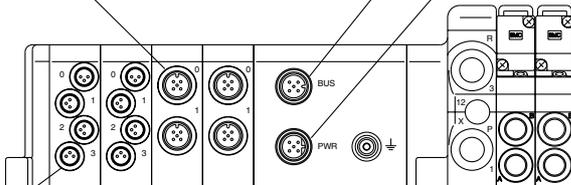


**Input connection: M8 ... 3 pins (Socket)**  
Example for cable side connection: Franz Binder GmbH Series 718, 768  
Karl Lumberg GmbH: Series RSMV3

Pos.	Description	Function
1	SW+	Sensor power supply +
3	SW-	Sensor power supply -
4	SIGNAL	Sensor input signal




**AS-i EX250-SAS7 / EX250-SAS9**

Communication connector: M12 male 4 pins




Pos.	Description	Function
1	AS-i +	Positive AS-Interface line
2	RESERVE	RESERVE
3	AS-i -	Negative AS-Interface line
4	RESERVE	RESERVE

Communication connector



Connection example

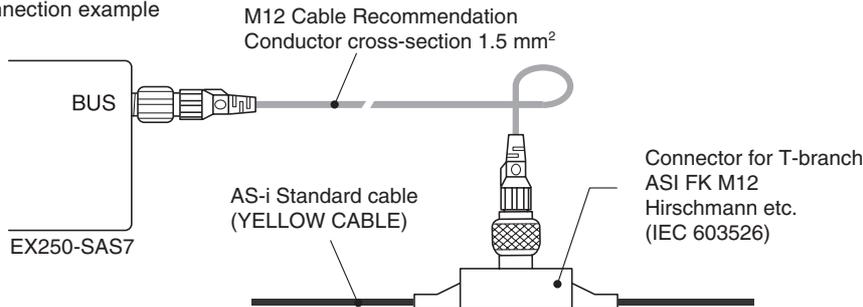

VQC

SQ

VQ0

VQ4


VQ5

VQZ

VQD


**AS-i EX250-SAS3 / EX250-SAS5**

Communication connector: M12 male 4 pins



Pos.	Description	Function
1	AS-i +	Positive AS-Interface line
2	0V	Negative output equipment power line
3	AS-i -	Negative AS-Interface line
4	24V	Positive output equipment power line


Output equipment power connector: M12 male 4 pins




Pos.	Description	Function
1	24V	Positive output equipment power line
2	NC	Not connected
3	0V	Negative output equipment power line
4	NC	Not connected

\* Connected inside the SI unit.

Communication connector

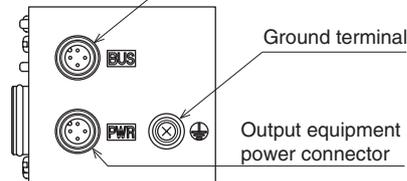

Connection example

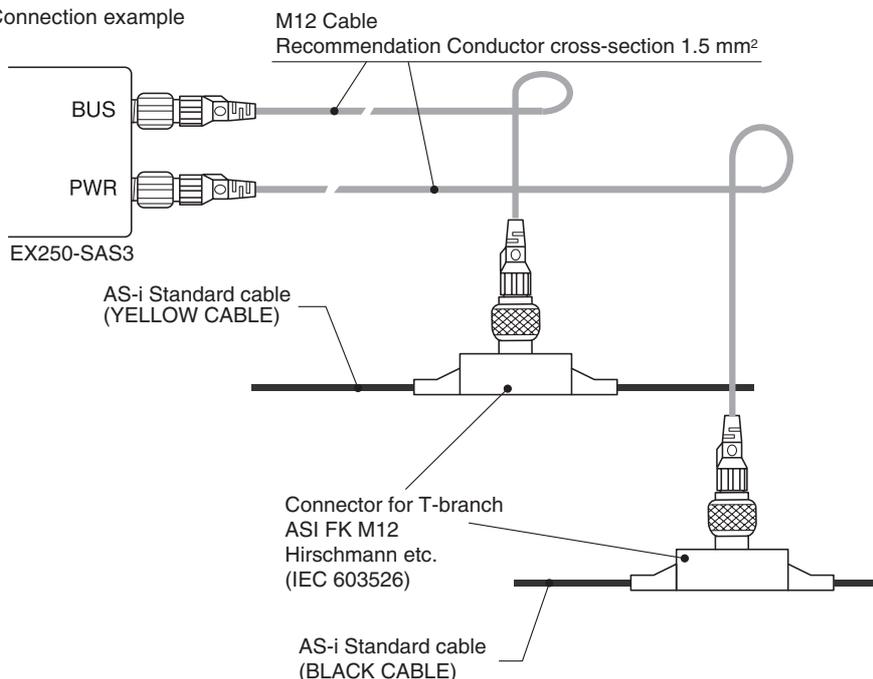


# S VQC1000/2000/4000 Kit (Serial transmission kit) for I/O **IP67 compliant**

## Indicator Unit (LED) Description and Its Function


### SI unit

#### DeviceNet (EX250-SDN1)



Name	Function
PWR(V)	ON when solenoid valve power supply is turned ON.
PWR	ON when DeviceNet circuit power supply input is turned ON.
MOD/NET	OFF: Power supply off, off line, or when checking duplication of MAC_ID.
	GREEN BLINKING: Waiting for connection (on line).
	GREEN ON: Connection established (on line).
	RED BLINKING: Connection time out (minor communication abnormality).
	RED ON: MAC_ID duplication error, or BUSOFF error (major communication abnormality).

### Input block (EX250-IE1/2/3)



2-input type (EX250-IE1)




4-input type (EX250-IE2/3)

Description	Function
PWR	ON when sensor power is turned ON.
0 to 1(3)	ON when each sensor input goes ON.




\* Please contact your SMC representative for specifications and handling precautions.

### PROFIBUS-DP (EX250-SPR1)



Name	Function
PWR(V)	GREEN ON when solenoid valve power supply is turned ON. GREEN OFF when the power supply voltage is less than 19 V.
RUN	GREEN ON when operating (SI unit power supply is ON).
DIA	RED ON when self diagnosis device detects abnormality.
BF	RED ON for BUS abnormality.


### CC-Link (EX250-SMJ2)



Name	Function
PW	ON: Input and control unit power supply ON. OFF: Input and control unit power supply OFF.
PW(V)	ON: Solenoid valve power supply ON. OFF: Solenoid valve power supply voltage is less than 19 V.
L RUN	ON: Normal traffic OFF: Traffic disconnected (Timeover error)
L ERR	ON: Traffic error BLINKING: Station or baud rate switch is set while the power supply is ON. OFF: Normal traffic

When the data link is normal, PW, PW (V) and L RUN are ON.


### AS-i (EX250-SAS□)



Name	LED Condition	Contents
PWR	Green Light	In time of power supply for AS-Interface line is turned on.
AUX	Green Light	In time of auxiliary power supply for output equipment is turned on.
IN-ERR	Red Light	In time of input power is detected over current. (Lights off at normal condition)
COM-ERR	Red Light	In time of communication error. (Lights off at normal condition)
	Red Blink	In time of peripheral equipment error. (Over current of input power, blowing the fuse etc.)


### SI unit

#### CANopen (EX250-SCA1)



Name	LED Condition	Contents
PWR(V)	Green Light	Illuminates when power for solenoid valves is supplied
	Green Light	Illuminates when power for CANopen line is supplied
PWR	Green Light	Illuminates when SI unit is in the Operational state
	Green Light (Blinking)	SI unit is in the Pre-operational state
	Green Light (Single flash)	Single flash when SI unit is in Stopped state
	Red Light (Single flash)	Single flash when CAN controller error occurs
	Red Light (Double flash)	Double flash when Error Control Event occurs
	Green/Red Light (flickering)	Flickering when SI unit is in Configuration mode (LSS services)
	Red Light	Red Light SI unit is in "Bus OFF" state

**VV5QC11**  
**S Kit**  
 (Serial transmission  
 kit: EX250)

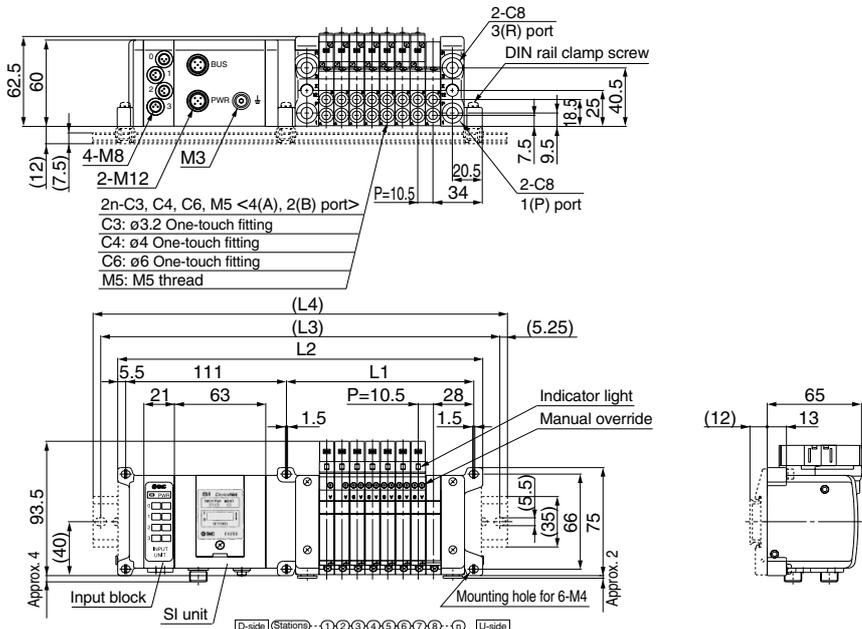

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

Formulas


$L1 = 10.5n + 45$  (Maximum 24 single wiring stations)

\*  $L2$ : For one input block. Add 21 mm for each additional input block.

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L2	178	188.5	199	209.5	220	230.5	241	251.5	262	272.5	283	293.5	304	314.5	325	335.5	346	356.5	367	377.5	388	398.5	409	419.5
L3	200	212.5	225	237.5	250	250	262.5	275	287.5	300	312.5	325	325	337.5	350	362.5	375	387.5	387.5	400	412.5	425	437.5	450
L4	210.5	223	235.5	248	260.5	260.5	273	285.5	298	310.2	323	335.5	335.5	348	360.5	373	385.5	398	398	410.5	423	435.5	448	448

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

**VV5QC21**  
**S Kit**  
 (Serial transmission  
 kit: EX250)

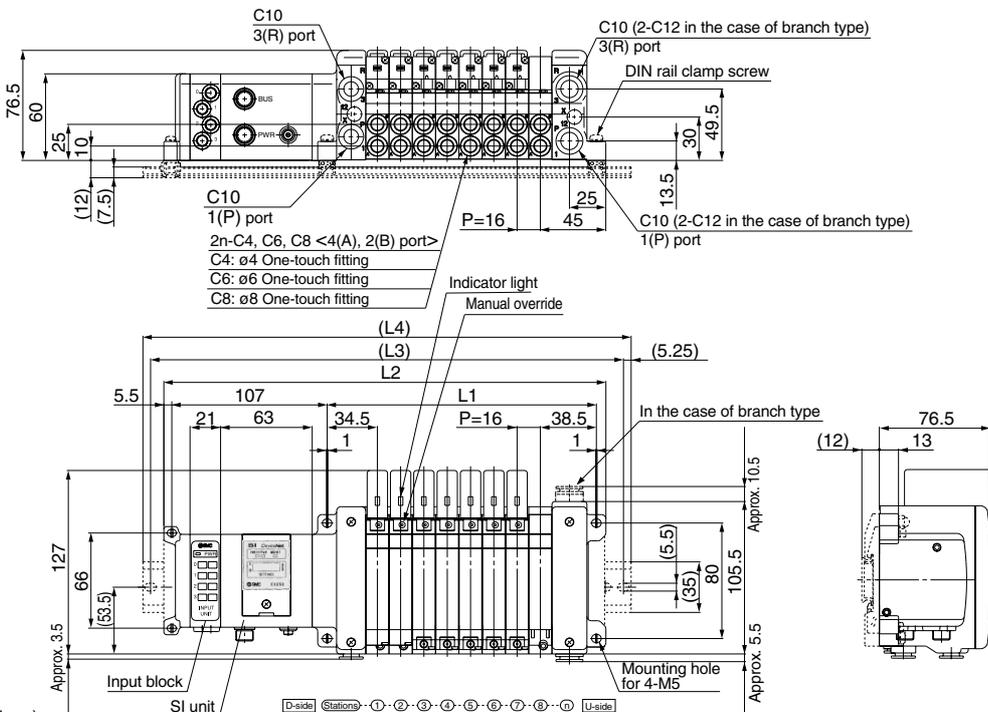

Formulas

$L1 = 16n + 57$  (Maximum 24 single wiring stations)

\*  $L2$ : For one input block. Add 21 mm for each additional input block.



L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313	329	345	361	377	393	409	425	441
L2	192	208	224	240	256	272	288	304	320	336	352	368	384	400	416	432	448	464	480	496	512	528	544	560
L3	212.5	237.5	250	262.5	275	287.5	312.5	325	337.5	362.5	375	387.5	400	425	437.5	450	462.5	487.5	500	512.5	537.5	550	562.5	587.5
L4	223	248	260.5	273	285.5	298	323	335.5	348	373	385.5	398	410.5	435.5	448	460.5	473	498	510.5	523	548	560.5	573	598

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

Series VQC

**S** VQC1000/2000/4000  
Kit (Serial transmission kit) for I/O IP67 compliant

VV5QC41  
S Kit  
(Serial transmission kit: EX250)

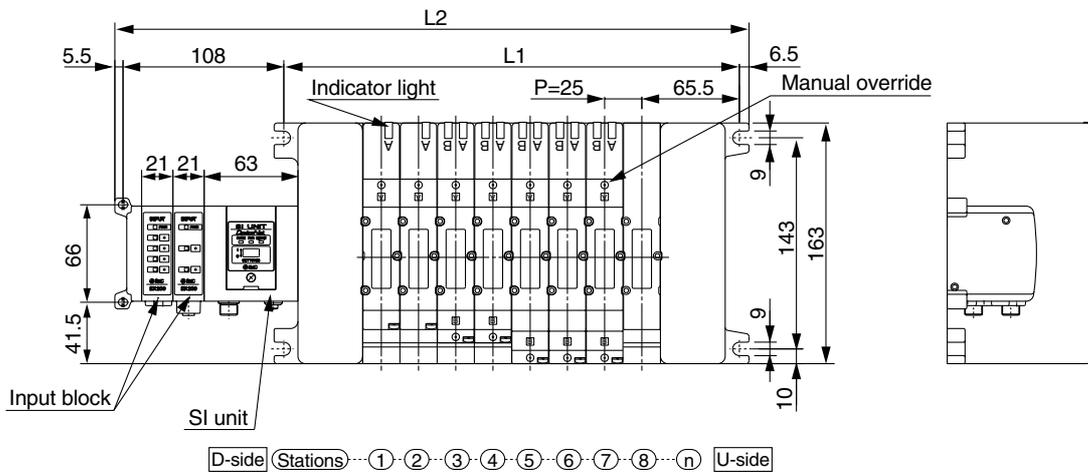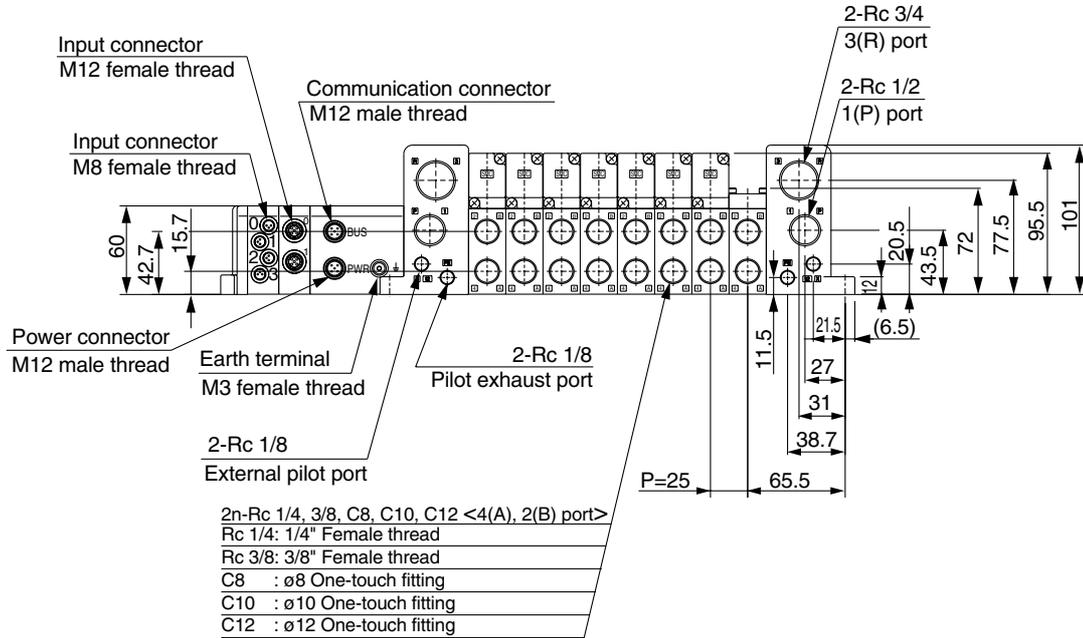

Formulas

$L1 = 25n + 106$  (Maximum 16 single wiring stations)

\*  $L2$ : For one input block. Add 21 mm for each additional input block.


n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	230	255	280	305	330	355	380	405	430	455	480	505	530	555	580	605



Series VQC

**S** VQC4000 Kit (Serial transmission kit) for I/O IP65 compliant

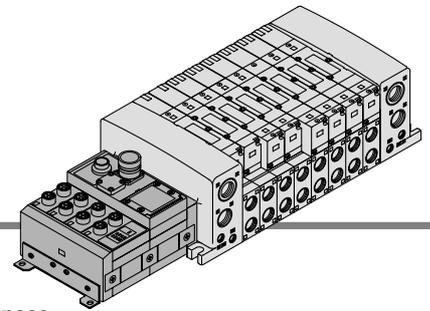

Compatible network **DeviceNet/PROFIBUS-DP**

• The serial transmission system greatly reduces connection work, minimizes wiring, and saves space.

**DeviceNet/PROFIBUS-DP compatible SI unit**

As a DeviceNet/PROFIBUS-DP slave unit, this kit is capable of solenoid valve ON and OFF control up to 32 points.

Furthermore, by connecting an input block, up to 32 sensor signal inputs are possible.


**Input block**

This expansion block connects to the SI unit and allows for sensor input to the auto switches.

Each input block can receive input from up to 8 sensors, and the common can be matched to the sensor by an NPN/PNP selector switch.


**Connector Details**

**Input block**



Input connector

**SI unit (DeviceNet)**



Communication connector

Power connector

**SI unit (PROFIBUS-DP)**



• **Communication connector (PROFIBUS-DP):**

**CONINVERS GmbH RC-2RS1N12, 12 pins**

Cable side connector example: Siemens AG 6ES5 760-2CB11


No.	Description	Function
1	M5V	GND Terminal
2	A	Signal -N
4	B	Signal -P
6	+5V	Terminal +5V
9	SHIELD	Shield ground
12	RTS	Optical fiber (reserve)

• Pin no. 3, 5, 7, 8, 10 and 11 marked with "●" are open.

\* The connector configuration and the pin arrangement are compatible with Siemens AG ET200C.


• **Input connector: M12, 5 pins (OMRON Corporation XS2F compatible) x 8 pcs.**

Cable side connector example: OMRON Corporation XS2G



No.	Description	Function
1	SW +	(+) Sensor power supply
2	N.C.	Open*
3	SW -	(-) Sensor power supply
4	SIGNAL	Sensor input signal
5	PE	Protective sensor ground


\* The second pin of the connector with input no. 0, 2, 4, 6 (the connector at the right side of the input block) is connected internally to the fourth pin (sensor input no.) of the connector with input no. 1, 3, 5, 7. This makes it possible to directly input two inputs that are combined together by the common connector.

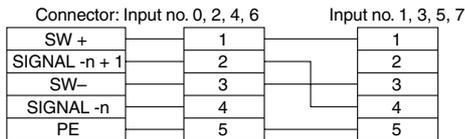

• **Power connector: Franz Binder GmbH Series 723, 5 pins (72309-0115-80-05)**

Cable side connector example: Franz Binder GmbH 72309-0114-70-15, etc.

\* DIN type 5 pins




No.	Description	Function
1	SV24V	For solenoid valve +24V
2	SV0V	For solenoid valve +0V
3	PE	Protective ground
4	SW24V	For solenoid valve +24V
5	SW0V	For solenoid valve +0V

• **Communication connector (DeviceNet): M12, 5 pins (for DeviceNet only)**

Example of corresponding cable assemblies with connector:

OMRON Corporation DCA1-5CN05F1, Karl Lumberg GmbH & Co. KG RKT5-56.



No.	Description	Function
1	Drain	Drain/Shield
2	V +	(+) Circuit power supply
3	V -	(-) Circuit power supply
4	CAN_H	Signal H
5	CAN_L	Signal L

Compatible with DeviceNet specification Micro Style connector.


**Caution**

When IP65 or equivalent enclosures are required, install a waterproof cover on the input connector that is not being used. Order waterproof covers separately.


Example: OMRON Corporation XS2Z-12

**Indicator Unit (LED) Description and Its Function**

■ **SI unit (DeviceNet)**



■ **SI unit (PROFIBUS-DP)**



■ **Input block**




Description	Function
PWR(V)	ON when solenoid valve power supply is turned ON.
PWR	ON when DeviceNet circuit power supply input is turned ON.
MOD/NET	OFF: Power supply off, off line, or when checking duplication of MAC_ID.
	GREEN BLINKING: Waiting for connection (on line).
	GREEN ON: Connection established (on line).
	RED BLINKING: Connection time out (minor communication abnormality).
	RED ON: MAC_ID duplication error, or BUSOFF error (major communication abnormality).

Description	Function
PWR(V)	ON when solenoid valve power supply is turned ON. OFF when the power supply voltage is less than 19V.
RUN	ON when operating (SI unit power supply is ON).
DIA	ON when self diagnosis device detects abnormality.
BF	ON for BUS abnormality.

Description	Function
PWR	ON when sensor power is turned ON. OFF when short circuit protection is working.
0 to 7	ON when each sensor input goes ON.



**S** VQC1000/2000/4000  
Kit (Serial transmission kit) for I/O IP67 compliant

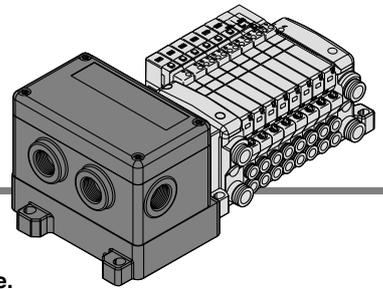


Compatible network **CC-Link**

- The serial transmission system greatly reduces connection work, minimizes wiring, and saves space.


**Terminal Block Connection**

**Step 1. How to remove terminal block cover**

Loosen the 4 mounting screws (M4) and remove the terminal block cover.

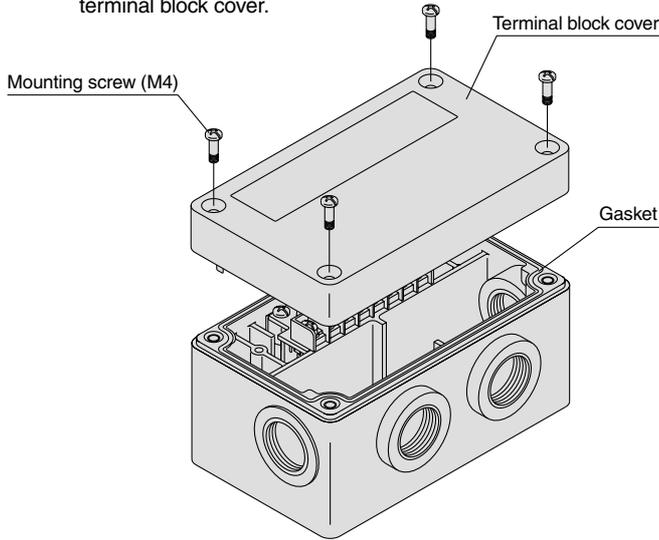

**Step 2. Wire the cables according to the terminal block specifications below. Pay attention to the wire bound positions.**

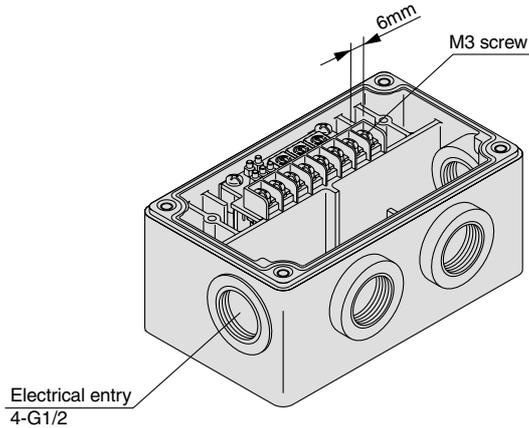

**Step 3. How to replace the terminal block cover**

Securely tighten the screws to the torque shown in the table below, after confirming that the gasket is installed correctly.


Proper tightening torque (N·m)
0.7 to 1.2

- Applicable crimp terminal (fork tongue type): 1.25-3S, 1.25Y-3, 1.25Y-3N, 1.25Y-3.5

\* For detailed specifications and handling, refer to the operation manual provided by SMC.


**Terminal Block Details**

• Terminal block LED descriptions



Description	Function
<b>PW</b>	ON when transmission power supply is ON. OFF when transmission power supply is OFF.
<b>L RUN</b>	ON when normal data is received.
<b>SD</b>	ON when data is sent.
<b>RD</b>	ON when data is received.
<b>L ERR.</b>	ON for transmission error and incorrect settings. BLINKING for change in station or transmission speed settings.

• Cable wiring

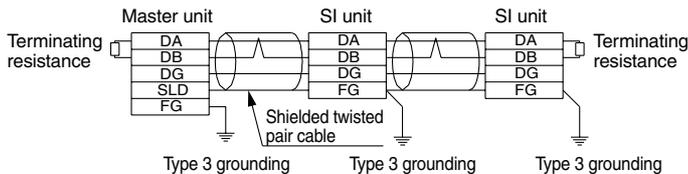


• Note

- CC-LINK System
  - Master unit: AJ61BT11
  - Master unit: A1SJ61BT11
  - Master unit: AJ61QBT11
  - Master unit: A1SJ61QBT11

- 16 outputs

VV5QC11  
S Kit (Serial transmission kit: EX126)

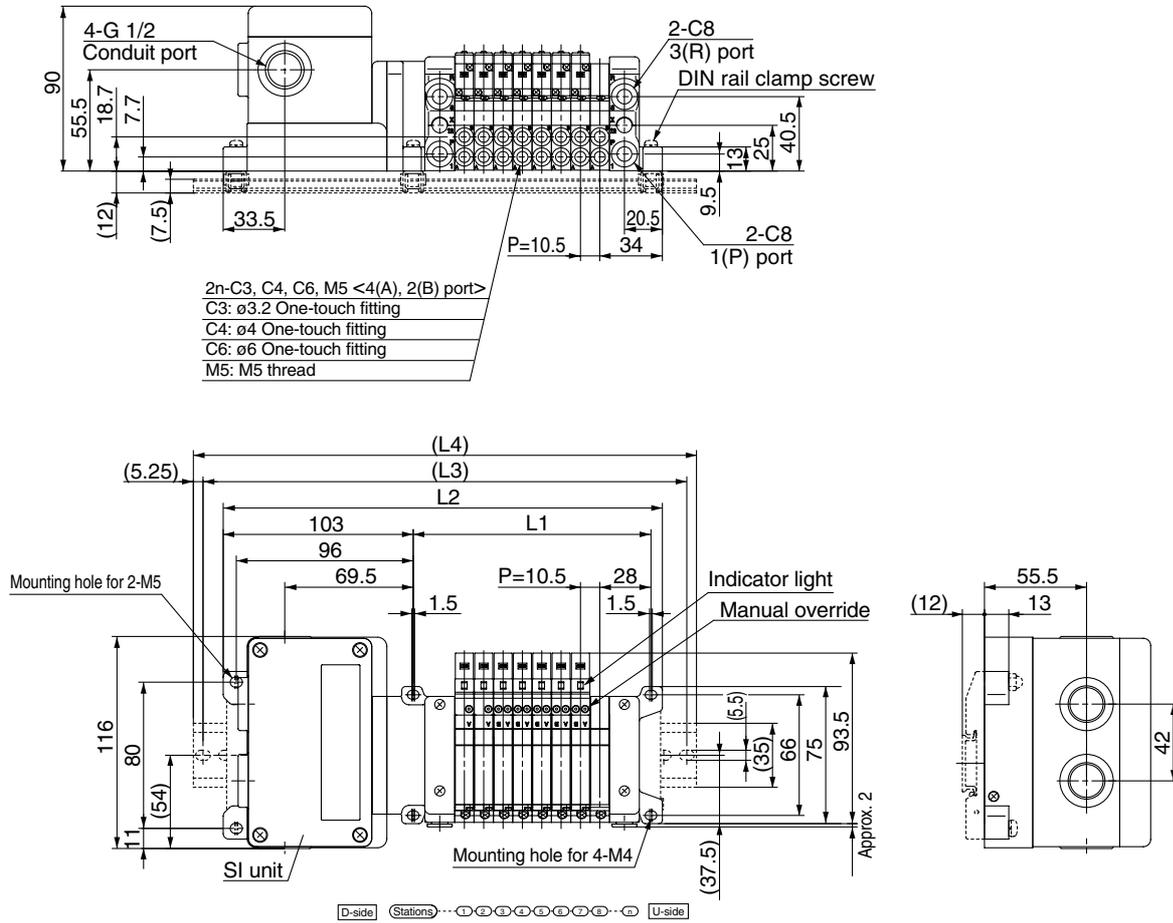

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

Formulas  
L1 = 10.5n + 45 (Maximum 16 single wiring stations)  
L2 = 10.5n + 154.5


n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213
L2	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5
L3	187.5	200	212.5	212.5	225	237.5	250	262.5	275	275	287.5	300	312.5	325	337.5	337.5
L4	198	210.5	223	223	235.5	248	260.5	273	285.5	285.5	298	310.5	323	335.5	348	348


\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.



VV5QC41  
S Kit (Serial transmission kit: EX126)

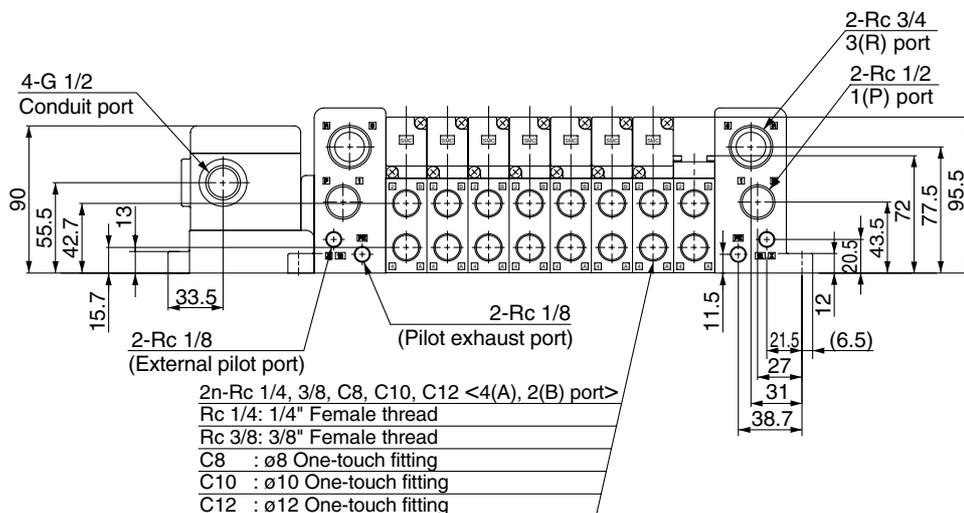

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

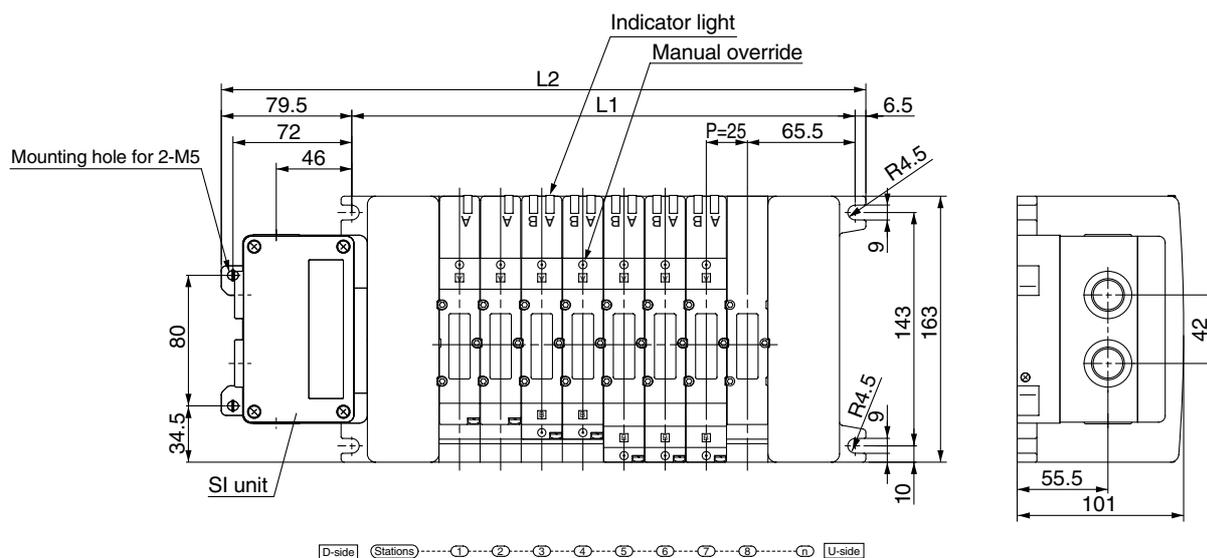


Formulas  
L1 = 25n + 106 (Maximum 16 single wiring stations)  
L2 = 25n + 192

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	217	242	267	292	317	342	367	392	417	442	467	492	517	542	567	592

Series VQC

**F** VQC1000/2000/4000  
Kit (D-sub connector kit) IP40 compliant

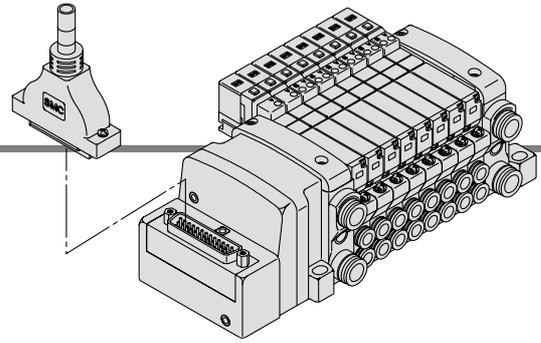

- Using our D-sub connector for electrical connections greatly reduces labour, while it also minimizes wiring and saves space.
- We use a D-sub connector (25P) that conforms to MIL standards and is therefore widely compatible with many standard commercial models.
- Top or side entry for the connector can be changed freely, allowing for changes even after mounting, to meet any changing needs for space.

Electrical Wiring Specifications

**D-sub connector**

As the standard electrical wiring specification used is for 12 stations or less, double wiring (connected to SOL. A and SOL. B) is used for the internal wiring of each station regardless of valve and option types. Mixed single and double wiring are available as options. Refer to special wiring specifications (options) below.

Terminal no.	Polarity	Station	SOL. A	SOL. B
1	(-)	1	SOL. A	SOL. B
2	(-)	2	SOL. A	SOL. B
3	(-)	3	SOL. A	SOL. B
4	(-)	4	SOL. A	SOL. B
5	(-)	5	SOL. A	SOL. B
6	(-)	6	SOL. A	SOL. B
7	(-)	7	SOL. A	SOL. B
8	(-)	8	SOL. A	SOL. B
9	(-)	9	SOL. A	SOL. B
10	(-)	10	SOL. A	SOL. B
11	(-)	11	SOL. A	SOL. B
12	(-)	12	SOL. A	SOL. B
13	(+)		COM	

**Lead wire colours according to pin numbers**  
The colour code is according to DIN47100.

Pin no.	Cable colour	Identification
1	white	—
2	brown	—
3	green	—
4	yellow	—
5	grey	—
6	pink	—
7	blue	—
8	red	—
9	black	—
10	violet	—
11	grey	pink
12	red	blue
13	white	green
14	brown	green
15	white	yellow
16	yellow	brown
17	white	grey
18	grey	brown
19	white	pink
20	pink	brown
21	white	blue
22	brown	blue
23	white	red
24	brown	red
25	white	black

Note) When using the negative COM specification for VQC1000/2000, use valves for negative COM.

Special Wiring Specifications (Option)

(For 25P)

Mixed single and double wiring are available as options. The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. The total number of solenoids (points) must not exceed 24.

Cable Assembly

■ D-sub connector cable assembly (25 pins)


GVVZS3000-21A-□

D-sub connector/cable

Cable length (L)	Part no.	Plug type
1 m	GVVZS3000-21A-160	60° outlet
3 m	GVVZS3000-21A-260	60° outlet
5 m	GVVZS3000-21A-360	60° outlet
8 m	GVVZS3000-21A-460	60° outlet
3 m	GVVZS3000-21A-2	Standard
5 m	GVVZS3000-21A-3	Standard
8 m	GVVZS3000-21A-4	Standard

Shielded cable

Cable length (L)	Part no.	Cable type
1 m	GVVZS3000-21A-1S	shielded
3 m	GVVZS3000-21A-2S	shielded
5 m	GVVZS3000-21A-3S	shielded
8 m	GVVZS3000-21A-4S	shielded
20 m	GVVZS3000-21A-5S	on demand

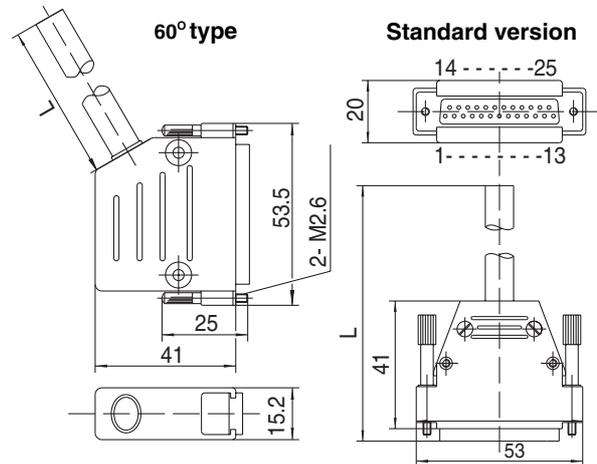

Electrical characteristics




Item	Characteristics
Conductor resistance $\Omega/\text{km}$ , 20°C	57 or less
Electric strength V, 5min, AC	1500
Insulation resistance $\text{M}\Omega/\text{km}$	20

Standard version

(See also AXT100-DS25-015  
030  
050  
which conforms to colour code MIL-C24308)

\* For detailed specifications and handling, please contact SMC.

VV5QC11

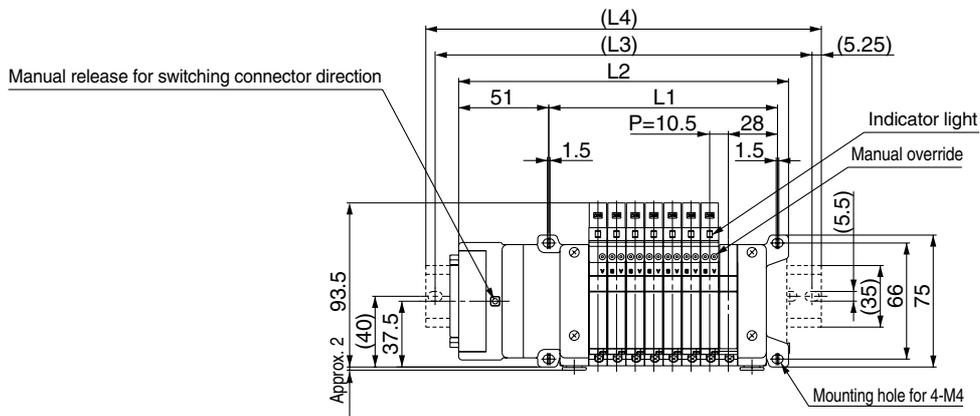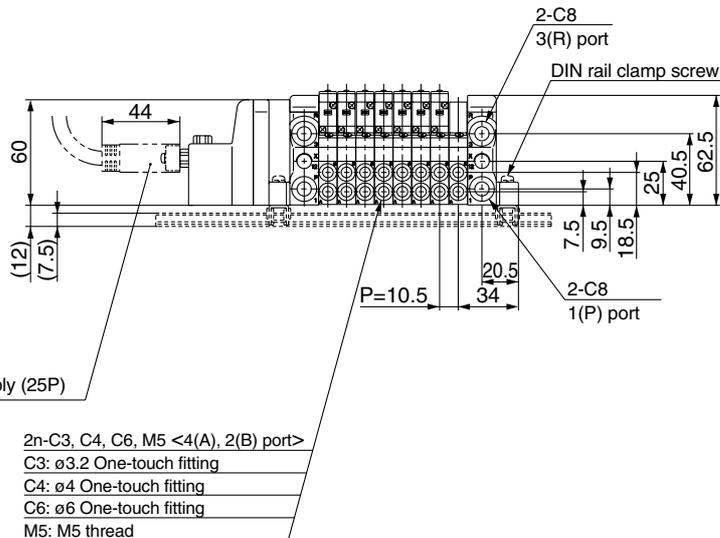

D-side Stations ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ U-side

Formulas

$L1 = 10.5n + 45$  (Maximum 24 single wiring stations)

$L2 = 10.5n + 102$

n: Stations



L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L2	112.5	123	133.5	144	154.5	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5	333	343.5	354
L3	137.5	150	162.5	175	187.5	200	212.5	225	237.5	250	262.5	275	287.5	300	300	312.5	325	337.5	350	362.5	375	375		
L4	148	160.5	173	185.5	198	210.5	223	235.5	248	260.5	273	285.5	298	310.5	310.5	323	335.5	348	360.5	373	385.5	385.5		

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

**F** VQC1000/2000/4000  
Kit (D-sub connector) IP40 compliant

VV5QC21

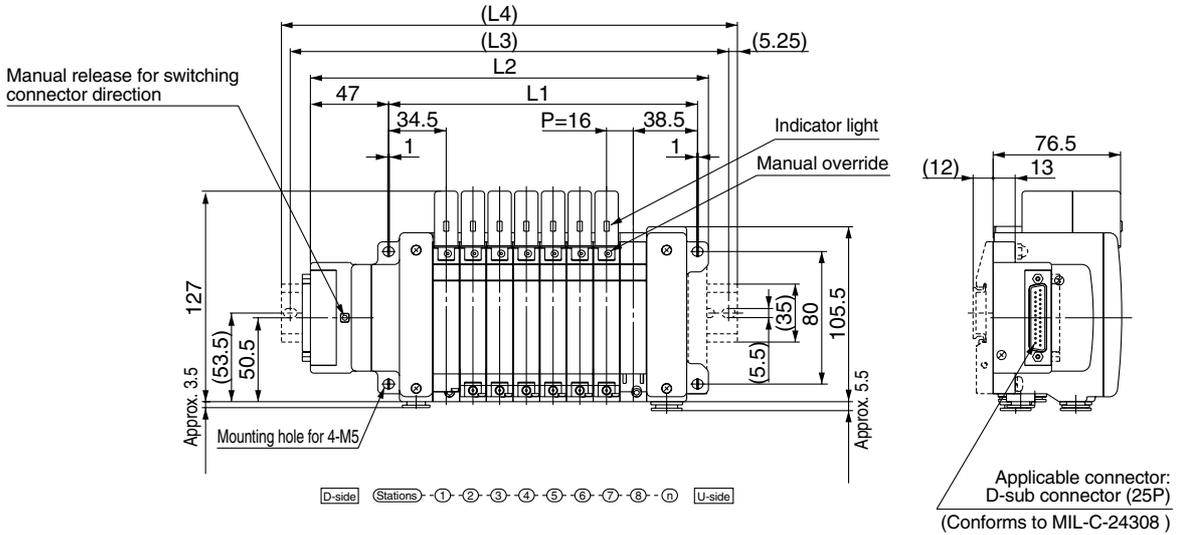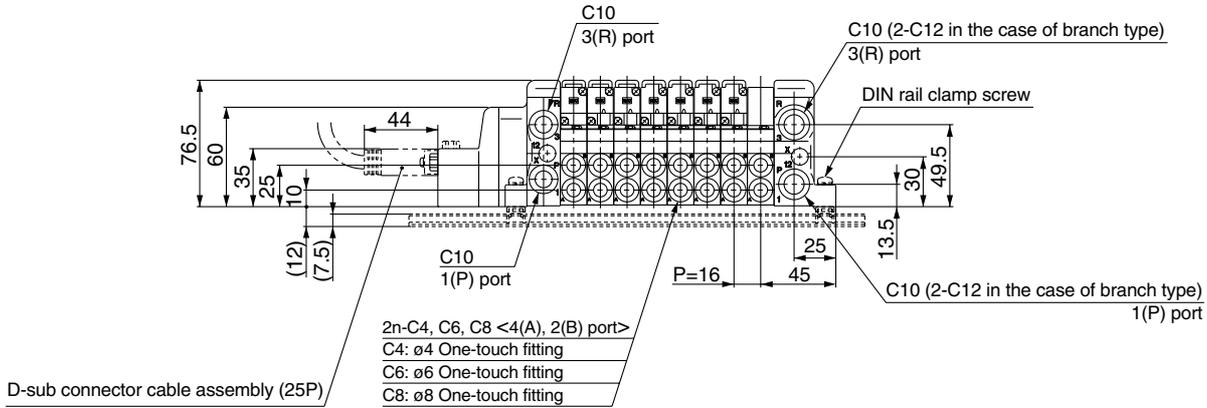


Formulas  
 $L1 = 16n + 57$  (Maximum 24 single wiring stations)  
 $L2 = 16n + 110.5$


L	n: Stations																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313	329	345	361	377	393	409	425	441
L2	126.5	142.5	158.5	174.5	190.5	206.5	222.5	238.5	254.5	270.5	286.5	302.5	318.5	334.5	350.5	366.5	382.5	398.5	414.5	430.5	446.5	462.5	478.5	494.5
L3	150	162.5	187.5	200	212.5	237.5	250	262.5	275	300	312.5	325	350	362.5	375	387.5	412.5	425	437.5	450	475	487.5	500	525
L4	160.5	173	198	210.5	223	248	260.5	273	285.5	310.5	323	335.5	360.5	373	385.5	398	423	435.5	448	460.5	485.5	498	510.5	535.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

VV5QC41

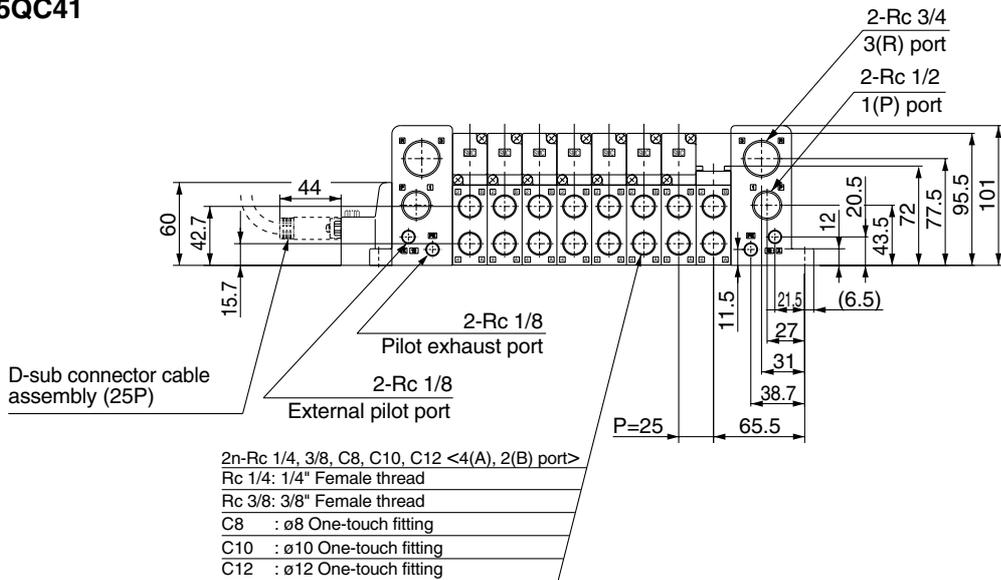

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

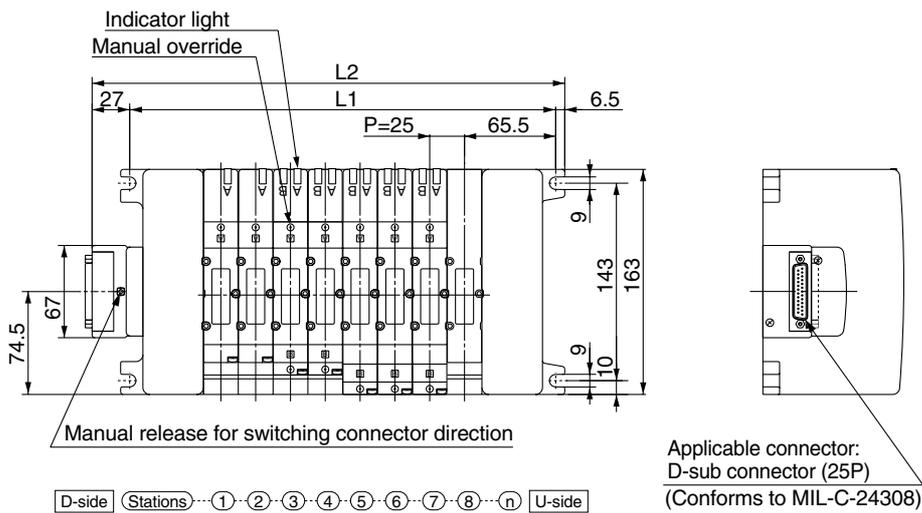

Formulas  
 $L1 = 25n + 106$  (Maximum 16 single wiring stations)  
 $L2 = 25n + 139.5$


n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	164.5	189.5	214.5	239.5	264.5	289.5	314.5	339.5	364.5	389.5	414.5	439.5	464.5	489.5	514.5	539.5

Series VQC

**P** VQC1000/2000/4000  
Kit (Flat ribbon cable kit) IP40 compliant

- Using our flat ribbon cable for electrical connections greatly reduces labour, while it also minimizes wiring and saves space.
- We use flat ribbon cables whose connectors (26P and 20P) conform to MIL standards, and are therefore widely compatible with many standard commercial models.
- Top or side entry for the connector can be changed freely, allowing for changes even after mounting, to meet any changing needs for space.

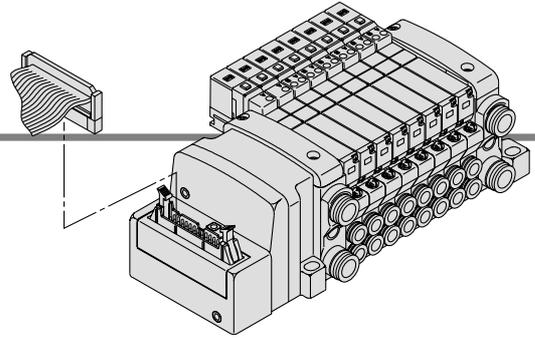

Electrical Wiring Specifications

**Flat ribbon cable connector**

Double wiring (connected to SOL. A and SOL. B) is used for the internal wiring of each station regardless of valve and option types. Mixed single and double wiring are available as options. Refer to special wiring specifications (options) below.

Connector terminal number

Triangle mark indicator position

<26P>			<20P>		
Station	Terminal no.	Polarity	Station	Terminal no.	Polarity
Station 1	SOL. A 1	(-) (+)	Station 1	SOL. A 1	(-) (+)
	SOL. B 2	(-) (+)		SOL. B 2	(-) (+)
Station 2	SOL. A 3	(-) (+)	Station 2	SOL. A 3	(-) (+)
	SOL. B 4	(-) (+)		SOL. B 4	(-) (+)
Station 3	SOL. A 5	(-) (+)	Station 3	SOL. A 5	(-) (+)
	SOL. B 6	(-) (+)		SOL. B 6	(-) (+)
Station 4	SOL. A 7	(-) (+)	Station 4	SOL. A 7	(-) (+)
	SOL. B 8	(-) (+)		SOL. B 8	(-) (+)
Station 5	SOL. A 9	(-) (+)	Station 5	SOL. A 9	(-) (+)
	SOL. B 10	(-) (+)		SOL. B 10	(-) (+)
Station 6	SOL. A 11	(-) (+)	Station 6	SOL. A 11	(-) (+)
	SOL. B 12	(-) (+)		SOL. B 12	(-) (+)
Station 7	SOL. A 13	(-) (+)	Station 7	SOL. A 13	(-) (+)
	SOL. B 14	(-) (+)		SOL. B 14	(-) (+)
Station 8	SOL. A 15	(-) (+)	Station 8	SOL. A 15	(-) (+)
	SOL. B 16	(-) (+)		SOL. B 16	(-) (+)
Station 9	SOL. A 17	(-) (+)	Station 9	SOL. A 17	(-) (+)
	SOL. B 18	(-) (+)		SOL. B 18	(-) (+)
Station 10	SOL. A 19	(-) (+)	Station 10	COM 19	(+) (-)
	SOL. B 20	(-) (+)		COM 20	(+) (-)
Station 11	SOL. A 21	(-) (+)			
	SOL. B 22	(-) (+)			
Station 12	SOL. A 23	(-) (+)			
	SOL. B 24	(-) (+)			
	COM 25	(+) (-)			
	COM 26	(+) (-)			

Positive COM. spec. Negative COM. spec.

Note) When using the negative COM. specification for VQC1000/2000, use valves for negative COM.

Cable Assembly

AXT100-FC<sup>1</sup><sub>26-2</sub><sup>3</sup>

(Type 26P flat ribbon cable connector assemblies can be ordered with manifolds. Refer to manifold ordering.)

Terminal no. Red 28AWG

30 (20P) 37.5 (26P) 6 (15.6) L

**Flat ribbon cable connector assemblies (Option)**

Cable length (L)	Part no.	
	26P	20P
1.5 m	AXT100-FC26-1	AXT100-FC20-1
3 m	AXT100-FC26-2	AXT100-FC20-2
5 m	AXT100-FC26-3	AXT100-FC20-3

\* When using a standard commercial connector, use a type 26P connector conforming to MIL-C-83503 or a type 20P with strain relief.  
\* Cannot be used for transfer wiring.

**Connector Manufacturers Example:**

- Hirose Electric CO., Ltd.
- Sumitomo/3-M Limited
- Fujitsu, Ltd.
- Japan Aviation Electronics Industry, Ltd.
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.




Special Wiring Specifications (Option)

COM. COM. COM. COM.

(For 26P) (For 20P)

Mixed single and double wiring are available as options. The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. The total number of solenoids (points) must not exceed 24.

VV5QC11

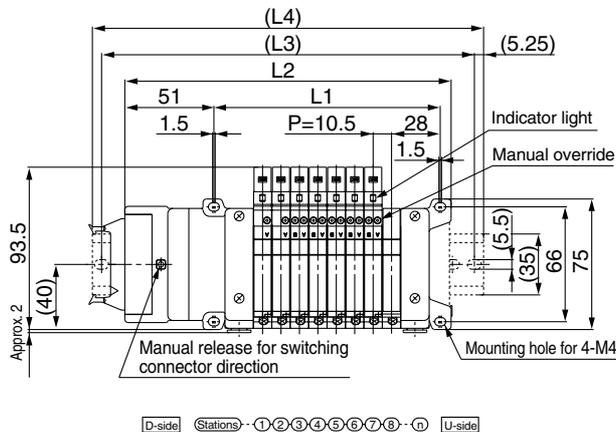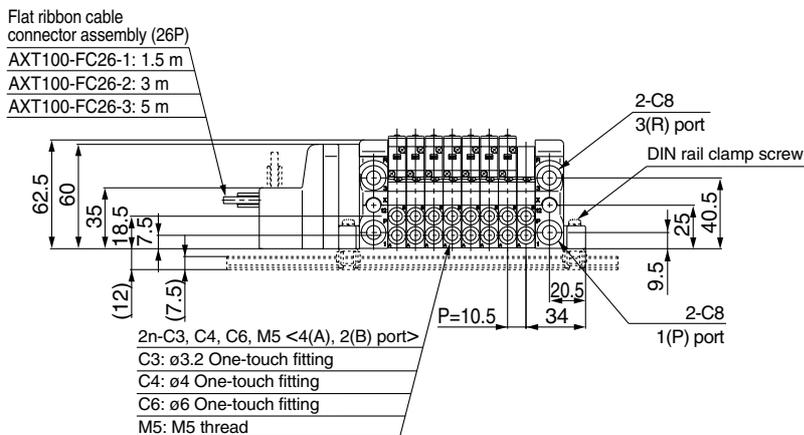

Applicable connector:  
Flat ribbon cable connector (26P)  
(Conforms to MIL-C-83503)

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

Formulas  
 $L1 = 10.5n + 45$  (Maximum 24 single wiring stations)  
 $L2 = 10.5n + 102$  n: Stations



L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L2	112.5	123	133.5	144	154.5	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5	333	343.5	354
L3	137.5	150	162.5	175	187.5	200	212.5	225	237.5	250	262.5	275	287.5	300	300	312.5	325	337.5	350	362.5	375	375		
L4	148	160.5	173	185.5	198	210.5	223	235.5	248	260.5	273	285.5	298	310.5	310.5	323	335.5	348	360.5	373	385.5	385.5		

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.



VV5QC41

Flat ribbon cable  
connector assembly (26P)  
AXT100-FC26-1: 1.5 m  
AXT100-FC26-2: 3 m  
AXT100-FC26-3: 5 m

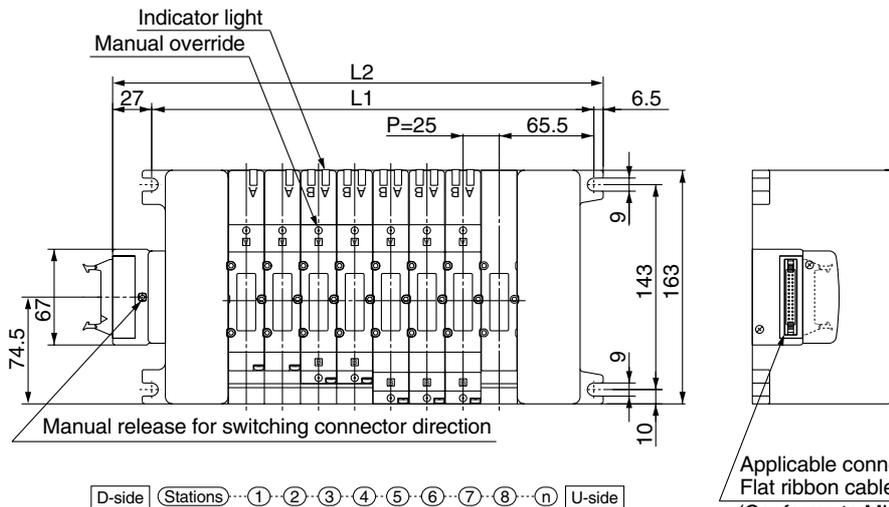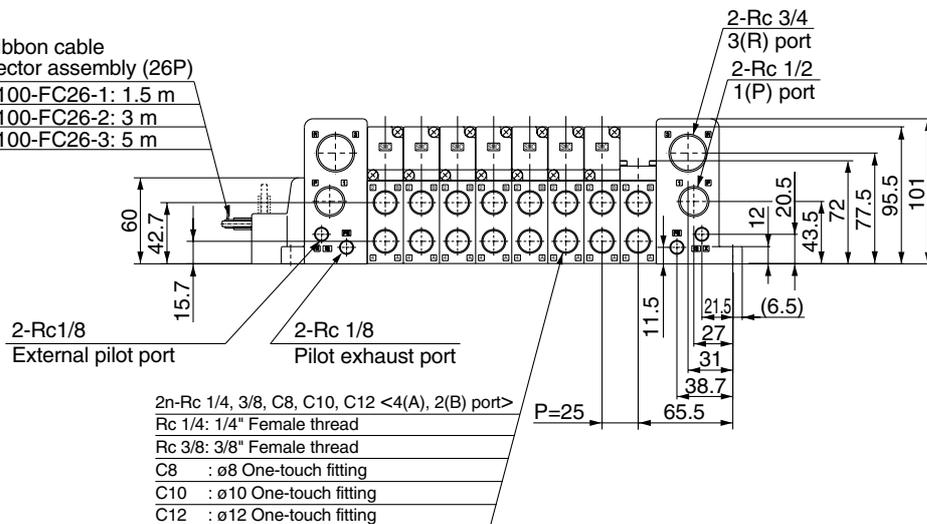

Formulas

$L1 = 25n + 106$  (Maximum 16 single wiring stations)

$L2 = 25n + 139.5$

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	164.5	189.5	214.5	239.5	264.5	289.5	314.5	339.5	364.5	389.5	414.5	439.5	464.5	489.5	514.5	539.5

VQC

SQ

VQ0


VQ4

VQ5

VQZ

VQD

**T** VQC1000/2000/4000  
Kit (Terminal block box kit) IP67 compliant

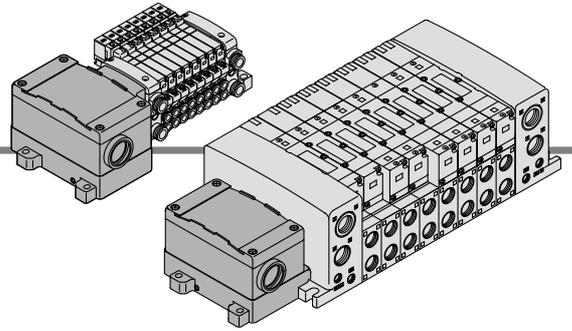


• This kit has a small terminal block inside a junction box. The provision of a G 3/4 electrical entry allows connection of conduit fittings.

**Terminal Block Connection**

**Step 1. How to remove terminal block cover**

Loosen the 4 mounting screws (M4) and remove the terminal block cover.

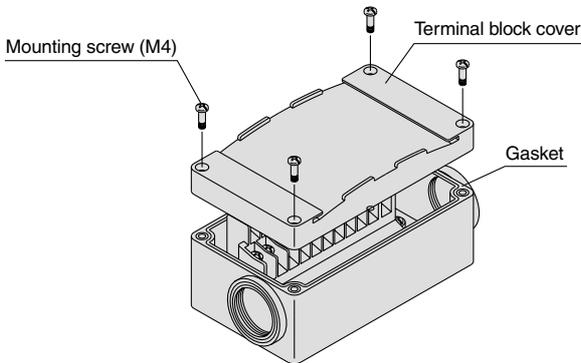

**Step 3. How to replace the terminal block cover**


Securely tighten the screws to the torque shown in the table below, after confirming that the gasket is installed correctly.

Proper tightening torque (N·m)
0.7 to 1.2

**Step 2. The diagram below shows the terminal block wiring.**

**All stations are provided with double wiring regardless of the valves which are mounted.**

Connect each wire to the power supply side, according to the markings provided inside the terminal block.

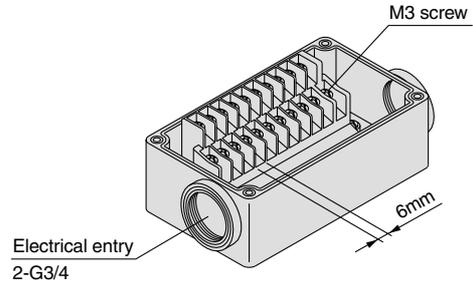

- Applicable crimp terminal (fork tongue type): 1.25-3S, 1.25Y-3, 1.25Y-3N, 1.25Y-3.5

**Electrical Wiring Specifications (Conforms to IP67)**

	Terminal no.	Polarity
Station 1	SOL. A 1A	(-) (+)
	SOL. B 1B	(-) (+)
Station 2	SOL. A 2A	(-) (+)
	SOL. B 2B	(-) (+)
Station 3	SOL. A 3A	(-) (+)
	SOL. B 3B	(-) (+)
Station 4	SOL. A 4A	(-) (+)
	SOL. B 4B	(-) (+)
Station 5	SOL. A 5A	(-) (+)
	SOL. B 5B	(-) (+)
Station 6	SOL. A 6A	(-) (+)
	SOL. B 6B	(-) (+)
Station 7	SOL. A 7A	(-) (+)
	SOL. B 7B	(-) (+)
Station 8	SOL. A 8A	(-) (+)
	SOL. B 8B	(-) (+)
Station 9	SOL. A 9A	(-) (+)
	SOL. B 9B	(-) (+)
Station 10	SOL. A 10A	(-) (+)
	SOL. B 10B	(-) (+)
	COM.	(+) (-)

The internal wiring is double (connected to SOL. A and SOL. B) for all stations regardless of the type of valve or options. Mixed single and double wiring are available as options.

Note) When using the negative COM. specification for VQC1000/2000, use valves for negative COM.

**Special Wiring Specifications (Option)**


Mixed single and double wiring are available as options. The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. The total number of solenoids (points) must not exceed 20.

**1. How to order**



Indicate option symbol "-K" in the manifold part number and be sure to specify station positions for single or double wiring on the manifold specification sheet.

**2. Wiring specifications**

Connector terminal numbers are connected from solenoid station 1 on the A side in the order indicated by the arrows without skipping any terminal numbers.



VV5QC11

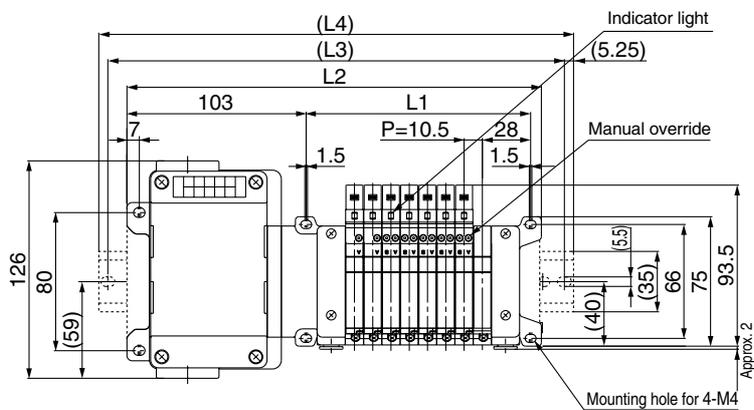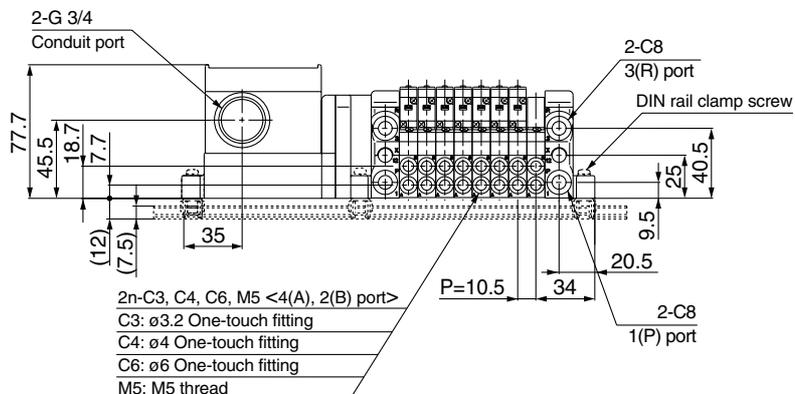

D-side Stations 1 2 3 4 5 6 7 8 n U-side

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

Formulas

$L1 = 10.5n + 45$  (Maximum 20 single wiring stations)

$L2 = 10.5n + 154.5$



n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255
L2	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5	333	343.5	354	364.5
L3	187.5	200	212.5	212.5	225	237.5	250	262.5	275	275	287.5	300	312.5	325	337.5	337.5	350	362.5	375	387.5
L4	198	210.5	223	223	235.5	248	260.5	273	285.5	285.5	298	310.5	323	335.5	348	348	360.5	373	385.5	398

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

**T** VQC1000/2000/4000  
Kit (Terminal block box kit) IP67 compliant

VV5QC21

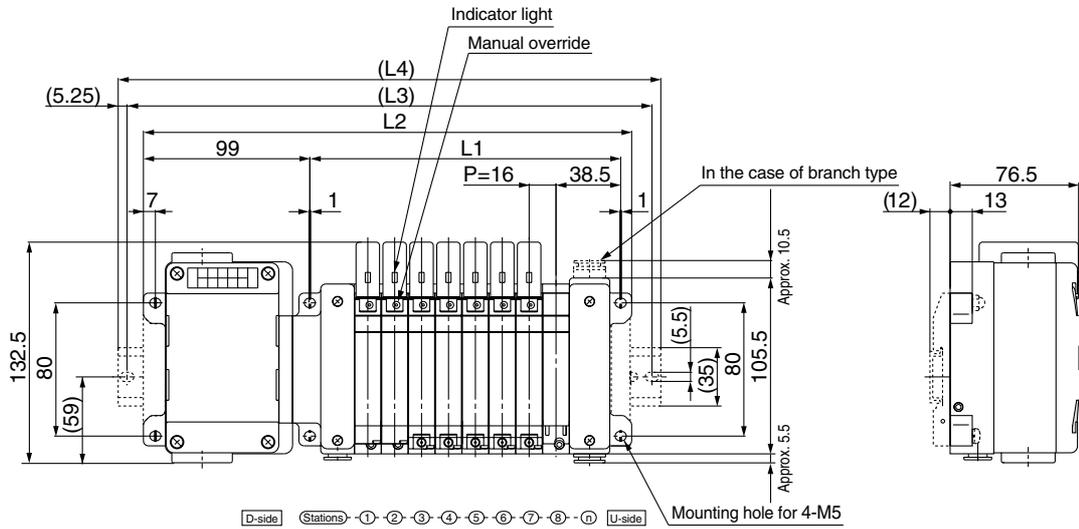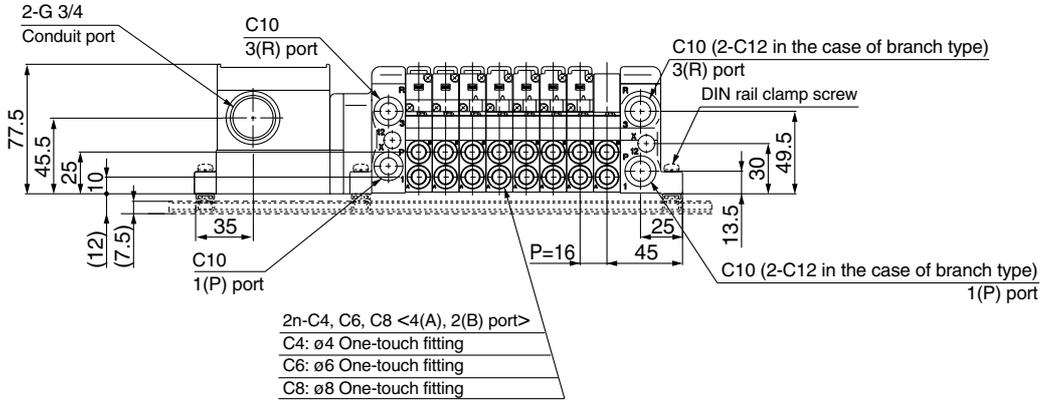

Formulas

$L1 = 16n + 57$  (Maximum 20 single wiring stations)


$L2 = 16n + 163$

n: Stations


L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313	329	345	361	377
L2	179	195	211	227	243	259	275	291	307	323	339	355	371	387	403	419	435	451	467	483
L3	200	212.5	237.5	237.5	262.5	262.5	287.5	312.5	325	371	362.5	375	408.5	412.5	425	437.5	462.5	496	487.5	500
L4	210.5	223	248	248	273	273	298	323	335.5	360.5	373	385.5	398	423	435.5	448	473	485.5	498	510.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

VV5QC41

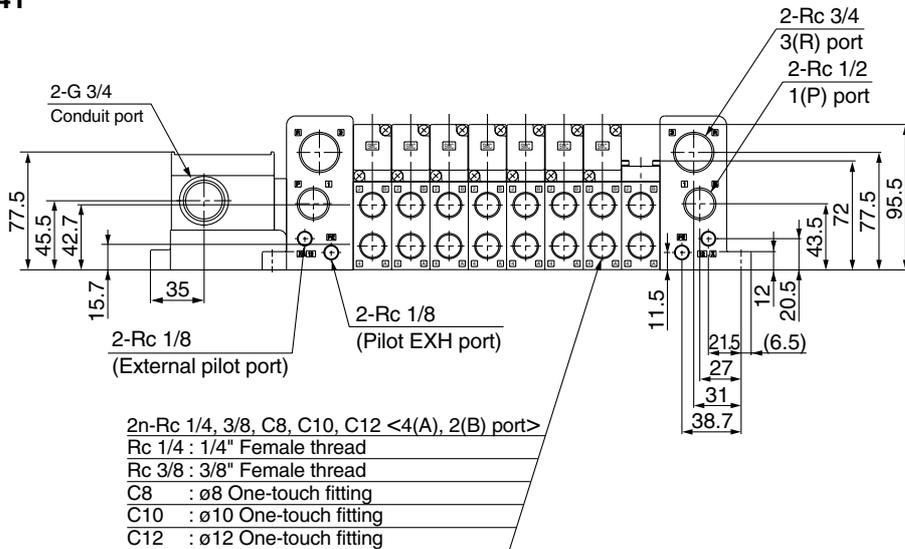

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

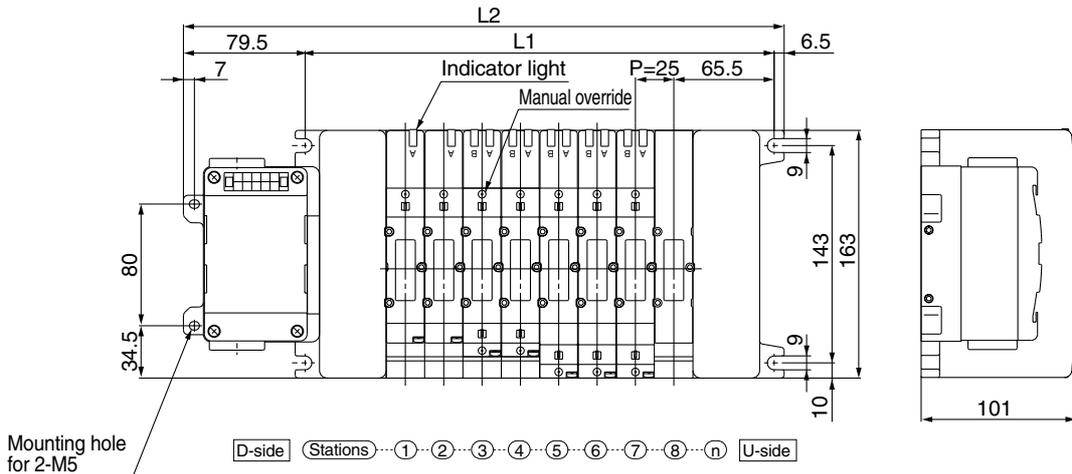


Formulas  
 $L1 = 25n + 106$  (Maximum 16 single wiring stations)  
 $L2 = 25n + 192$

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	217	242	267	292	317	342	367	392	417	442	467	492	517	542	567	592

Series VQC

**L** VQC1000/2000/4000  
Kit (Lead wire kit) IP67 compliant

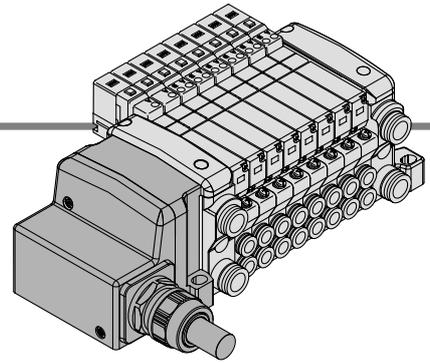


- Direct electrical entry type.
- IP67 enclosure is available with use of cables with sheath and waterproof connectors.

Electrical Wiring Specifications

Lead wire specifications

Lead wire  
0.3 mm<sup>2</sup> × 25 core



Sheath  
Colour: Urban white

As the standard electrical wiring specification used is for 12 stations or less, double wiring (connected to SOL. A and SOL. B) is used for the internal wiring of each station regardless of valve and option types. Mixed single and double wiring are available as options. Refer to special wiring specifications (options) below.

Lead wire length

VV5QC11-08 C6 LD 0

• Lead wire length

0	0.6 m
1	1.5 m
2	3.0 m

Electrical characteristics

Item	Characteristic
Conductor resistance Ω/km, 20°C	65 or less
Withstand pressure V, 1 minute, AC	1000
Insulation resistance MΩ/km, 20°C	5 or more

Note) Cannot be used for transfer wiring. The minimum bending radius for cables is 20 mm.

	Terminal no.	Polarity		Lead wire colour	Dot marking
Station 1	SOL. A 1	(-)	(+)	Black	None
	SOL. B 14	(-)	(+)	Yellow	Black
Station 2	SOL. A 2	(-)	(+)	Brown	None
	SOL. B 15	(-)	(+)	Pink	Black
Station 3	SOL. A 3	(-)	(+)	Red	None
	SOL. B 16	(-)	(+)	Blue	White
Station 4	SOL. A 4	(-)	(+)	Orange	None
	SOL. B 17	(-)	(+)	Purple	None
Station 5	SOL. A 5	(-)	(+)	Yellow	None
	SOL. B 18	(-)	(+)	Grey	None
Station 6	SOL. A 6	(-)	(+)	Pink	None
	SOL. B 19	(-)	(+)	Orange	Black
Station 7	SOL. A 7	(-)	(+)	Blue	None
	SOL. B 20	(-)	(+)	Red	White
Station 8	SOL. A 8	(-)	(+)	Purple	White
	SOL. B 21	(-)	(+)	Brown	White
Station 9	SOL. A 9	(-)	(+)	Grey	Black
	SOL. B 22	(-)	(+)	Pink	Red
Station 10	SOL. A 10	(-)	(+)	White	Black
	SOL. B 23	(-)	(+)	Grey	Red
Station 11	SOL. A 11	(-)	(+)	White	Red
	SOL. B 24	(-)	(+)	Black	White
Station 12	SOL. A 12	(-)	(+)	Yellow	Red
	SOL. B 25	(-)	(+)	White	None
	COM. 13	(+)	(-)	Orange	Red



Positive COM. spec.      Negative COM. spec.      Note)

Note) When using the negative COM. specification for VQC1000/2000, use valves for negative COM.

Special Wiring Specifications (Option)

Mixed single and double wiring are available as options. The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. The total number of solenoids (points) must not exceed 24.

VV5QC11

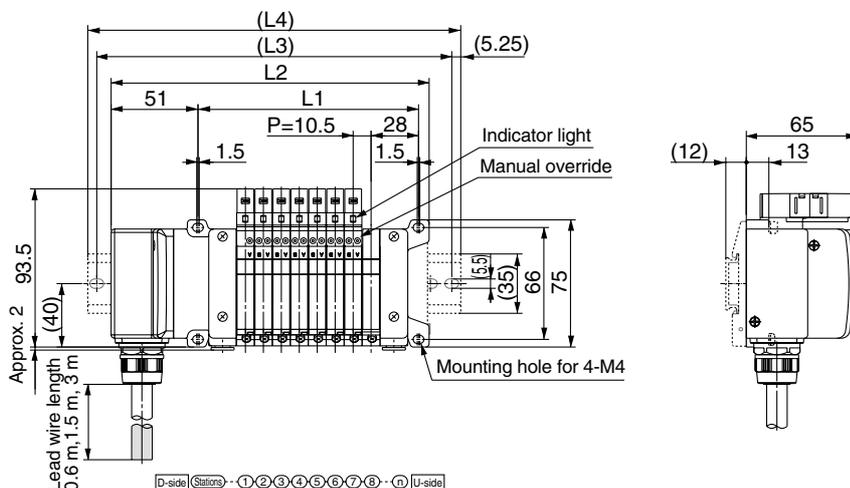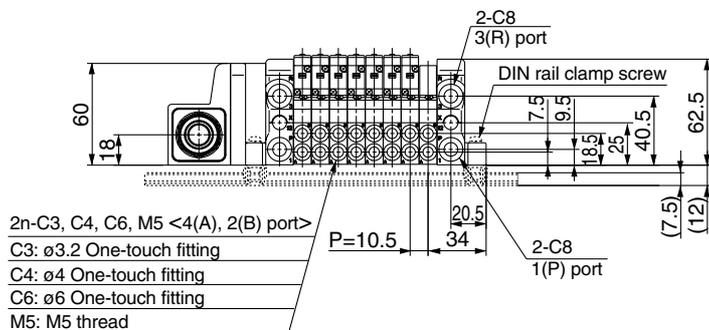

VQC

SQ

VQ0

VQ4

VQ5

VQZ

VQD

Formulas

$L1 = 10.5n + 45$  (Maximum 24 single wiring stations)

$L2 = 10.5n + 102$



n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L2	112.5	123	133.5	144	154.5	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5	333	343.5	354
L3	137.5	150	162.5	175	187.5	200	212.5	225	237.5	250	262.5	275	287.5	300	300	312.5	325	337.5	350	362.5	375	385.5	375	375
L4	148	160.5	173	185.5	198	210.5	223	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323	335.5	348	360.5	373	385.5	385.5	385.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

**VQC1000/2000/4000**  
**Kit (Lead wire kit) IP67 compliant**

VV5QC21

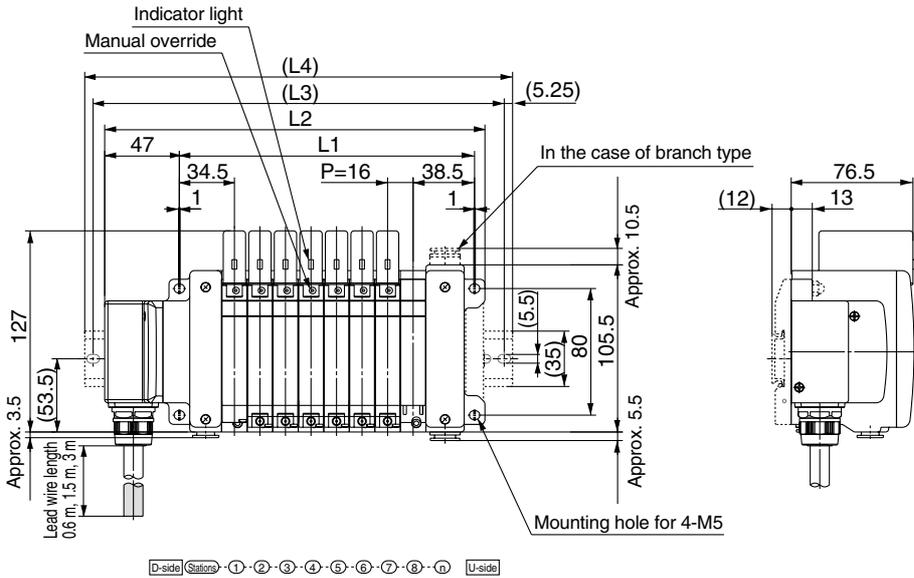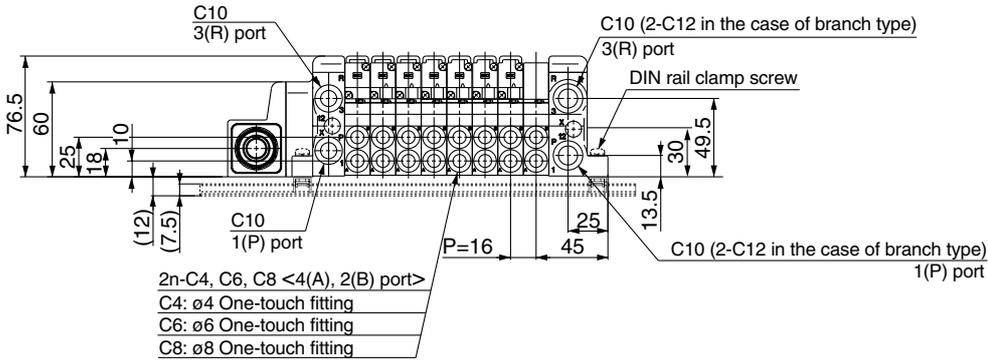

Formulas

$L1 = 16n + 57$  (Maximum 24 single wiring stations)



$L2 = 16n + 110.5$

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313	329	345	361	377	393	409	425	441
L2	126.5	142.5	158.5	174.5	190.5	206.5	222.5	238.5	254.5	270.5	286.5	302.5	318.5	334.5	350.5	366.5	382.5	398.5	414.5	430.5	446.5	462.5	478.5	494.5
L3	150	162.5	187.5	200	212.5	237.5	250	262.5	275	300	312.5	325	350	362.5	375	387.5	412.5	425	437.5	450	475	487.5	500	525
L4	160.5	173	198	210.5	223	248	260.5	273	285.5	310.5	323	335.5	360.5	373	385.5	398	423	435.5	448	460.5	485.5	498	510.5	535.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

VV5QC41

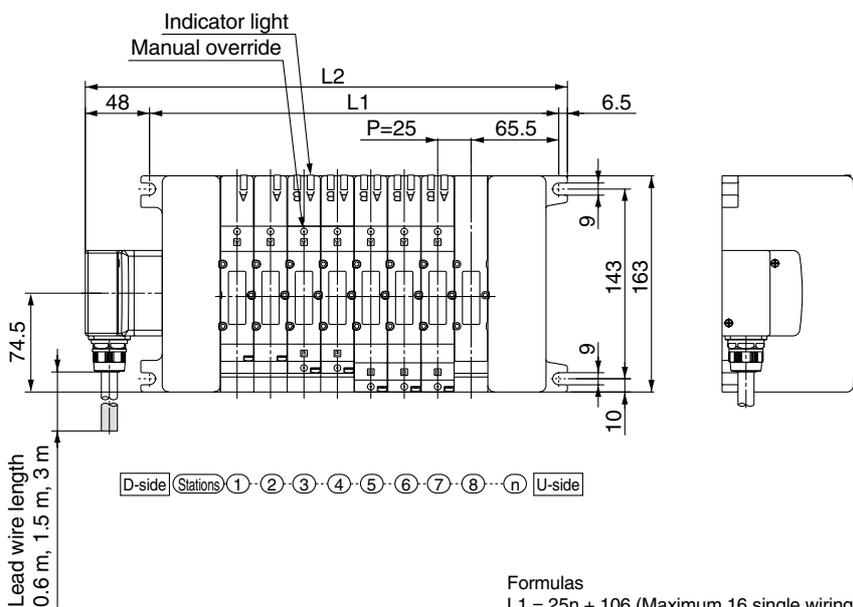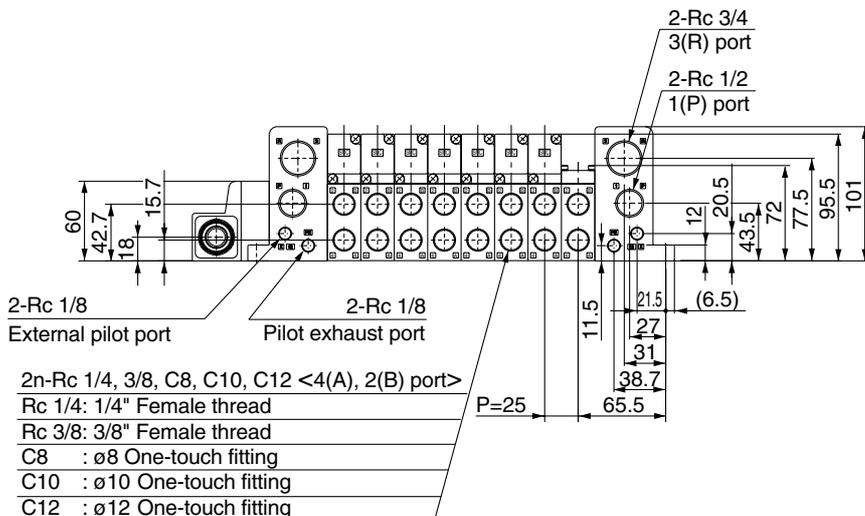

Formulas

$L1 = 25n + 106$  (Maximum 16 single wiring stations)

$L2 = 25n + 160.5$

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	185.5	210.5	235.5	260.5	285.5	310.5	335.5	360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5

VQC

SQ

VQ0

VQ4

VQ5


VQZ

VQD




VQC1000/2000/4000  
Kit (Multiple connector kit) IP67 compliant

- Use of multiple connectors helps streamline wiring procedure to save labor.
- IP67 enclosure is available with use of waterproof multiple connectors.

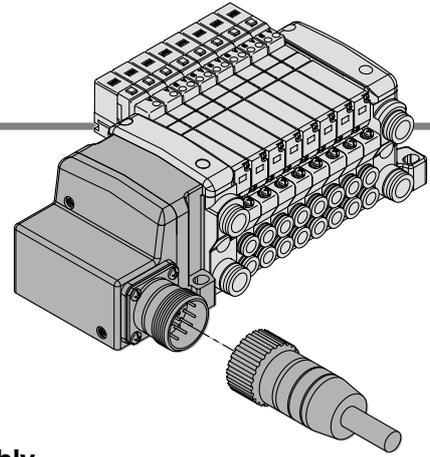

Electrical Wiring Specifications

Multiple connector



Double wiring (connected to SOL.A and SOL.B) is used for the internal wiring of each station regardless of valve and option types. Mixed single and double wiring are available as options. Refer to special wiring specifications (options) below.

	Terminal no.	Polarity	
Station 1	SOL.A 1	(-)	(+)
	SOL.B 2	(-)	(+)
Station 2	SOL.A 3	(-)	(+)
	SOL.B 4	(-)	(+)
Station 3	SOL.A 5	(-)	(+)
	SOL.B 6	(-)	(+)
Station 4	SOL.A 7	(-)	(+)
	SOL.B 8	(-)	(+)
Station 5	SOL.A 9	(-)	(+)
	SOL.B 10	(-)	(+)
Station 6	SOL.A 11	(-)	(+)
	SOL.B 12	(-)	(+)
Station 7	SOL.A 13	(-)	(+)
	SOL.B 14	(-)	(+)
Station 8	SOL.A 15	(-)	(+)
	SOL.B 16	(-)	(+)
Station 9	SOL.A 17	(-)	(+)
	SOL.B 18	(-)	(+)
Station 10	SOL.A 19	(-)	(+)
	SOL.B 20	(-)	(+)
Station 11	SOL.A 21	(-)	(+)
	SOL.B 22	(-)	(+)
Station 12	SOL.A 23	(-)	(+)
	SOL.B 24	(-)	(+)
(Maximum)	COM. 25	(+)	(-)
	COM. 26	(+)	(-)


Note)  
 Positive COM spec.    Negative COM spec.

Note) When using the negative COM specification for VQC1000/2000, use valves for negative COM.

Cable Assembly

■ Circular connector cable assembly (26 pins)

GAXT100-MC26 - □



Port cable length

Part no.	L dimension
GAXT100-MC26-015	1.5 m
GAXT100-MC26-030	3 m
GAXT100-MC26-050	5 m


Lead wire colors according to pin numbers

The color code is according to DIN47100.

Pin no.	Cable color	Identification
1	white	-
2	brown	-
3	green	-
4	yellow	-
5	grey	-
6	pink	-
7	blue	-
8	red	-
9	black	-
10	violet	-
11	grey	pink
12	red	blue
13	white	green
14	brown	green
15	white	yellow
16	yellow	brown
17	white	grey
18	grey	brown
19	white	pink
20	pink	brown
21	white	blue
22	brown	blue
23	white	red
24	brown	red
25	white	black
26*	bridged to pin 25	

\* only for circular connectors

Connector pin number (Arrangement as seen from the cable's port side)



Electrical characteristics

Item	Characteristics
Conductor resistance Ω/km, 20°C	57 or less
Electric strength V, 5min, AC	1500
Insulation resistance MΩ/km	20


(See also AXT100-MC26-<sup>015</sup><sub>030</sub><sup>050</sup> which conforms to colour code MIL-C24308)

\* For detailed specifications and handling, please contact SMC.

Special Wiring Specifications (Option)

Mixed single and double wiring are available as an option. The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. The total number of solenoids (points) must not exceed 24.

VV5QC11

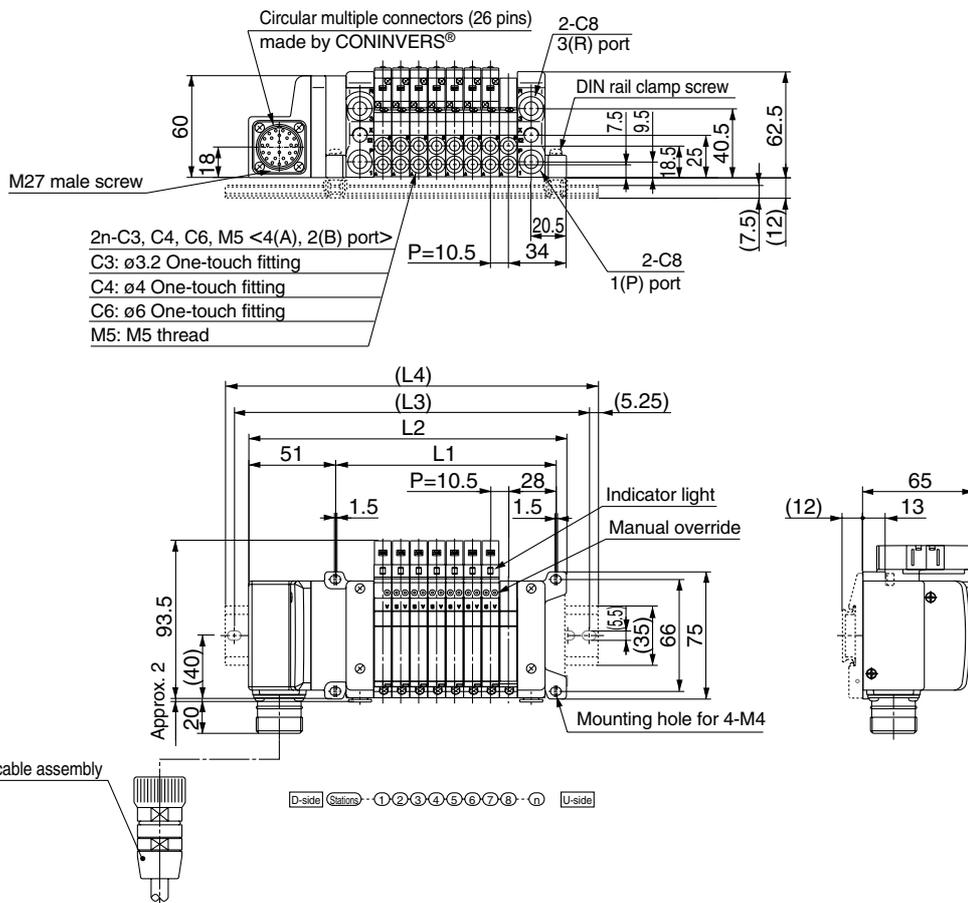

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

Formulas

$L1 = 10.5n + 45$  (Maximum 24 single wiring stations)

$L2 = 10.5n + 102$


n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	55.5	66	76.5	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L2	112.5	123	133.5	144	154.5	165	175.5	186	196.5	207	217.5	228	238.5	249	259.5	270	280.5	291	301.5	312	322.5	333	343.5	354
L3	137.5	150	162.5	175	175	187.5	200	212.5	225	237.5	237.5	250	262.5	275	287.5	300	300	312.5	325	337.5	350	362.5	375	375
L4	148	160.5	173	185.5	185.5	198	210.5	223	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323	335.5	348	360.5	373	385.5	385.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

**M** VQC1000/2000/4000  
Kit (Multiple connector kit) IP67 compliant

VV5QC21

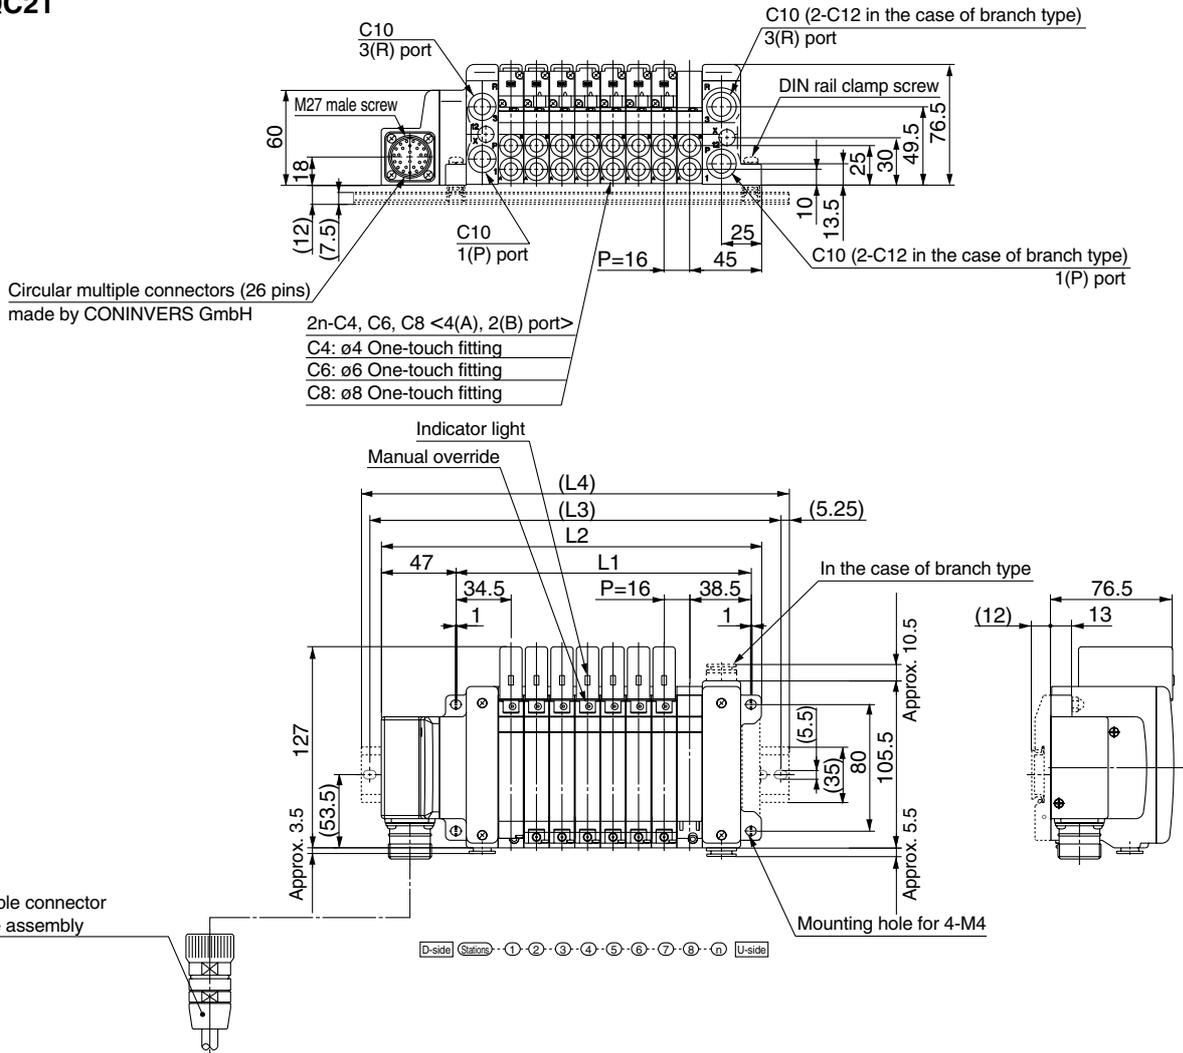


Formulas  
 $L1 = 16n + 57$  (Maximum 24 single wiring stations)  
 $L2 = 16n + 110.5$


L \ n	n: Stations																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L1	73	89	105	121	137	153	169	185	201	217	233	249	265	281	297	313	329	345	361	377	393	409	425	441
L2	126.5	142.5	158.5	174.5	190.5	206.5	222.5	238.5	254.5	270.5	286.5	302.5	318.5	334.5	350.5	366.5	382.5	398.5	414.5	430.5	446.5	462.5	478.5	494.5
L3	150	162.5	187.5	200	212.5	237.5	250	262.5	275	300	312.5	325	350	362.5	375	387.5	412.5	425	437.5	450	475	487.5	500	525
L4	160.5	173	198	210.5	223	248	260.5	273	285.5	310.5	323	335.5	360.5	373	385.5	398	423	435.5	448	460.5	485.5	498	510.5	535.5

\* With signal cut block, L4 is obtained by adding approximately 30 mm to L2.

VV5QC41

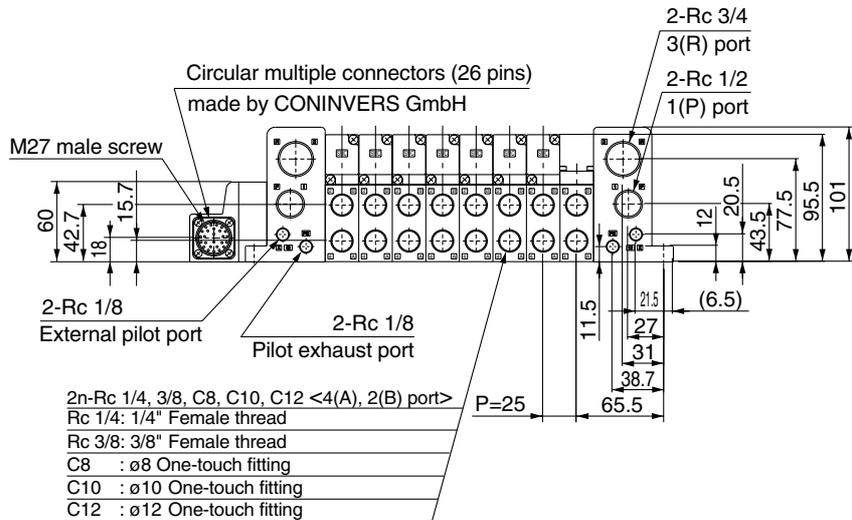

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

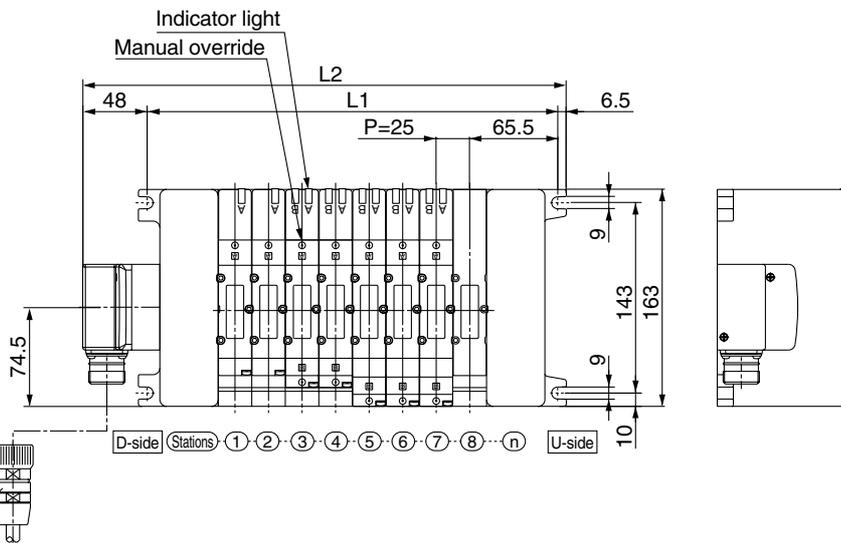

Multiple connector cable assembly

Formulas


$L1 = 25n + 106$  (Maximum 16 single wiring stations)

$L2 = 25n + 160.5$

n: Stations

L \ n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	131	156	181	206	231	256	281	306	331	356	381	406	431	456	481	506
L2	185.5	210.5	235.5	260.5	285.5	310.5	335.5	360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5

# Exploded View of Manifold

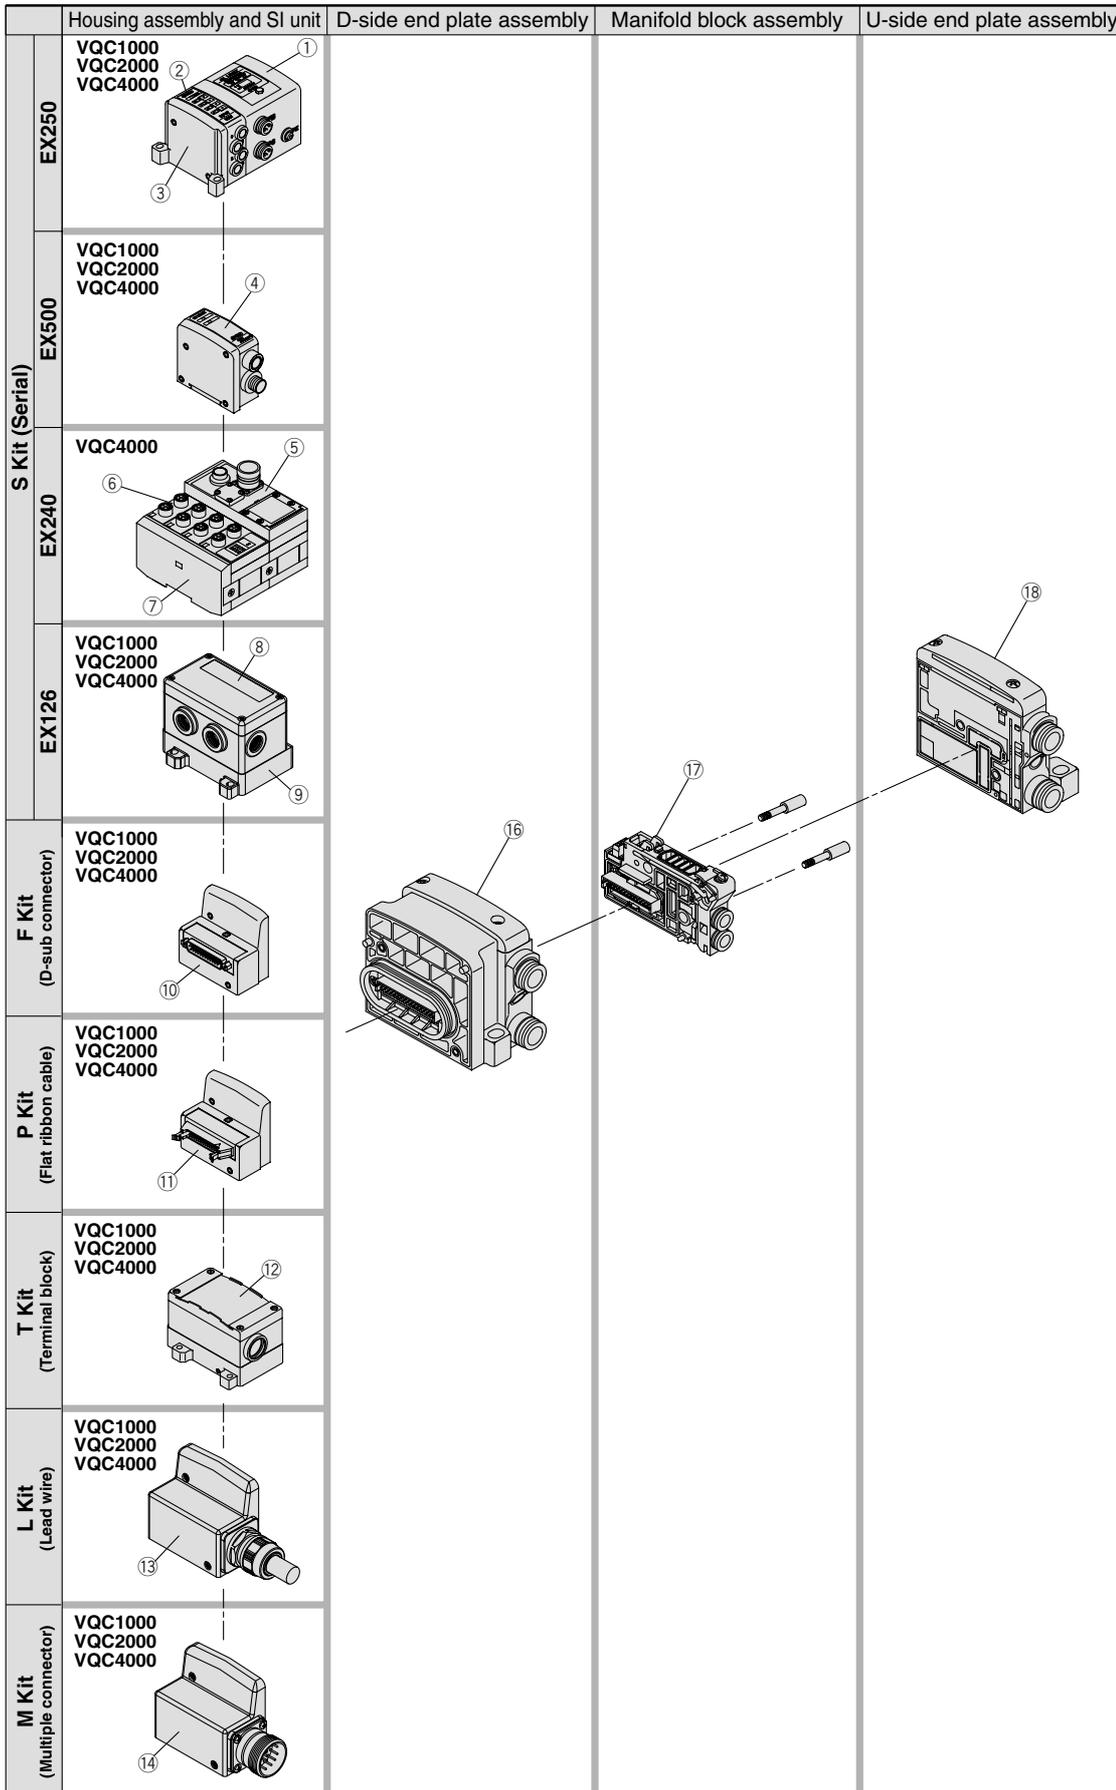

## Manifold Assembly Part No.

### Housing Assembly and SI Unit/Input Block

No.	Description	Part no.	Note	Applicable model		
				VQC1000	VQC2000	VQC4000
①	SI unit	EX250-SPR1	PROFIBUS-DP (-COM.)	●	●	●
		EX250-SAS□	AS-i (-COM.)	●	●	●
		EX250-SMJ	CC-LINK (+COM.)	●	●	●
		EX250-SDN1	DeviceNet (-COM.)	●	●	●
		EX250-SCA1	CANopen (-COM.)	●	●	●
②	Input block	EX250-IE1	M12, 2 inputs	●	●	●
		EX250-IE2	M12, 4 inputs	●	●	●
		EX250-IE3	M8, 4 inputs	●	●	●
③	End plate assembly	EX250-EA1	Standard	●	●	●
		EX250-EA2	DIN rail mounting	●	●	—
④	SI unit	EX500-Q001	DeviceNet (+COM.)	●	●	●
		EX500-Q001-X1	Remote I/O (+COM.)	●	●	●
		EX500-Q101	DeviceNet / PROFIBUS-DP (-COM.)	●	●	●
		EX500-Q101-X1	Remote I/O (-COM.)	●	●	●
⑤	SI unit	EX240-SDN2	DeviceNet (+COM.)	—	—	●
⑥	Input block	EX240-SPR1	PROFIBUS-DP (-COM.)	—	—	●
⑦	End cover assembly	EX240-IE1	M12, 8 inputs	—	—	●
		EX240-EA2	For manifold with input block	—	—	●
⑧	SI unit	EX240-EA4	For manifold without input block	—	—	●
		EX126D-SMJ1	CC-LINK (+COM.)	●	●	●
		VVQC1000-74A-2	For EX126 SI unit mounting	●	●	●
⑨	Terminal plate	VVQC1000-F25-1	F kit, 25 pins	●	●	●
⑩	D-sub connector housing assembly	VVQC1000-P26-1	P kit, 26 pins	●	●	●
⑪	Flat ribbon cable housing assembly	VVQC1000-P20-1	P kit, 20 pins	●	●	●
		VVQC1000-T0-1	T kit	●	●	●
⑫	Terminal block box housing assembly	VVQC1000-L25-0-1	L kit with 0.6 m lead wire	●	●	●
		VVQC1000-L25-1-1	L kit with 1.5 m lead wire	●	●	●
		VVQC1000-L25-2-1	L kit with 3.0 m lead wire	●	●	●
⑬	Multiple connector housing assembly	VVQC1000-M26-1	M kit 26 pins	●	●	●
⑭	Signal cut block	EX9-SC1-8	Double wiring of 1st to 8th stations	●	●	●
		EX9-SC2-4	Double wiring of 9th to 12th stations	●	●	●

VQC

SQ

VQ0

VQ4

VQ5


VQZ

VQD


### D-side end plate assembly

⑯ D-side end plate assembly part no.

VQC1000/2000

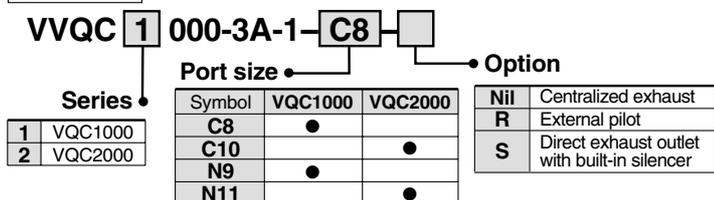


VQC4000

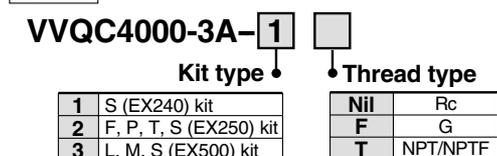


### U-side end plate assembly

⑰ U-side end plate assembly part no.


VQC1000/2000

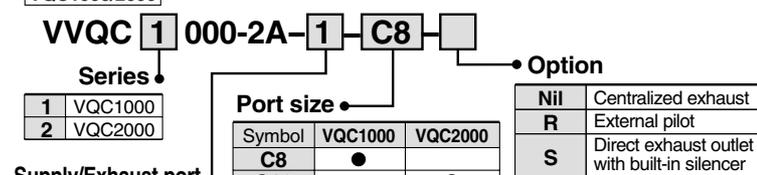

Supply/Exhaust port entry direction




VQC4000

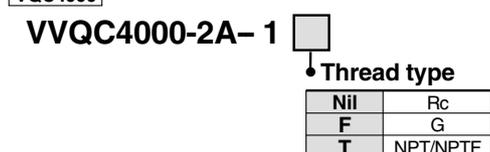

### Manifold block assembly

⑱ Manifold block assembly part no.

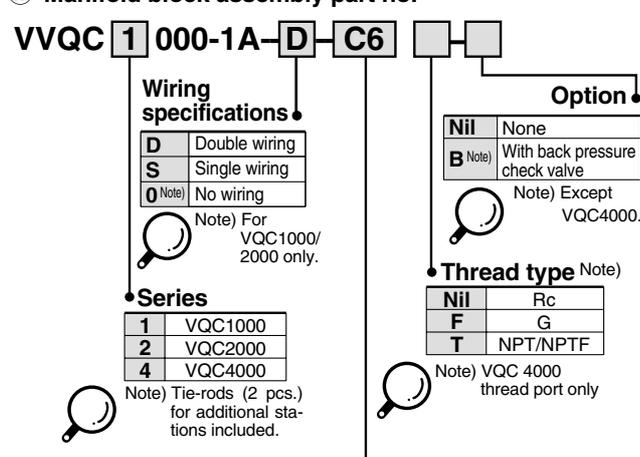


### Port size

Symbol	Port size	VQC1000	VQC2000	VQC4000
C3	For ø3.2 One-touch fitting	●		
C4	For ø4 One-touch fitting	●	●	
C6	For ø6	●	●	
C8	For ø8		●	●
C10	For ø10			●
C12	For ø12			●
N1	For ø1/8"	●		
N3	For ø5/32"	●	●	
N7	For ø1/4"	●	●	●
N9	For ø5/16"		●	●
N11	For ø3/8"			●
M5	For M5 thread	●		
O2	Rc 1/4"			●
O3	Rc 3/8"			●
B	Rc 1/4" bottom ported			●
C0	Without One-touch fitting	●	●	●

# Manifold Specification Sheet

## Series VQC1000: Base Mounted/Plug-in Unit

### ① How to order manifold

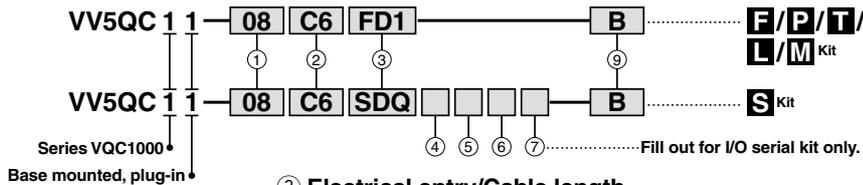

#### ① Stations

01	1 station
⋮	⋮

The maximum number of stations differs depending on the electrical entry. Refer to ③.

#### ② Cylinder port size

C3	With ø3.2 One-touch fitting
C4	With ø4 One-touch fitting
C6	With ø6 One-touch fitting
M5	M5 thread
CM	Mixed sizes and with port plug
L3	Top ported elbow With ø3.2 One-touch fitting
L4	Top ported elbow With ø4 One-touch fitting
L6	Top ported elbow With ø6 One-touch fitting
L5	M5 thread
B3	Bottom ported elbow With ø3.2 One-touch fitting
B4	Bottom ported elbow With ø4 One-touch fitting
B6	Bottom ported elbow With ø6 One-touch fitting
B5	M5 thread
LM	Elbow port, mixed sizes

Note 1) Indicate the size in the specification sheet in the case of CM and LM.

Note 2) Symbols for inch sizes are as follows:

<For One-touch fittings>

N1: ø1/8"

N3: ø5/32"

N7: ø1/4"

NM: Mixed

The top ported elbow is LN□ and the bottom ported elbow is BN□.

### ③ Electrical entry/Cable length

	D-side entry	Kit, Cable length	Stations <sup>Note 2)</sup>	
F Kit	FD0	D-sub connector kit (25P) without cable	1 to 12 (24)	
	FD1	D-sub connector kit (25P) with 1.5 m cable		
	FD2	D-sub connector kit (25P) with 3.0 m cable		
P Kit	PD0	Flat ribbon cable kit (26P) without cable	1 to 12 (24)	
	PD1	Flat ribbon cable kit (26P) with 1.5 m cable		
	PD2	Flat ribbon cable kit (26P) with 3.0 m cable		
	PD3	Flat ribbon cable kit (26P) with 5.0 m cable		
T Kit	PDC	Flat ribbon cable kit (20P) without cable <sup>Note 1)</sup>	1 to 9 (18)	
L Kit	LD0	Terminal block box kit	1 to 10 (20)	
	LD1	Lead wire kit (25 core) 0.6 m lead wire	1 to 12 (24)	
	LD2	Lead wire kit (25 core) 1.5 m lead wire		
LD3	Lead wire kit (25 core) 3.0 m lead wire			
M Kit	MD0	Multiple connector kit (26P) without cable	1 to 12 (24)	
	MD1	Multiple connector kit (27P) with 1.5 m cable		
	MD2	Multiple connector kit (27P) with 3.0 m cable		
S Kit	<b>Decentralized wiring serial kit (EX500)</b>		1 to 8 (16)	
	SD0A	Serial kit without SI unit		
	SDA1	Serial kit for Remote I/O		
	SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	1 to 12 (24)	
	<b>Input/Output serial kit (EX250)</b>			
	SD0	Serial kit without SI unit		
	SDQ	Serial kit DeviceNet compatible		
	SDN	Serial kit PROFIBUS-DP compatible		
	SDV	Serial kit CC-LINK compatible		
	SDY	Serial kit CANopen compatible		
	SDTA	AS-i, 8 in/8 out, 31 slave modes, 2 power supply		1 to 4 (8)
	SDTB	AS-i, 4 in/4 out, 31 slave modes, 2 power supply		1 to 2 (4)
	SBTC	AS-i, 8 in/8 out, 31 slave modes, 1 power supply		1 to 4 (8)
SDTD	AS-i, 4 in/4 out, 31 slave modes, 1 power supply	1 to 2 (4)		
<b>Output serial transmission kit (EX126)</b>		1 to 8 (16)		
SDVB	Serial kit CC-LINK compatible			

Note 1) P Kit: Order the cable assembly separately for the type 20P.

Note 2) Numbers inside ( ) indicate the maximum number of solenoids for mixed single and double wiring. The maximum number of stations is determined by the total number of solenoids. In the case of mixed wiring, use the option symbol "-K".

### ④ SI unit COM.

SI unit COM	EX250					EX500				EX126
	DeviceNet	PROFIBUS-DP	CC-LINK	AS-i	CANopen	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O	CC-LINK
Nil	+	+	○	—	—	○	○	○	○	○
N	○	○	—	○	○	○	○	○	○	—

Note) Leave the box blank for the SI unit COM without SI unit (SD0).

### ⑤ Input block (Fill out for I/O unit only)

Nil	Without SI unit/input block (SD0)
0	Without input block
1	With 1 input block
⋮	⋮
8	With 8 input blocks

### ⑥ Input block type (Fill out for I/O unit only)

Nil	Without input block
1	M12, 2 inputs
2	M12, 4 inputs
3	M8, 4 inputs (3 pins)

### ⑦ Input block COM. (Fill out for I/O unit only)

Nil	PNP (+) or without SI unit/input block
N	NPN (-)

### ⑨ Option

Nil	None
B	All stations with back pressure check valve <sup>Note 1)</sup>
D	With DIN rail (Rail length: standard)
D□	With DIN rail (Rail length: special) <sup>Note 2)</sup>
K	Special wiring specifications <sup>Note 3)</sup> (Except double wiring)
N	With name plate
R	External pilot <sup>Note 4)</sup>
S	Direct exhaust with built-in silencer <sup>Note 5)</sup>

\* When specifying more than one option, enter symbols in alphabetical order. Example: -BRS

Note 1) When using the back pressure check valve for the necessary stations only, enter the back pressure check valve part no. and indicate the number of manifold stations in the specification sheet.

Note 2) For special DIN rail length, indicate "D□." (Enter the number of stations inside □.) Example: -D08


In this case, stations will be mounted on a DIN rail for 8 stations regardless of the actual number of manifold stations. The specified number of stations must be larger than the number of stations on the manifold.

Note 3) Be sure to indicate the wiring specifications in the specification sheet.

Note 4) For external pilot option, "-R", indicate the external pilot specification "R" for the applicable valves as well.

Note 5) The built-in silencer type does not satisfy the IP67 standard.

### ② How to order applicable valves



#### A) Type of actuation

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center
A <sup>Note)</sup>	Dual 3 port valve (N.C. + N.C.)
B <sup>Note)</sup>	Dual 3 port valve (N.O. + N.O.)
C <sup>Note)</sup>	Dual 3 port valve (N.C. + N.O.)

Note) Available for the rubber seal type only.

#### B) Seal type

0	Metal seal
1	Rubber seal

#### C) Function

Nil	Standard type (1 W)
K <sup>Note 1)</sup>	High voltage type (1.0 MPa)
N	Negative COM.
R <sup>Note 2)</sup>	External pilot
Y	Low wattage type (0.5 W)

\* When specifying more than one option, enter symbols in alphabetical order.

Note 1) Available for the metal seal type only.

Note 2) Not applicable to dual 3 port valve.

#### D) Coil voltage


5	24 VDC <sup>Note)</sup>
6	12 VDC

Note) S kit is only available for 24 VDC.

#### E) Light/Surge voltage suppressor

Nil	With
E	Without <sup>Note)</sup>

Note) Not applicable to S kit.

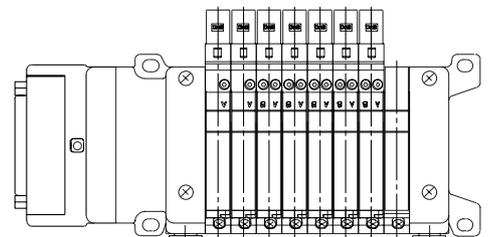

D-side Stations...1...2...3...4...5...6...7...8...n U-side

\* Stations are numbered in ascending order from the D-side.

#### F) Manual override

Nil	Non-locking push type (Tool required)
B	Slotted locking type (Tool required)
C	Locking type (Manual)
D	Slide locking type (Manual)

# Series VQC1000/Plug-in Unit

Manifold model

<F, L, M, P, T kit>



<S kit>



Base mounted, plug-in  
 Kit type  
 Option  
**Series VQC1000**

Date: / /

Customer name			
Contact person			
Specification sheet no.			
Purchase order no.			
Equipment name			
Quantity	set(s)	Required date	

## Specifications

← D-side

\* Indicate required stations with a "O".

U-side →

Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
<b>Valves</b>	Single																									
	Double																									
	Closed center																									
	Exhaust center																									
	Pressure center																									
	Dual 3 port valve (A)																									
	Dual 3 port valve (B)																									
	Dual 3 port valve (C)																									
<b>Options</b>	Blanking plate VVQ1000-10A-1																									
	Individual SUP spacer VVQ1000-P-1-C6 SUP shutoff position: Specify 2 positions.																									
	Individual EXH spacer VVQ1000-R-1-C6 EXH shutoff position: Specify 2 positions.																									
	SUP block plate VVQ1000-16A																									
	EXH shutoff position Note 1) (When using EXH block base (VVQC1000-19A-□-□-□))																									
Port plug Note 2)			A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
<b>Cylinder port sizes</b> <small>Note 3) Fill out in case of mixed sizes (CM/LM/NM).</small>	With ø3.2 (ø1/8") One-touch fitting	Side ported	C3 (N1)																							
	With ø4 (ø5/32") One-touch fitting	Side ported	C4 (N3)																							
	With ø6 (ø1/4") One-touch fitting	Side ported	C6 (N7)																							
	M5 thread	Side ported	M5																							
	Dual flow fitting VVQ1000-52A-C8																									
Special wiring Note 4) specifications	Single wiring																									
	Double wiring																									

Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
<b>Notes</b>	Note 1) Indicate the shutoff position. The D-side of the EXH block in the EXH passage is blocked.																									
	Note 2) When using port plugs, circle ports to specify.																									
	Note 3) When mounting an elbow fitting assembly (VVQ1000-F-L- <sup>C3</sup> / <sub>C4</sub> ), indicate "L" in the table above.																									
	Note 4) In the case of single wiring or mixed wiring, connections to the connector terminals start from the A-side solenoid of station 1 and continue in order without skip ping any terminals.																									

**For SMC use only**

## Applicable valves and options


Part no.	Qty.

Part no.	Qty.

Order no.	
Clerk (code no.)	
Dept. code	

# Series VQC2000: Base Mounted/Plug-in Unit

## ① How to order manifold

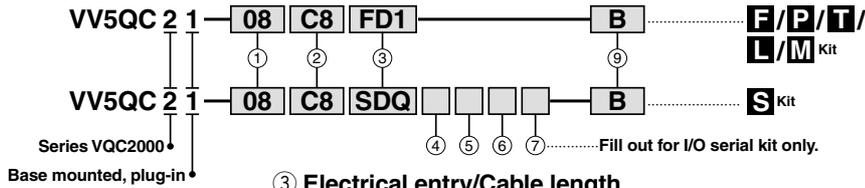

### ① Stations

01	1 station
⋮	⋮

The maximum number of stations differs depending on the electrical entry. Refer to ③.

### ② Cylinder port size

C4	With ø4 One-touch fitting
C6	With ø6 One-touch fitting
C8	With ø8 One-touch fitting
CM	Mixed or with port plug
L4	Top ported elbow With ø4 One-touch fitting
L6	Top ported elbow With ø6 One-touch fitting
L8	Top ported elbow With ø8 One-touch fitting
B4	Bottom ported elbow With ø4 One-touch fitting
B6	Bottom ported elbow With ø6 One-touch fitting
B8	Bottom ported elbow With ø8 One-touch fitting
LM	Elbow port, mixed sizes

Note 1) Indicate the size in the specification sheet in the case of CM and LM.

Note 2) Symbols for inch sizes are as follows:

#### <For One-touch fittings>

- N3: ø5/32"
- N7: ø1/4"
- N9: ø5/16"
- NM: Mixed

The top ported elbow is LN□ and the bottom ported elbow is BN□.

### ③ Electrical entry/Cable length

	D-side entry	Kit, Cable length	Stations <sup>Note 2)</sup>
F Kit	FD0	D-sub connector kit (25P) without cable	1 to 12 (24)
	FD1	D-sub connector kit (25P) with 1.5 m cable	
	FD2	D-sub connector kit (25P) with 3.0 m cable	
	FD3	D-sub connector kit (25P) with 5.0 m cable	
P Kit	PD0	Flat ribbon cable kit (26P) without cable	1 to 12 (24)
	PD1	Flat ribbon cable kit (26P) with 1.5 m cable	
	PD2	Flat ribbon cable kit (26P) with 3.0 m cable	
	PD3	Flat ribbon cable kit (26P) with 5.0 m cable	
PDC		Flat ribbon cable kit (20P) without cable <sup>Note 1)</sup>	1 to 9 (18)
T Kit	TD0	Terminal block box kit	1 to 10 (20)
L Kit	LD0	Lead wire kit (25 core) 0.6 m lead wire	1 to 12 (24)
	LD1	Lead wire kit (25 core) 1.5 m lead wire	
	LD2	Lead wire kit (25 core) 3.0 m lead wire	
M Kit	MD0	Multiple connector kit (26P) without cable	1 to 12 (24)
	MD1	Multiple connector kit (27P) with 1.5 m cable	
	MD2	Multiple connector kit (27P) with 3.0 m cable	
	MD3	Multiple connector kit (27P) with 5.0 m cable	
S Kit	<b>Decentralized wiring serial kit (EX500)</b>		1 to 8 (16)
	SD0A	Serial kit without SI unit	
	SDA1	Serial kit for Remote I/O	
	SDA2	Serial kit for DeviceNet/PROFIBUS-DP/CC-LINK	
	<b>Input/Output serial kit (EX250)</b>		1 to 12 (24)
	SD0	Serial kit without SI unit	
	SDQ	Serial kit DeviceNet compatible	
	SDN	Serial kit PROFIBUS-DP compatible	
	SDV	Serial kit CC-LINK compatible	
	SDY	Serial kit CANopen compatible	
	SDTA	AS-i, 8 in/8 out, 31 slave modes, 2 power supply	1 to 4 (8)
	SDTB	AS-i, 4 in/4 out, 31 slave modes, 2 power supply	1 to 2 (4)
	SDTC	AS-i, 8 in/8 out, 31 slave modes, 1 power supply	1 to 4 (8)
	SDTD	AS-i, 4 in/4 out, 31 slave modes, 1 power supply	1 to 2 (4)
	<b>Output serial transmission kit (EX126)</b>		1 to 8 (16)
SDVB	Serial kit CC-LINK compatible		

Note 1) P Kit: Order the cable assembly separately for the type 20P.

Note 2) Numbers inside ( ) indicate the maximum number of solenoids for mixed single and double wiring. The maximum number of stations is determined by the total number of solenoids. In the case of mixed wiring, use the option symbol "K".

### ④ SI unit COM.

SI unit COM	EX250					EX500			EX126	
	DeviceNet	PROFIBUS-DP	CC-LINK	AS-i	CANopen	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O	CC-LINK
Nil +COM	—	—	○	—	—	○	○	○	○	○
N -COM	○	○	—	○	○	○	○	○	○	—

Note) Leave the box blank for the SI unit COM without SI unit (SD0).

### ⑤ Input block (Fill out for I/O unit only)

Nil	Without SI unit/input block (SD0)
0	Without input block
1	With 1 input block
⋮	⋮
8	With 8 input blocks

### ⑥ Input block type (Fill out for I/O unit only)

Nil	Without input block
1	M12, 2 inputs
2	M12, 4 inputs
3	M8, 4 inputs (3 pins)

### ⑦ Input block COM. (Fill out for I/O unit only)

Nil	PNP (+) or without SI unit/input block
N	NPN (-)

### ⑨ Option

Nil	None
B	All stations with back pressure check valve <sup>Note 1)</sup>
D	With DIN rail (Rail length: standard)
D□	With DIN rail (Rail length: special) <sup>Note 2)</sup>
K	Special wiring specifications <sup>Note 3)</sup> (Except double wiring)
N	With name plate
R	External pilot <sup>Note 4)</sup>
S	Direct exhaust with built-in silencer <sup>Note 5)</sup>
T	Branched P and R ports on U side <sup>Note 6)</sup>

\* When specifying more than one option, enter symbols in alphabetical order. Example: -BRS

Note 1) When using the back pressure check valve for the necessary stations only, enter the back pressure check valve part no. and indicate the number of manifold stations on the specification sheet.

Note 2) For special DIN rail length, indicate "D□." (Enter the number of stations inside □.)

Example: -D08  
In this case, stations will be mounted on a DIN rail for 8 stations regardless of the actual number of manifold stations.

The specified number of stations must be larger than the number of stations on the manifold. Indicate "-D0" for the option without DIN rail.


Note 3) Be sure to indicate the wiring specifications on the specification sheet.

Note 4) For external pilot option, "-R", indicate the external pilot specification "R" for the applicable valves as well.

Note 5) The built-in silencer type does not satisfy the IP67 standard.

Note 6) The SUP and EXH ports on U side are branched (toward the cylinder port and coil) with ø12 one-touch fittings for connection.

## ② How to order applicable valves



### ① Type of actuation

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center
A <sup>Note)</sup>	Dual 3 port valve (N.C. + N.C.)
B <sup>Note)</sup>	Dual 3 port valve (N.O. + N.O.)
C <sup>Note)</sup>	Dual 3 port valve (N.C. + N.O.)

Note) Available for the rubber seal type only.

### ② Seal type

0	Metal seal
1	Rubber seal

### ③ Function

Nil	Standard type (1 W)
K <sup>Note 1)</sup>	High voltage type (1.0 MPa)
N	Negative COM.
R <sup>Note 2)</sup>	External pilot
Y	Low wattage type (0.5 W)

\* When specifying more than one option, enter symbols in alphabetical order.

Note 1) Available for the metal seal type only.

Note 2) Not applicable to Dual 3 port valve.

### ④ Coil voltage


5	24 VDC <sup>Note)</sup>
6	12 VDC

Note) S kit is only available for 24 VDC.

### ⑤ Light/Surge voltage suppressor

Nil	With
E	Without <sup>Note)</sup>

Note) Not applicable to S kit.

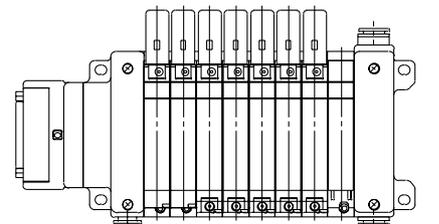

D-side Stations...1...2...3...4...5...6...7...8...n U-side

\* Stations are numbered in ascending order from the D-side.


### ⑥ Manual override

Nil	Non-locking push type (Tool required)
B	Slotted locking type (Tool required)
C	Locking type (Manual)
D	Slide locking type (Manual)


# Series VQC2000/Plug-in Unit

Manifold model

<F, L, M, P, T kit>



<S kit>

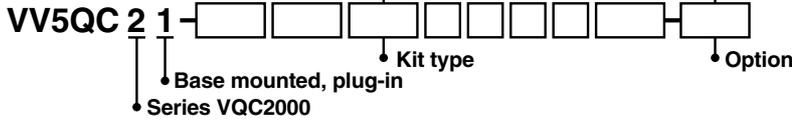

Date: / /

Customer name			
Contact person			
Specification sheet no.			
Purchase order no.			
Equipment name			
Quantity	set(s)	Required date	

## Specifications

← D-side

\* Indicate required stations with a "O".

U-side →

Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
<b>Valves</b>	Single																											
	Double																											
	Closed center																											
	Exhaust center																											
	Pressure center																											
	Dual 3 port valve (A)																											
	Dual 3 port valve (B)																											
	Dual 3 port valve (C)																											
<b>Options</b>	Blanking plate VVQ2000-10A-1																											
	Individual SUP spacer VVQ2000-P-1-C8																											
	SUP shutoff position: Specify 2 positions.																											
	Individual EXH spacer VVQ2000-R-1-C8																											
	EXH shutoff position: Specify 2 positions.																											
SUP block plate VVQ2000-16A																												
EXH block plate VVQ2000-19A																												
Port plug Note 1)			A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B		
<b>Cylinder port sizes</b> Fill out in case of mixed sizes (C/M/L/M/M/M).	With ø4 (ø5/32") One-touch fitting	Side ported	C4 (N3)																									
	With ø6 (ø1/4") One-touch fitting	Side ported	C6 (N7)																									
	With ø8 (ø5/16") One-touch fitting	Side ported	C8 (N9)																									
Special wiring Note 2) specifications	Single wiring																											
	Double wiring																											
Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
<b>Notes</b>	Note 1) When using port plugs, circle ports to specify.																											
	Note 2) In the case of single wiring or mixed wiring, connections to the connector terminals start from the A-side solenoid of station 1 and continue in order without skipping any terminals.																											

- VQC
- SQ
- VQ0
- VQ4
- VQ5
- VQZ
- VQD

--- For SMC use only ---

### Applicable valves and options

Part no.	Qty.


Part no.	Qty.

Order no.	
Clerk (code no.)	
Dept. code	

# Manifold Specification Sheet

## Series VQC4000: Base Mounted/Plug-in Unit

### ① How to order manifold

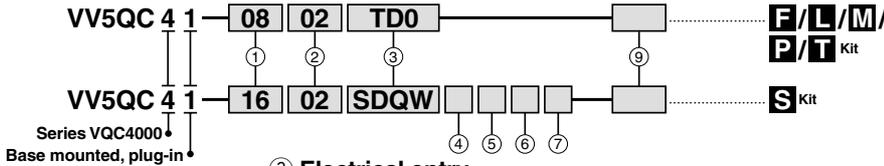

#### ① Stations

01	1 station
⋮	⋮

The maximum number of stations differs depending on the electrical entry. Refer to ③.

#### ② Cylinder port size

C8	With ø8 One-touch fitting
C10	With ø10 One-touch fitting
C12	With ø12 One-touch fitting
02	Rc 1/4
03	Rc 3/8
B	Bottom ported Rc 1/4
CM	Mixed

Note 1) Indicate the size in the specification order sheet in the case of CM.

Note 2) Symbols for inch sizes are as follows:

<For One-touch fittings>

- N7: ø1/4"
- N9: ø5/16"
- N11: ø3/8"
- NM: Mixed

<For threads> P, R, A, B port  
VV5QC41-0803  TD0

Cylinder port  
Thread type

Nil	Rc
F	G
T	NPT/NPTF

Note) P and R ports use the same type of threads.

### ③ Electrical entry

	D-side entry	Kit, Cable length	Stations Note 2)
F Kit	FD0	D-sub connector kit (25P) without cable	1 to 12 (24)
	FD1	D-sub connector kit (25P) with 1.5 m cable	
	FD2	D-sub connector kit (25P) with 3.0 m cable	
	FD3	D-sub connector kit (25P) with 5.0 m cable	
P Kit	PD0	Flat ribbon cable kit (26P) without cable	1 to 12 (24)
	PD1	Flat ribbon cable kit (26P) with 1.5 m cable	
	PD2	Flat ribbon cable kit (26P) with 3.0 m cable	
	PD3	Flat ribbon cable kit (26P) with 5.0 m cable	
T Kit	TD0	Terminal block box kit	1 to 10 (20)
L Kit	LD0	Lead wire kit (25 core) 0.6 m lead wire	1 to 12 (24)
	LD1	Lead wire kit (25 core) 1.5 m lead wire	
	LD2	Lead wire kit (25 core) 3.0 m lead wire	
M Kit	MD0	Multiple connector kit (26P) without cable	1 to 12 (24)
	MD1	Multiple connector kit (27P) with 1.5 m cable	
	MD2	Multiple connector kit (27P) with 3.0 m cable	
	MD3	Multiple connector kit (27P) with 5.0 m cable	
S Kit	<b>Decentralized wiring serial kit (EX500)</b>		1 to 8 (16)
	SD0A	Serial kit without SI unit	
	SDA1	Serial kit for Remote I/O	
	<b>Input/Output serial kit (EX250)</b>		1 to 12 (24)
	SD0	Serial kit without SI unit	
	SDQ	Serial kit DeviceNet compatible	
	SDN	Serial kit PROFIBUS-DP compatible	
	SDV	Serial kit CC-LINK compatible	
	SDY	Serial kit CANopen compatible	
	<b>Input/Output serial transmission kit (EX240)</b>		1 to 12 (16)
	SD0W	Serial kit without SI unit	
	SDQW	Serial kit DeviceNet compatible	
SDNW	Serial kit PROFIBUS-DP compatible		
SDVW	Serial kit CC-LINK compatible		
SDTA	AS-i, 8 in/8 out, 31 slave modes, 2 power supply		
SDTB	AS-i, 4 in/4 out, 31 slave modes, 2 power supply	1 to 2 (4)	
SDTC	AS-i, 8 in/8 out, 31 slave modes, 1 power supply	1 to 4 (8)	
SDTD	AS-i, 4 in/4 out, 31 slave modes, 1 power supply	1 to 2 (4)	
<b>Output serial transmission kit (EX126)</b>		1 to 8 (16)	
SDVB	Serial kit CC-LINK compatible		

Note 1) P Kit: Order the cable assembly separately for the type 20P.

Note 2) Numbers inside ( ) indicate the maximum number of solenoids for mixed single and double wiring. The maximum number of stations is determined by the total number of solenoids. In the case of mixed wiring, use the option symbol "K".

### ④ SI unit COM.

SI unit COM	EX240			EX250			EX500			EX126
	DeviceNet	PROFIBUS-DP	CC-LINK	DeviceNet	PROFIBUS-DP	CC-LINK	DeviceNet	PROFIBUS-DP	CC-LINK	Remote I/O
Nil +COM	○	—	—	○	—	—	○	—	—	○
N -COM	○	○	○	○	○	○	○	○	○	○

Note) Leave the box blank for the SI unit COM. without SI unit (SD0).

### ② How to order applicable valves



#### A) Type of actuation

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center
6	3 position perfect

#### D) Coil voltage

5	24 VDC (Note)
6	12 VDC

Note) S kit is only available for 24 VDC.

#### B) Seal type

0	Metal seal
1	Rubber seal

#### E) Light/Surge voltage suppressor

Nil	With
E	Without indicator light, with surge voltage suppressor

#### F) Manual override

Nil	Non-locking push type (Tool required)
B	Slotted locking type (Tool required)

#### C) Function

Nil	Standard type (1 W)
R	External pilot
Y	Low wattage type (0.5 W)

\* When specifying more than one option, enter symbols in alphabetical order.

### ⑤ Input block (Fill out for I/O unit only)

Nil	Without SI unit/input block [SD0(W)]
0	Without input block
1	With 1 input block
⋮	⋮
8	With 8 input blocks

Note) Max. 4 for EX240 and max 8 for EX250.

### ⑥ Input block type (Fill out for I/O unit only)

Nil	Without input block
1	M12, 8 inputs (EX240)
2	M12, 2 inputs (EX250)
3	M12, 4 inputs (EX250)
4	M8, 4 inputs (EX250)

### ⑦ Input block COM. (Fill out for I/O unit only)

Nil	PNP (+) or without SI unit/input block
N	NPN (-)


### ⑨ Options

Nil	None
K	Special wiring specifications Note 1) (Except double wiring)
N	With name plate Note 2) (available for T Kit only)

\* When specifying more than one option, enter symbols in alphabetical order. Example: -KN

Note 1) Be sure to indicate the wiring specifications in the specification order sheet.

Note 2) The mounting position of the name plate is on the top face of the cover for the terminal block box.

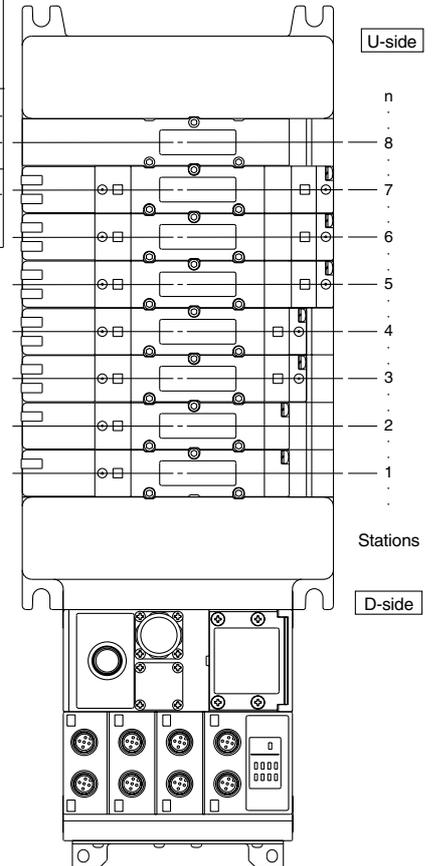


\* Stations are numbered in ascending order from the D-side.

**Series VQC4000/Plug-in Unit**

Manifold model

Date: / /

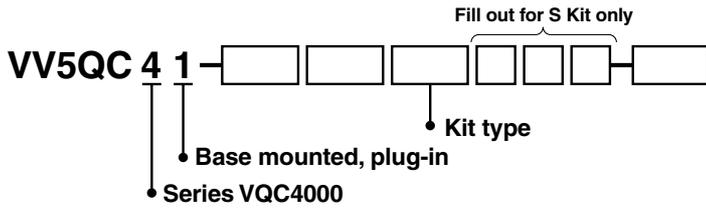

Customer name			
Contact person			
Specification sheet no.			
Purchase order no.			
Equipment name			
Quantity	set(s)	Required date	

**Specifications**

← D-side

\* Indicate required stations with a "O".

U-side →

Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
<b>Valves</b>	Single																											
	Double																											
	Closed center																											
	Exhaust center																											
	Pressure center																											
	Perfect																											
	<b>Options</b>	Blanking plate VVQ4000-10A-1																										
Individual SUP spacer VVQ4000-P-1-02/03																												
Individual EXH spacer VVQ4000-P-1-02/03																												
Throttle valve spacer VVQ4000-20A-1																												
Perfect spacer with residual pressure release valve VVQ4000-25A-1																												
Interface regulator (A regulator) ARBQ4000-00-A-1																												
Interface regulator (B regulator) ARBQ4000-00-B-1																												
Interface regulator (P regulator) ARBQ4000-00-P-1																												
<b>Cylinder port sizes</b> <small>Fill out in case of mixed sizes (CM/L/M/N/M).</small>	Rc 1/4	02																										
	Rc 3/8	03																										
	With ø8 (ø1/4") One-touch fitting	C8 (N7)																										
	With ø10 (ø5/16") One-touch fitting	C10 (N9)																										
	With ø12 (ø3/8") One-touch fitting	C12 (N11)																										
	Bottom ported Rc 1/4																											
<b>Special wiring</b> <small>Note 1)</small> specifications	Single wiring																											
	Double wiring																											
Description/Model		Stations	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
<b>Note</b>	Note 1) In the case of single wiring or mixed wiring, connections to the connector terminals start from the A-side solenoid of station 1 and continue in order without skipping any terminals.																											

- VQC**
- SQ**
- VQ0**
- VQ4**
- VQ5**
- VQZ**
- VQD**

--- For SMC use only ---

**Applicable valves and options**

Part no.	Qty.

Part no.	Qty.

Order no.	
Clerk (code no.)	
Dept. code	

