




ORIGINAL INSTRUCTIONS

Instruction Manual
Auto switch (Solid state) - Diagnostic output
D-G59F# / D-F59F# / D-F79F# / D-H7NF#

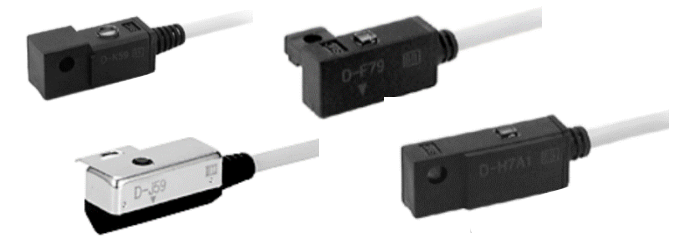

The intended use of the auto switch is to detect and control the position of an actuator using magnetic detection.

1 Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)^{*)}, and other safety regulations.

^{*)} ISO 4414: Pneumatic fluid power - General rules and safety requirements for systems and their components.
ISO 4413: Hydraulic fluid power - General rules and safety requirements for systems and their components.
IEC 60204-1: Safety of machinery - Electrical equipment of machines. Part 1: General requirements.
ISO 10218-1: Robotics - Safety requirements - Part 1: Industrial robots.

- Refer to product catalogue, Operation Manual and Handling Precautions for SMC Products for additional information.
- Keep this manual in a safe place for future reference.

	Danger	Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.
	Warning	Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
	Caution	Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

Warning

- **Always ensure compliance with relevant safety laws and standards.**
- All work must be carried out in a safe manner by a qualified person in compliance with applicable national regulations.
- This product is class A equipment intended for use in an industrial environment. There may be potential difficulties in ensuring electromagnetic compatibility in other environments due to conducted or radiated disturbances.
- Refer to the operation manual on the SMC website (URL: <https://www.smcworld.com>) for all Safety Instructions.

Warning


- Special products (-X or -####) might have specifications different from those shown in the Specifications section. Contact SMC for specific drawings.

2 Specifications


Switch part no.	D-G59F	D-F59F	D-F79F	D-H7NF
Wiring	4-wire			
Output	NPN			
Diagnostic output	Normal operation			
Applicable load	IC circuit / Relay / PLC			
Power supply voltage	5/12/24 VDC (4.5 to 28 VDC)			
Current consumption	10 mA or less			
Load voltage	28 VDC or less			
Load current	50 mA or less (during normal output and diagnostic output)			
Internal voltage drop	1.5 V or less (0.8 V or less at 5 mA)			
Current leakage	100 µA or less at 24 VDC			
Operating time	1 ms or less			
Indicator light	Operation: Red LED is ON Optimum position: Green LED is ON			
Electrical entry	Grommet			
Lead wire	Vinyl sheath cable φ4, 0.3 mm ² , 4-wire (D-G59F, D-F59F), φ3.4, 0.2 mm ² , 4-wire (D-F79F, D-H7NF)			
Impact proof	1000 m/s ²			
Insulation resistance	50 MΩ or more, test voltage 500 VDC (between case and cable)			
Withstand voltage	1000 VAC 1 min. (between case and cable)			
Ambient temperature	-10 to 60 °C			
Enclosure	IEC 60529 criteria IP67			
Standards	CE/UKCA marked			

3 Names of Individual parts


• D-G59F

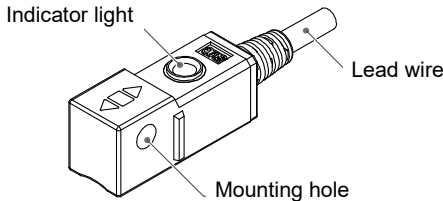


• D-F59F

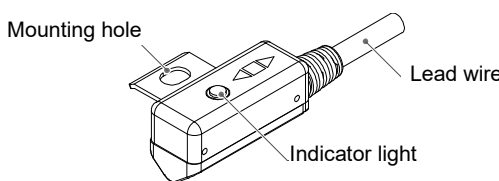

• D-F79F

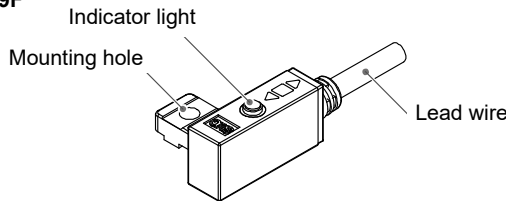

• D-H7NF

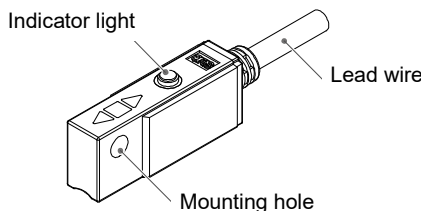

4 Installation

4.1 Installation

Warning

Do not install the product unless the safety instructions have been read and understood.

4.2 Design and Selection

- 1) Confirm the specifications. Read the specifications carefully and use the product correctly. The product may be damaged or malfunction if it is used outside of the specification range.
- 2) Take precautions when multiple actuators are used close together. When multiple auto switch actuators are used in close proximity, magnetic field interference may cause the switches to malfunction. Maintain a minimum actuator separation of 40 mm.
- 3) Pay attention to the length of time that a switch is ON at an intermediate stroke position. When an auto switch is placed at an intermediate position of the stroke and a load is driven at the time the piston passes, the auto switch will operate, but if the speed is too great the operating time will be short and the load may not operate correctly. The maximum detectable piston speed is:


$$V \text{ (mm/s)} = \frac{\text{Auto switch operating range (mm)}}{\text{Load operating time (ms)}} \times 1000$$

- 4) Keep wiring as short as possible. Although long wire length does not affect the switch function, it is recommended to keep it to 100 m or less.
- 5) Do not use a load that generates surge voltage. Although a surge protection diode is connected at the output side of a solid state auto switch, damage may still occur if the surge is applied repeatedly. When a load such as a relay or solenoid which generates surge is directly driven, use a type of switch with built in surge protection.
- 6) Caution for use in an interlock circuit. When an auto switch is used for an interlock signal requiring high reliability, devise a double interlock system by providing a mechanical protection function, or by using another switch (sensor) together with the auto switch.

- 7) Perform periodical maintenance and confirm proper operation. Ensure sufficient clearance for maintenance activities. When designing an application, be sure to allow sufficient clearance for maintenance and inspections.

4.3 Mounting and Adjustment

- 1) Do not drop or bump the product. Do not drop, bump or apply excessive impact (1000 m/s² or more) while handling. Although the body of the switch may not appear damaged, the inside of the switch could be damaged and cause a malfunction.
- 2) Do not carry an actuator by the auto switch lead wires. This may not only cause broken lead wires, but it may cause internal elements of the switch to be damaged by the stress.
- 3) Mount switches using the correct tightening torque. The tightening torque of the mounting screw is important. If a switch is tightened beyond the tightening torque range, the mounting screw, mounting bracket or switch may be damaged. On the other hand, tightening below the tightening torque range may allow the switch to slip out of position.
- 4) Mount a switch at the centre of the operating range. Adjust the auto switch mounting position so that the piston is at the centre of the operating range (the range in which the switch is ON). The mounting position shown in the catalogue indicates the optimum position at the end of stroke. If mounted at the end of the operating range (around the borderline of ON and OFF) operation may be unstable.
- 5) The auto switch ON and OFF position operates with a hysteresis. If the hysteresis causes a problem, please consult with SMC.

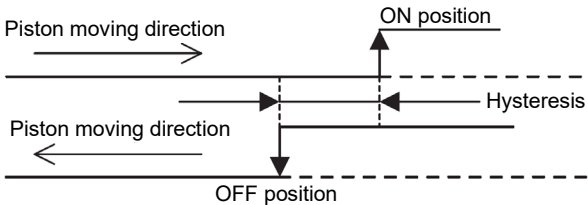


4 Installation (continued)

4.4 Mounting

Each actuator has a specified mounting bracket type. Mounting depends on the actuator type and bore size. Please refer to the actuator catalogue. For new auto switch applications, confirm that the actuator includes a built-in magnet before assembly, and prepare a mounting bracket corresponding to the actuator.


• D-G59F mounting

1. Place a mounting band around the cylinder tube and set it at the auto switch mounting position.
2. Position the mounting section of the auto switch between the band mounting holes and adjust the position of the switch to the holes.
3. Thread the auto switch mounting screw through the mounting hole into the threaded hole of the band fitting.
4. After confirming the detection position, tighten the mounting screw to secure the auto switch while contacting the auto switch base with the cylinder tube. The tightening torque of the M4 screw must be 1.0 to 1.2 N·m.
5. Modification of the detection position should be made according to step 3.

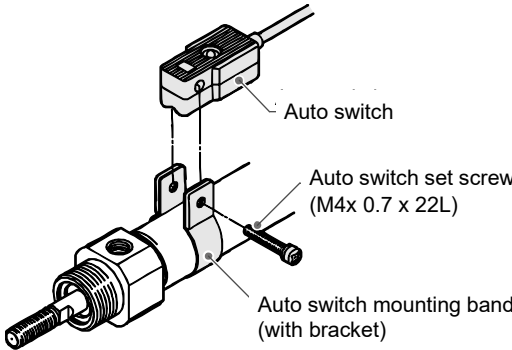

• D-F59F mounting

1. Place the auto switch on the auto switch mounting bracket using the auto switch mounting screw (M4) and install the set screws.
2. Fit the auto switch mounting bracket onto the cylinder tie-rod and then fix the auto switch at the detecting position using a hexagonal wrench. Make sure the base of the auto switch is in contact with the surface of the cylinder tube.
3. When changing the detecting position, loosen the set screws to move the auto switch and then re-fix the auto switch. Tightening torque of M4 screw must be 0.6 to 0.8 N·m.

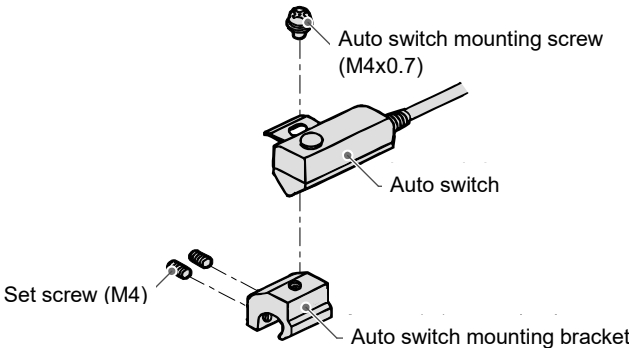


• D-F79F mounting

1. Slide the auto switch mounting nut inserted into the mounting rail and set it at the auto switch mounting position.
2. Fit the convex part of the auto switch mounting arm into the concave part of the auto switch mounting rail. Then slide the switch over the nut. (Auto switch spacer is required).
3. Push the auto switch mounting screw lightly into the mounting nut through the hole in the auto switch mounting arm.
4. After confirming the detecting position, tighten the mounting screw to secure the auto switch.

4 Installation (continued)

The tightening torque of M3 screw must be according to the table below.

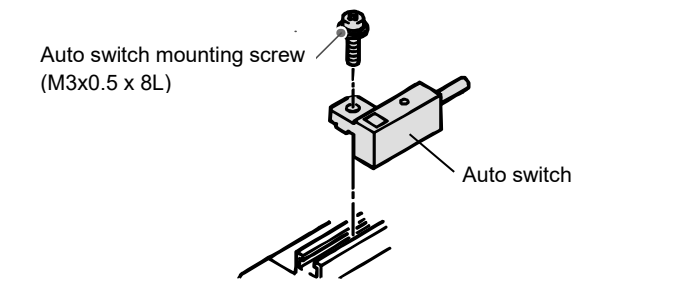


Cylinder series		Tightening torque
CDQP2B, CDBQ2, CDQ2X, CDLQ, CDQM, RDQ, RDLQ, RZQ, MK2T, CE1, CXT, MDU (other than Z), MDLU.		0.5 to 0.7 N•m
CDQ2, CDQ2Y, MK, RSDQ	For Ø12 to 25 mm	0.25 to 0.35 N•m
	For Ø32 to 160 mm	0.35 to 0.45 N•m

D-H7NF mounting

- For CDJ2 actuators: Place a mounting bracket on the cylinder tube.
For CDM2 actuators: Place the auto switch mounting band around the cylinder where the auto switch will be mounted (without bending the reinforcing plates).
- For CDJ2 actuators: Position the mounting section of the auto switch between the band mounting holes and adjust the position of the switch to the holes.
For CDM2 actuators: Hook the bent part of the auto switch mounting band reinforcing plates onto the upper surface of the switch bracket. Bend the base of the auto switch mounting band reinforcing plates until the through holes of the bracket, the through holes of the auto switch mounting band, and the M3 threaded hole are aligned. Adjust the switch bracket so that both ends of the auto switch mounting band are inserted into the inner walls on both sides of the switch bracket.

- Lightly thread the auto switch mounting screw through the mounting hole into the threaded hole in band fitting.
- After setting in the detecting position by sliding, tighten the mounting screw to secure the auto switch while making sure there is good contact between the auto switch base and the cylinder tube.
The tightening torque of M3 screw should be as follows:
For CDJ2 actuators, bracket BJ2-***: 0.8 to 1.0 N•m.
For CDM2 actuators, band BM2-***A or BMA2-***A: 0.6 to 0.7 N•m.

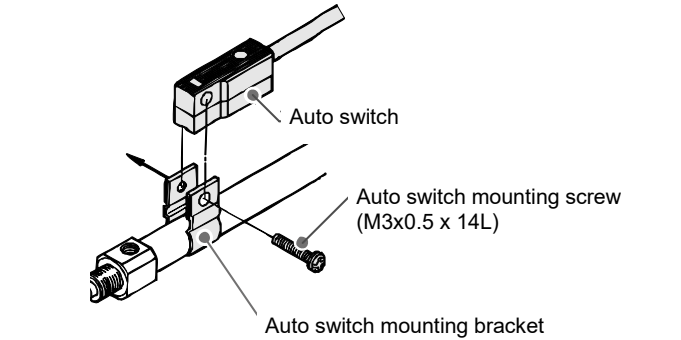

4.5 Setting the switch position

- Set the actuator at the stroke end.
- Set the auto switch in the position where the auto switch Green LED is ON (detecting position).

4 Installation (continued)

4.6 Environment

Warning


- Do not use in an environment where oil, corrosive gases, chemicals, salt water or steam are present.
- Do not install in a location subject to vibration or impact in excess of the product specifications.
- Do not mount in a location exposed to radiant heat that would result in temperatures in excess of the product specification.
- Do not use in an area where a magnetic field is generated. Auto switches can malfunction or magnets inside actuators can become demagnetized.
- Do not use in an environment where the auto switch will be continually exposed to water.
- Do not use in an environment with temperature cycles.
- Avoid accumulation of iron waste or close contact with magnetic substances. A large amount of accumulated iron waste such as machining chips or spatter may cause the auto switch to malfunction.

5 Wiring

5.1 Wiring

- Avoid repeatedly bending or stressing lead wires.
Broken lead wires can result from wiring layouts which repeatedly apply bending stress or stretching force to the lead wires.
- Confirm proper insulation of wiring.
Check that there is no faulty wiring insulation (contact with other circuits, ground fault, improper insulation between terminals, etc.) Damage may occur due to excess current flow into a switch.
- Do not route wiring with power lines or high voltage lines.
Avoid parallel wiring or wiring in the same conduit with these lines. Control circuits containing auto switches may malfunction due to noise.
- Do not allow short circuit of loads.
The auto switch does not have built-in short circuit protection. Note that if a load is short circuited, the switch will be instantly damaged because of excess current flow into the switch.
- Avoid incorrect wiring. If wiring is incorrect the switch will be damaged.

5.2 Wiring diagram

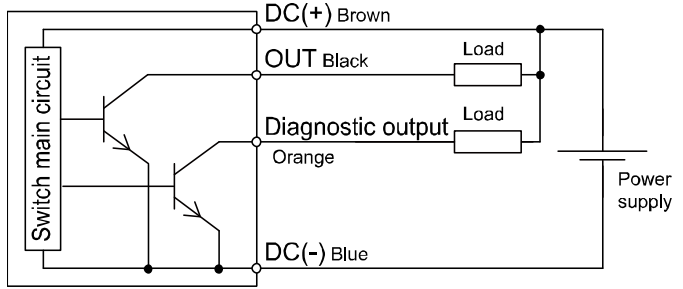

5.3 Auto switch with Pre-wired connector


Auto switches are available with pre-wired M8 or M12 connector. Refer to the "How to Order" information in the catalogue or operation manual on the SMC website (URL: <https://www.smcworld.com>) for details.

Connector pin assignment

D-****BPC	D-****DPC
M8 4-pin connector	M12 4-pin connector

6 Troubleshooting

When detection failure occurs check the switch based on the flow chart.

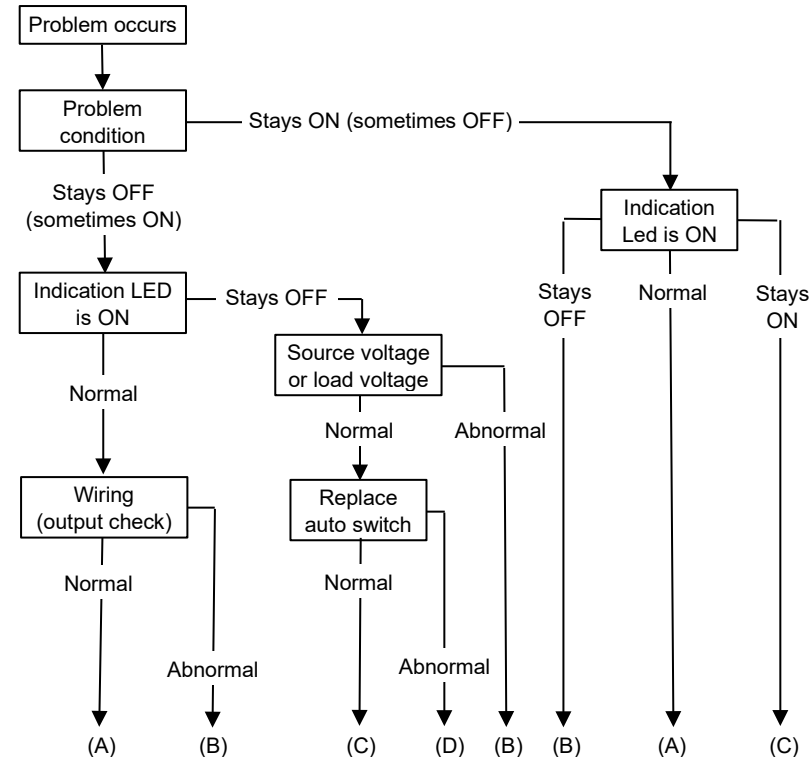

- (A) = Auto switch output failure (replace)
- (B) = Check wiring and correct fault
- (C) = Auto switch failure.
- (D) = Replace actuator. Detectable magnetic field inadequate (or no magnet)

7 Maintenance

7.1 General Maintenance

Caution

- Not following proper maintenance procedures could cause the product to malfunction and lead to equipment damage.
- If handled improperly, compressed air can be dangerous.
- Maintenance of pneumatic systems should be performed only by qualified personnel.
- Before performing maintenance, turn off the power supply and be sure to cut off the supply pressure. Confirm that the air is released to atmosphere.
- After installation and maintenance, apply operating pressure and power to the equipment and perform appropriate functional and leakage tests to make sure the equipment is installed correctly.
- If any electrical connections are disturbed during maintenance, ensure they are reconnected correctly and safety checks are carried out as required to ensure continued compliance with applicable national regulations.
- Do not make any modification to the product.
- Do not disassemble the product, unless required by installation or maintenance instructions.
- Perform the following maintenance periodically in order to prevent possible danger due to unexpected auto switch malfunction.
 - Securely tighten switch mounting screws. If screws become loose or the mounting position is dislocated, re-tighten them after readjusting the mounting position.
 - Confirm that there is no damage to lead wires. To prevent faulty insulation, replace switches or repair lead wires, etc., if damage is discovered.
- When the power has been disconnected, regarding the actuator operation set up, the contents of the program may be maintained by the customer application. Take care to confirm safety when the power is re-connected, and the actuator operation is resumed, because the operation may have stopped in an unstable condition.

8 How to Order

Refer to the catalogue or operation manual on the SMC website (URL: <https://www.smcworld.com>) for How to order information.

9 Outline dimensions

Refer to the catalogue or operation manual on the SMC website (URL: <https://www.smcworld.com>) for Outline dimensions.

10 Limitations of Use

10.1 Limited warranty and Disclaimer/Compliance Requirements
Refer to Handling Precautions for SMC Products.

11 Product disposal

This product should not be disposed of as municipal waste. Check your local regulations and guidelines to dispose of this product correctly, in order to reduce the impact on human health and the environment.

12 Contacts

Refer to www.smcworld.com or www.smc.eu for your local distributor / importer.

SMC Corporation

URL: <https://www.smcworld.com> (Global) <https://www.smceu.com> (Europe)
SMC Corporation, 1-5-5, Kyobashi, Chuo-ku, Tokyo 104-0031, JAPAN
Specifications are subject to change without prior notice from the manufacturer.
© SMC Corporation All Rights Reserved.
Template DKP50047-F-085O