

# Simple Specials: -XC14: Change of Trunnion Bracket Mounting Position

The following changes are dealt with through the Simple Specials System.  
Please contact your local sales representative for more details.


## 8 Change of Trunnion Bracket Mounting Position

Symbol

**-XC14**

The position for mounting the trunnion pivot bracket on the cylinder can be moved from the standard mounting position to any desired position.

Series	Description	Model	Action	Note
MB	Standard type	MB-Z	Double acting, Single rod	
		MBW-Z	Double acting, Double rod	
	Non-rotating rod type	MBK-Z	Double acting, Single rod	
	End lock cylinder	MBB	Double acting, Single rod	
	Smooth cylinder	MBY-Z	Double acting, Single rod	
CA2	Standard type	CA2-Z	Double acting, Single rod	
		CA2W-Z	Double acting, Double rod	
	Non-rotating rod type	CA2K	Double acting, Single rod	Applicable to ø40 to ø63
		CA2KW	Double acting, Double rod	Applicable to ø40 to ø63
	End lock cylinder	CBA2	Double acting, Single rod	
	Air-hydro cylinder	CA2H	Double acting, Single rod	
CS1	Standard type	CS1	Double acting, Single rod	
		CS1W	Double acting, Double rod	
CS2	Standard type	CS1□Q	Double acting, Single rod	Applicable to ø125 to ø160
		CS2	Double acting, Single rod	
		CS2-V	Double acting, Double rod	
CS2	Long stroke	CS2-P	Double acting, Single rod	Applicable to ø180 to ø320
		CS2□P	Double acting, Single rod	Applicable to ø180 to ø250
MWB	Smooth cylinder	CS2Y	Double acting, Single rod	Applicable to ø125 to ø160
		MWB	Double acting, Single rod	
CNA2	Cylinder with lock	MWBW	Double acting, Double rod	
		CNA2	Double acting, Single rod	
CNS	Cylinder with lock	CNA2W	Double acting, Double rod	
		CNS	Double acting, Single rod	
CLS	Cylinder with lock	CLS	Double acting, Single rod	
CL1	Lock-up cylinder	CL1	Double acting, Single rod	Applicable to ø40 to ø100
CVS1	Valve mounted cylinder	CVS1	Double acting, Single rod	
		CVS1K	Double acting, Single rod	Applicable to ø40 to ø63

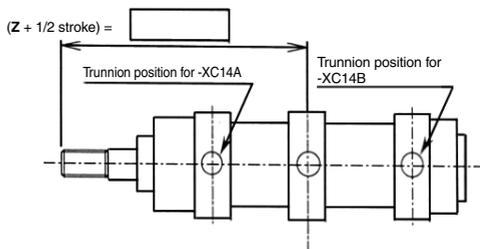

### ⚠ Precautions

- Specify "Z + 1/2 stroke" in the case the trunnion bracket position is not -XC14A, B or trunnion is not a center trunnion.
- SMC will make appropriate arrangements if no dimension, tolerance, or finish instructions are given in the diagram.
- The possible range of trunnion bracket mounting position is indicated in the table below.
- Some trunnion mounting positions do not allow auto switch mounting. Please consult with SMC for more information.
- When the trunnion position is changed to somewhere close to the cover for the end lock cylinder, there is a possibility that the lock part and the trunnion pivot bracket may interfere with each other. Change the lock position (-X3) at the same time.
- The CS2 series has a greater range of trunnion bracket mounting positions than CS1 series, so the value of "Z + 1/2 stroke" at -XC14A and -XC14B is different.

### MB Series

Bore size (mm)	Symbol	Z + 1/2 stroke (mm)					
		For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum		
32		82.5	95.5 + Stroke	84	94 + Stroke	89 + 1/2 stroke	1
40		89	97 + Stroke	90	96 + Stroke	93 + 1/2 stroke	1
50		100.5	109.5 + Stroke	102	108 + Stroke	105 + 1/2 stroke	1
63		103.5	106.5 + Stroke	105	105 + Stroke	105 + 1/2 stroke	1
80		127	131 + Stroke	128	130 + Stroke	129 + 1/2 stroke	1
100		130	128 + Stroke	131	127 + Stroke	129 + 1/2 stroke	1
125		160	154 + Stroke	160.5	153.5 + Stroke	157 + 1/2 stroke	1

### CA2/CBA2/CVS1 Series

Bore size (mm)	Symbol	Z + 1/2 stroke (mm)					
		For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum		
40		89	97 + Stroke	89.5	96.5 + Stroke	93 + 1/2 stroke	1
50		99	107 + Stroke	99.5	106.5 + Stroke	103 + 1/2 stroke	1
63		103	111 + Stroke	103.5	110.5 + Stroke	107 + 1/2 stroke	1
80		125	133 + Stroke	125.5	132.5 + Stroke	129 + 1/2 stroke	1
100		132	138 + Stroke	132.5	137.5 + Stroke	135 + 1/2 stroke	1

### CS1 Series

Bore size (mm)	Symbol	Z + 1/2 stroke (mm)					
		For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum		
125		170	148 + Stroke	170.5	147.5 + Stroke	159 + 1/2 stroke	25
140		172.5	145.5 + Stroke	173	145 + Stroke	159 + 1/2 stroke	30
160		189	157 + Stroke	189.5	156.5 + Stroke	173 + 1/2 stroke	35
180		203.5	177.5 + Stroke	204	177 + Stroke	190.5 + 1/2 stroke	30
200		203.5	177.5 + Stroke	204	177 + Stroke	190.5 + 1/2 stroke	30
250		243.5	217.5 + Stroke	244	217 + Stroke	230.5 + 1/2 stroke	30
300		263.5	232.5 + Stroke	264	232 + Stroke	248 + 1/2 stroke	35

# Simple Specials: -XC14: Change of Trunnion Bracket Mounting Position

The following changes are dealt with through the Simple Specials System.  
Please contact your local sales representative for more details.

## 8 Change of Trunnion Bracket Mounting Position

Symbol

**-XC14**

### CS2 Series

(mm)

Bore size (mm)	Symbol		Z + 1/2 x Stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
125	165.5	152.5 + Stroke	166	152 + Stroke	159 + 1/2 x Stroke	25
140	168	150 + Stroke	168.5	149.5 + Stroke	159 + 1/2 x Stroke	30
160	186	160 + Stroke	186.5	159.5 + Stroke	173 + 1/2 x Stroke	35
180	200	185 + Stroke	200.5	184.5 + Stroke	192.5 + 1/2 x Stroke	25
200	200	190 + Stroke	200.5	189.5 + Stroke	195 + 1/2 x Stroke	25
250	240	221 + Stroke	240.5	220.5 + Stroke	230.5 + 1/2 x Stroke	25
320	264.5	260.5 + Stroke	265	260 + Stroke	262.5 + 1/2 x Stroke	35

### MWB Series (Double acting, Single rod/Double rod common/Air cushion type)

(mm)

Bore size (mm)	Symbol		Z + 1/2 stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
32	141.5	154.5 + Stroke	143	153 + Stroke	148 + 1/2 stroke	1
40	162	170 + Stroke	163	169 + Stroke	166 + 1/2 stroke	1
50	178.5	187.5 + Stroke	180	186 + Stroke	183 + 1/2 stroke	1
63	193.5	196.5 + Stroke	195	195 + Stroke	195 + 1/2 stroke	1
80	240	244 + Stroke	241	243 + Stroke	242 + 1/2 stroke	1
100	263	261 + Stroke	264	260 + Stroke	262 + 1/2 stroke	3

Bore size (mm)	Symbol		Z + 1/2 stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
32	94.5 + h	107.5 + h + Stroke	96 + h	106 + h + Stroke	101 + h + 1/2 stroke	1
40	111 + h	119 + h + Stroke	112 + h	118 + h + Stroke	115 + h + 1/2 stroke	1
50	120.5 + h	129.5 + h + Stroke	122 + h	128 + h + Stroke	125 + h + 1/2 stroke	1
63	135.5 + h	138.5 + h + Stroke	137 + h	137 + h + Stroke	137 + h + 1/2 stroke	1
80	168 + h	172 + h + Stroke	169 + h	171 + h + Stroke	170 + h + 1/2 stroke	1
100	191 + h	189 + h + Stroke	192 + h	188 + h + Stroke	190 + h + 1/2 stroke	3

### MWB Series (Double acting, Single rod/Double rod common/Rubber bumper type)

(mm)

Bore size (mm)	Symbol		Z + 1/2 stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
32	141.5	160.5 + Stroke	143	159 + Stroke	151 + 1/2 stroke	1
40	162	176 + Stroke	163	175 + Stroke	169 + 1/2 stroke	1
50	178.5	195.5 + Stroke	180	194 + Stroke	187 + 1/2 stroke	1
63	193.5	204.5 + Stroke	195	203 + Stroke	199 + 1/2 stroke	1
80	240	254 + Stroke	241	253 + Stroke	247 + 1/2 stroke	1
100	263	271 + Stroke	264	270 + Stroke	267 + 1/2 stroke	1

Bore size (mm)	Symbol		Z + 1/2 stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
32	94.5 + h	113.5 + h + Stroke	96 + h	112 + h + Stroke	104 + h + 1/2 stroke	1
40	111 + h	125 + h + Stroke	112 + h	124 + h + Stroke	118 + h + 1/2 stroke	1
50	120.5 + h	137.5 + h + Stroke	122 + h	136 + h + Stroke	129 + h + 1/2 stroke	1
63	135.5 + h	146.5 + h + Stroke	137 + h	145 + h + Stroke	141 + h + 1/2 stroke	1
80	168 + h	182 + h + Stroke	169 + h	181 + h + Stroke	175 + h + 1/2 stroke	1
100	191 + h	199 + h + Stroke	192 + h	198 + h + Stroke	195 + h + 1/2 stroke	1

### CNA2 Series

(mm)

Bore size (mm)	Symbol		Z + 1/2 stroke			
	For -XC14A	For -XC14B	For -XC14		Reference Standard (Center trunnion)	Minimum stroke
			Minimum	Maximum		
40	158	166 + Stroke	158.5	165.5 + Stroke	162 + 0.5 stroke	25
50	177	185 + Stroke	177.5	184.5 + Stroke	181 + 0.5 stroke	25
63	187	195 + Stroke	187.5	194.5 + Stroke	191 + 0.5 stroke	32
80	227	235 + Stroke	227.5	234.5 + Stroke	231 + 0.5 stroke	41
100	252	258 + Stroke	252.5	257.5 + Stroke	255 + 0.5 stroke	45

# Simple Specials: -XC14: Change of Trunnion Bracket Mounting Position

The following changes are dealt with through the Simple Specials System.  
Please contact your local sales representative for more details.

## 8 Change of Trunnion Bracket Mounting Position

Symbol

**-XC14**

### CNS Series

Symbol		Z + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
125		375		353 + Stroke		375.5	352.5 + Stroke	364 + 0.5 stroke	25
140		417.5		390.5 + Stroke		418	390 + Stroke	404 + 0.5 stroke	30
160		479		447 + Stroke		479.5	446.5 + Stroke	463 + 0.5 stroke	35

Symbol		Z + $\ell$ + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
125		398 + $\ell$		376 + $\ell$ + Stroke		398.5 + $\ell$	375.5 + $\ell$ + Stroke	387 + $\ell$ + 1/2 stroke	30
140		440.5 + $\ell$		413.5 + $\ell$ + Stroke		441 + $\ell$	413 + $\ell$ + Stroke	427 + $\ell$ + 1/2 stroke	30
160		500 + $\ell$		468 + $\ell$ + Stroke		500.5 + $\ell$	467.5 + $\ell$ + Stroke	484 + $\ell$ + 1/2 stroke	35

### CLS Series

Symbol		Z + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
125		280		258 + Stroke		280.5	257.5 + Stroke	269 + 0.5 stroke	25
140		282.5		255.5 + Stroke		283	255 + Stroke	269 + 0.5 stroke	30
160		321		289 + Stroke		321.5	288.5 + Stroke	305 + 0.5 stroke	35

Symbol		Z + $\ell$ + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
125		303 + 0.2 stroke		281 + 1.2 stroke		303.5 + 0.2 stroke	280.5 + 1.2 stroke	292 + 0.7 stroke	25
140		305.5 + 0.2 stroke		278.5 + 1.2 stroke		306 + 0.2 stroke	278 + 1.2 stroke	292 + 0.7 stroke	30
160		345 + 0.2 stroke		310 + 1.2 stroke		345.5 + 0.2 stroke	309.5 + 1.2 stroke	326 + 0.7 stroke	35

### CL1 Series

Symbol		Z + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
40		158		166 + Stroke		158.5	165.5 + Stroke	162 + 1/2 stroke	—
50		177		185 + Stroke		177.5	184.5 + Stroke	181 + 1/2 stroke	—
63		187		195 + Stroke		187.5	194.5 + Stroke	191 + 1/2 stroke	—
80		217		225 + Stroke		217.5	224.5 + Stroke	221 + 1/2 stroke	—
100		232		238 + Stroke		232.5	237.5 + Stroke	235 + 1/2 stroke	—

Symbol		Z + $\ell$ + 1/2 stroke							
Bore size (mm)		For -XC14A		For -XC14B		Without rod boot			
						For -XC14		Reference Standard (Center trunnion)	Minimum stroke
				Minimum	Maximum				
40		166 + $\ell$		174 + $\ell$ + Stroke		166.5 + $\ell$	173.5 + $\ell$ + Stroke	170 + $\ell$ + 1/2 stroke	20
50		185 + $\ell$		193 + $\ell$ + Stroke		185.5 + $\ell$	192.5 + $\ell$ + Stroke	189 + $\ell$ + 1/2 stroke	20
63		195 + $\ell$		203 + $\ell$ + Stroke		195.5 + $\ell$	202.5 + $\ell$ + Stroke	199 + $\ell$ + 1/2 stroke	20
80		226 + $\ell$		234 + $\ell$ + Stroke		226.5 + $\ell$	233.5 + $\ell$ + Stroke	230 + $\ell$ + 1/2 stroke	20
100		241 + $\ell$		247 + $\ell$ + Stroke		241.5 + $\ell$	246.5 + $\ell$ + Stroke	244 + $\ell$ + 1/2 stroke	20