

Made to Order Common Specifications: -XC26: With Split Pins for Double Clevis Pin and Double Knuckle Joint Pin and Flat Washers



32 With Split Pins for Double Clevis Pin/Double Knuckle Joint Pin and Flat Washers -XC26

Flat washer is added for the double clevis (one of the mounting types) or double knuckle joint (one of the accessories).

Applicable Series


Series	Description	Model	Action	Note	Vol. no. (for std model)
MB	Air cylinder	MB	Double acting, Single rod	ø125 only	Web Catalog
MB1	Air cylinder	MB1	Double acting, Single rod	ø125 only	
		MB1W	Double acting, Double rod	ø125 only	
CS2	Standard type	CS2-Z	Double acting, Single rod		
	Smooth cylinder	CS2Y-Z	Double acting, Single rod		

Specifications

Mounting type	Only double clevis type (D), Double knuckle joint
Changed parts	Clevis pin, knuckle joint pin, flat washer
Specifications other than above	Same as standard type

Dimensions (Dimensions other than below are the same as standard type.)


Double clevis



- * For mounting bracket, split pin, clevis pin and flat washer are shipped together, (but not assembled).
- * Mounting method is the same as standard type.

Bore size (mm)	CW
ø125	90
ø140	104
ø160	113

Double knuckle joint




- * For mounting bracket, split pin, knuckle joint pin and flat washer are shipped together, (but not assembled).
- * Mounting method is the same as standard type.


Bore size (mm)	L
ø125	90
ø140	104
ø160	113

How to Order

• Product

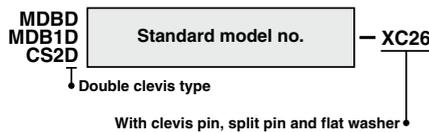

• Parts assembly

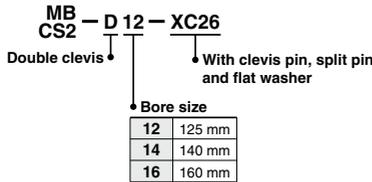

Made to Order Common Specifications: -XC26: With Split Pins for Double Clevis Pin and Double Knuckle Joint Pin and Flat Washers



32 With Split Pins for Double Clevis Pin/Double Knuckle Joint Pin and Flat Washers -XC26

A pin for double clevis (one of the mounting types) or double knuckle joint (one of the accessories) has been changed for a split pin, and split pins and flat washers have been added.

Applicable Series



Series	Model	Action	Note	Vol. no. (for std model)
CQS	Standard	CQS	Double acting, Single rod Single acting (Spring return/stand)	Web Catalog
	Long stroke	CQS	Double acting, Single rod	
	Non-rotating rod	CQSK	Double acting, Single rod	
	Anti-lateral load	CQS□S	Double acting, Single rod	
CQ2	Compact cylinder	CQ2	Double acting, Single rod Single acting (Spring return/stand)	
	Long stroke	CQ2	Double acting, Single rod	
	Non-rotating rod	CQ2K	Double acting, Single rod	
	Anti-lateral load	CQ2□S	Double acting, Single rod	
	With end lock	CBQ2	Double acting, Single rod	

Specifications



Mounting	Double clevis (D) only
Changed parts	Clevis pin/Knuckle pin, Split pin, Flat washer
Specifications other than above	Same as standard

How to Order

● Product




● Parts assembly

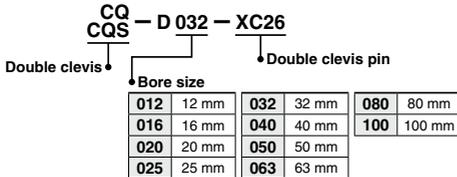


* For the CQS, only bore sizes 012 to 025 are selectable.

Dimensions (Dimensions other than those below are the same as those of the standard type.)


Double clevis



Double knuckle joint



Clevis pin/Knuckle joint pin



* Body mounting bolts, pin, split pins, and flat washers are included.

* A pin, split pins, and flat washers are included.

* Split pins and flat washers are included.

Bore size (mm)	Double clevis	Double knuckle joint	Clevis pin Knuckle joint pin	L (mm)
12	CQ-D012-XC26	Y-G012-XC26	IY-G012-XC26	21
16	CQ-D016-XC26	Y-Z015A-XC26	IY-J015-XC26	23
20	CQ-D020-XC26	Y-G02-XC26	IY-G02-XC26	31
25	CQ-D025-XC26	Y-G03-XC26	IY-G03-XC26	36.5
32	CQ-D032-XC26			
40	CQ-D040-XC26	Y-G04-XC26	IY-G04-XC26	52.5

Bore size (mm)	Double clevis	Double knuckle joint	Clevis pin Knuckle joint pin	L (mm)
50	CQ-D050-XC26			
63	CQ-D063-XC26	Y-G05-XC26	IY-G05-XC26	66
80	CQ-D080-XC26	Y-G08-XC26	IY-G08-XC26	78
100	CQ-D100-XC26	Y-G10-XC26	IY-G10-XC26	86