

The JXC□4-X1 simple controller is to be discontinued as of the end of March 2025. Select the JXD1-M□ series manifold controller instead. [Click here for details.](#)

**For 4 Axes**

# Simple Controller




**End to end**  
**2-point operation is possible without programming!**

- Reduced setting labor**  
Only the speed and force need to be set
- Reduced wiring labor**  
Only 2 inputs/outputs\*1  
\*1 Per axis
- Space saving**




**Footprint** Reduced by up to approx. **79%**

Single-axis controller (LECP6) x 4 controllers

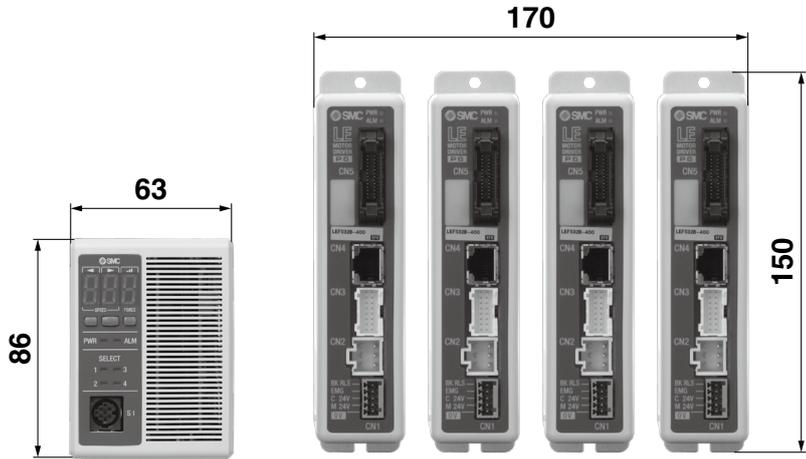


**Footprint** Reduced by up to **73%**

4-axis controller (JXC73/83/93)

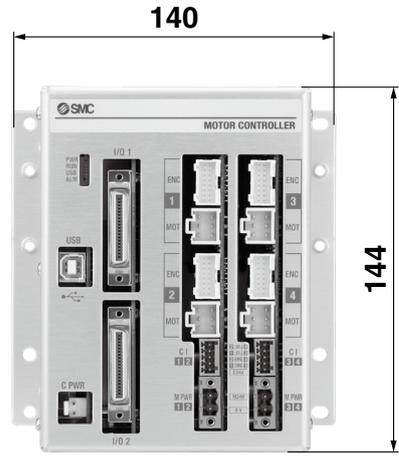


- Applicable actuator**  
**LEY Series**  
 Size 16, 25

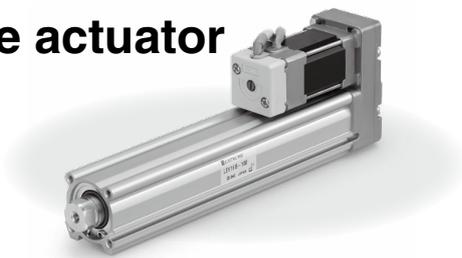

**JXC□4-X1**




## System Construction

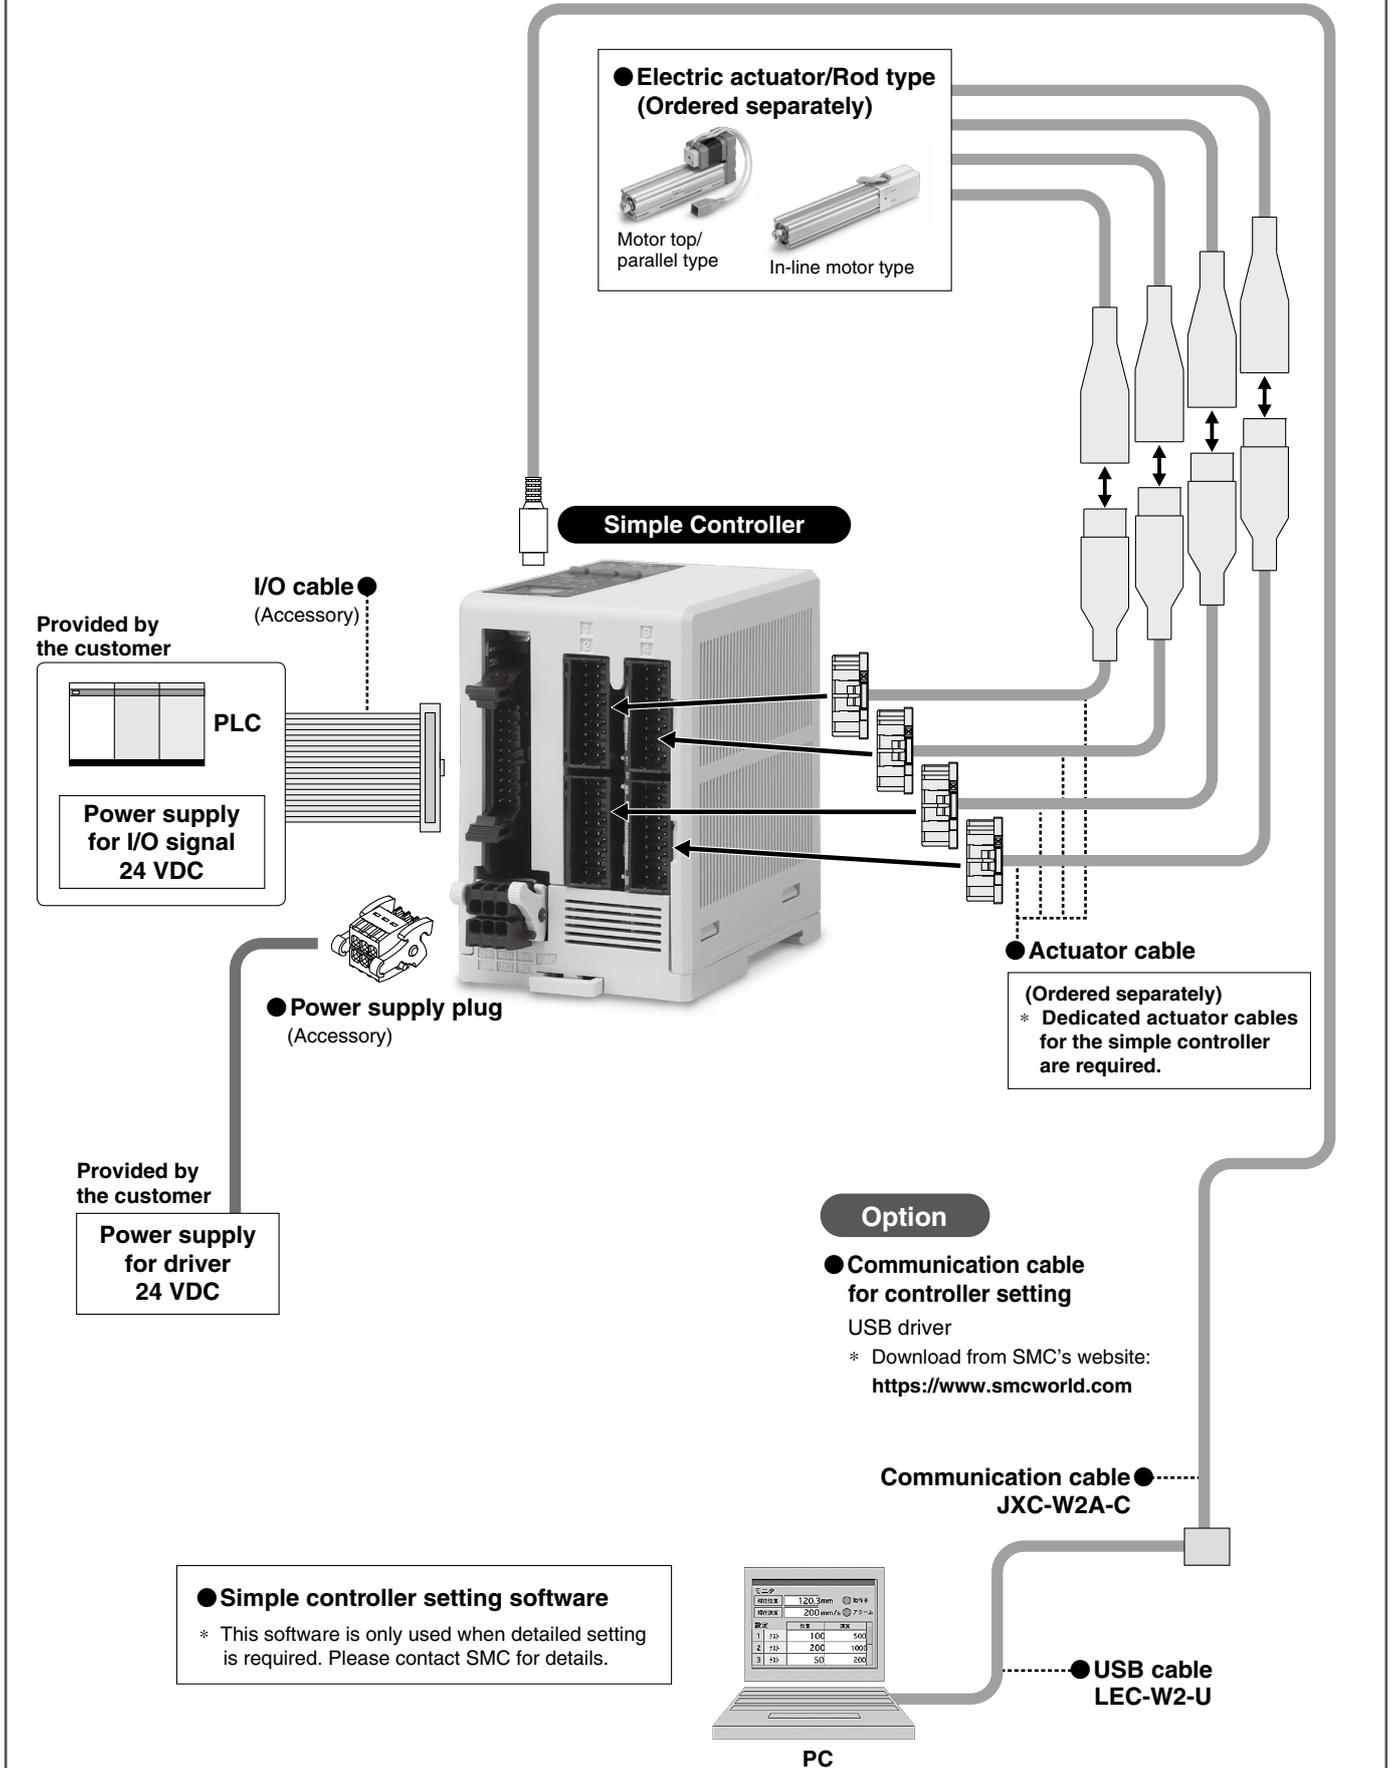

## Specifications

Model	JXC□4-X1
Number of axes	4 axes
Compatible motor	Step motor (Servo/24 VDC) □42/□28/□20
Power supply	Power voltage: 24 VDC ±10%
Power consumption	Power consumption depends on the actuator size connected. Refer to the actuator specifications for further details.
Operating temperature range	0 to 55°C (No freezing)
Operating humidity range	90% or less (No condensation)
Enclosure	IP10
Insulation resistance	Between all external terminals and the case 50 MΩ (500 VDC)
Weight	300 g (DIN rail mounting), 390 g (Screw mounting)
Applicable actuator	<b>LEY Series</b> (Size 16, 25 * Excluding the LEYG)

## Dimensions

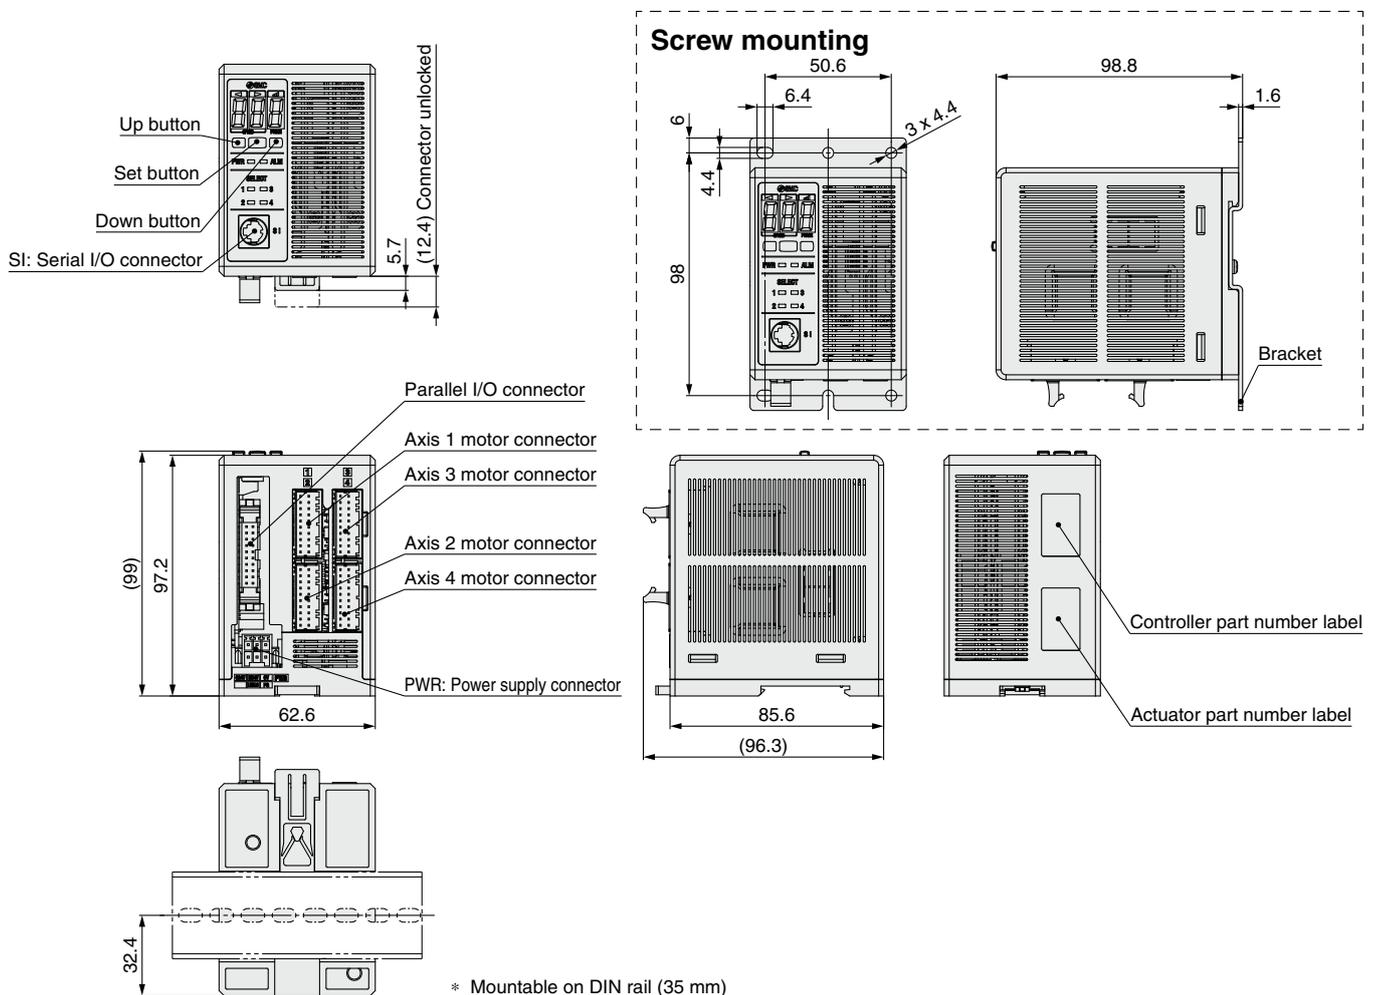

**⚠ Safety Instructions** Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

## SMC Corporation

Akihabara UDX 15F,  
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN  
Phone: 03-5207-8249 Fax: 03-5298-5362  
<https://www.smcworld.com>  
© 2020 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.