

Stainless Steel 316 One-touch Fittings

Series KQG

- Material

Metal parts: **Stainless steel 316**

Seal parts: **Special FKM**

- Grease-free

- Fluid temperature


-5 to 150°C

- Can be used with steam.




- Applicable tubing material
 - FEP, PFA, Nylon, Soft nylon, Polyurethane
 - Polyolefin

All stainless steel 316 except seal parts



Seal parts
(Special FKM)

Male connector



Seal parts
(Special FKM)

Male elbow

- Certified to meet current Food Sanitation Law standards.

(Component materials have met apparatuses and container-packages standards, based on Directive 85 of the Japanese Ministry of Health and Safety in 1986.)

Stainless Steel 316 One-touch Fittings

Applicable tubing: Metric size/Connection thread: M, R

Series KQG

RoHS



Applicable Tubing

Tubing material	FEP, PFA, Nylon, Soft nylon ^{Note 1)} , Polyurethane ^{Note 2) Note 3)} , Polyolefin
Tubing O.D.	ø4, ø6, ø8, ø10, ø12

Specifications

Fluid	Air, Water, Steam ^{Note 3) Note 4)}
Operating pressure range ^{Note 5)}	-100 kPa to 1 MPa
Proof pressure	3.0 MPa
Ambient and fluid temperature ^{Note 6)}	-5 to 150°C (No freezing)
Lubricant	Grease-free specification
Seal on the threads	With sealant

Note 1) For soft nylon tubing, water cannot be used.

Note 2) The pulling strength of polyurethane tube is as follows. The pulling load of the tube used for verifying the mounting of the tube within the fitting should be the values as shown or less in the table below. As reference, the thrust force occurring between the tube and the fitting at 0.8 MPa is shown on the table below.

Pulling Strength

Model	TU0425	TU0604	TU0805	TU1065	TU1208
Without inner sleeve	50 N	80 N	110 N	140 N	140 N
With inner sleeve	160 N	180 N	250 N	450 N	500 N

Reference: Thrust Force Occurring at 0.8 MPa

Model	TU0425	TU0604	TU0805	TU1065	TU1208
Load	10 N	25 N	40 N	65 N	90 N

Note 3) Please consult with SMC regarding applicable tube separately.

Note 4) Special FKM that is resistant even when steam is used.

Note 5) Please avoid using in a vacuum holding application such as a leak tester, since there is leakage.

Note 6) It is recommended that you use the inner sleeve in the following conditions:

- When using in an environment where the fluid temperature changes drastically.
- When using at a high temperature.

Temperature Conditions

Operating tube	Temperature
FEP tubing/TH series	80°C or more
PFA tubing/TL series	120°C or more


Spare Parts

Description	Model	Material
Gasket	M-5G3	Stainless steel 316, Special FKM
Bulkhead nut	KQG04-P01	Stainless steel 316
	KQG06-P01	
	KQG08-P01	
	KQG10-P01	
	KQG12-P01	

Tube size		Tubing model (Material)				Applicable inner sleeve	
O.D.	Model	TU (Polyurethane)	TUS (Soft polyurethane)	TH (FEP)	TL (PFA)	Model	Length (mm)
ø4	0402	—	—	●	—	TJG-0402	18
	0425	●	●	●	—	TJG-0425	18
	0403	—	—	—	●	TJG-0403	18
ø6	0604	●	●	●	●	TJG-0604	19
	0805	●	●	—	—	TJG-0805	20.5
	0806	—	—	●	●	TJG-0806	20.5
ø8	1065	●	●	—	—	TJG-1065	23
	1075	—	—	●	—	TJG-1075	23
	1008	—	—	●	●	TJG-1008	23
	1208	●	●	—	—	TJG-1208	24
	1209	—	—	●	—	TJG-1209	24
ø12	1210	—	—	●	●	TJG-1210	24

* Material for the TJG series is stainless steel 316.

Construction

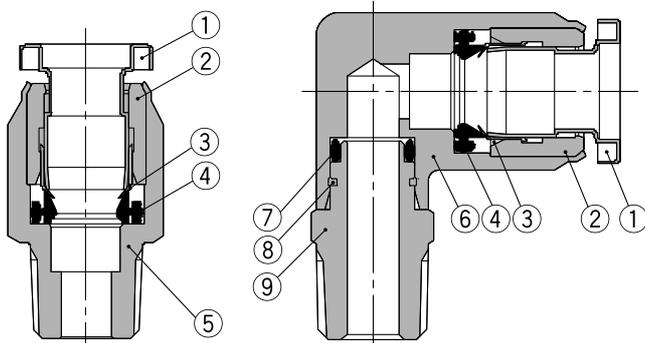

No.	Description	Material
1	Release bushing	Stainless steel 316
2	Guide	Stainless steel 316
3	Chuck	Stainless steel 316
4	Seal	Special FKM (Fluoro coated)
5	Male connector body	Stainless steel 316
6	Male elbow body	Stainless steel 316
7	O-ring	Special FKM (Fluoro coated)
8	Stopper ring	Stainless steel 316
9	Stud	Stainless steel 316

Stainless Steel 316 One-touch Fittings **Series KQG**

Applicable tubing: Metric size/Connection thread: M, R


Dimensions

Male Connector: KQGH




Applicable tubing O.D. (mm)	Connection thread R	Model	H (Width across flats)	Note 1) ϕD	L	A*	M	Effective area (mm ²) ^{Note 2)}	Mass (g)
$\phi 4$	M5 x 0.8	KQGH04-M5	10	10	22.3	19.3	18	4	7.4
	1/8	KQGH04-01S			24	20		5.6	9.4
$\phi 6$	M5 x 0.8	KQGH06-M5	12	12	24.1	21.1	18.8	4	11
	1/8	KQGH06-01S			24.3	20.3		10.4	11
	1/4	KQGH06-02S			25.8	19.8		18	
$\phi 8$	1/8	KQGH08-01S	14	14	30.5	26.5	20.9	26.1	18
	1/4	KQGH08-02S			28.5	22.5		18	
$\phi 10$	1/4	KQGH10-02S	17	17	35.5	29.5	23	41.5	29
	3/8	KQGH10-03S			31	24.7		29	
$\phi 12$	3/8	KQGH12-03S	19	19	32.8	26.5	24.8	58.3	31
	1/2	KQGH12-04S			24.6	51			

(In case of M5)



(In case of R)




* Reference dimensions after installation of R thread
Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Hexagon Socket Head Male Connector: KQGS




Applicable tubing O.D. (mm)	Connection thread R	Model	H (Width across flats)	Note 1) ϕD	L	A*	M	Effective area (mm ²) ^{Note 2)}	Mass (g)
$\phi 4$	M5 x 0.8	KQGS04-M5	2	10	25	22	18	4	8.6
	1/8	KQGS04-01S	3			21		4.1	9.8
$\phi 6$	M5 x 0.8	KQGS06-M5	2	12	25.8	22.8	18.8	4	12
	1/8	KQGS06-01S	4			21.8		9.9	12
	1/4	KQGS06-02S				19.8		10	20
$\phi 8$	1/8	KQGS08-01S	5	14	30.5	26.5	20.9	17.2	17
	1/4	KQGS08-02S	6		28.5	22.5		18	
$\phi 10$	1/4	KQGS10-02S	8	17	35.5	29.5	23	39	28
	3/8	KQGS10-03S			31	24.7		29	
$\phi 12$	3/8	KQGS12-03S	10	19	32.8	26.5	24.8	60	30
	1/2	KQGS12-04S		22					24.6

(In case of M5)



(In case of R)




* Reference dimensions after installation of R thread
Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Straight Union: KQGH



Applicable tubing O.D. (mm)	Model	Note 1) ϕD	L	M	Effective area (mm ²) ^{Note 2)}	Mass (g)
$\phi 4$	KQGH04-00	11	37	18	5.6	16
$\phi 6$	KQGH06-00	13	38	18.5	13.1	22
$\phi 8$	KQGH08-00	15	42.8	20.9	26.1	31
$\phi 10$	KQGH10-00	19	47	23	41.5	54
$\phi 12$	KQGH12-00	21	50.6	24.8	58.3	66




Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Male Elbow: KQGL




Applicable tubing O.D. (mm)	Connection thread R	Model	H (Width across flats)	Note 1) ϕD	L ₁	L ₂	A*	M	Effective area (mm ²) ^{Note 2)}	Mass (g)	
$\phi 4$	M5 x 0.8	KQGL04-M5	10	10.6	20.5	16	18.3	18	3.5	18	
	1/8	KQGL04-01S				19.5	20.8		4.2	20	
$\phi 6$	M5 x 0.8	KQGL06-M5	12	12	22.1	17	20.5	18.8	3.5	25	
	1/8	KQGL06-01S				14	20.5		23	9	26
	1/4	KQGL06-02S					24.5		25	35	
$\phi 8$	1/8	KQGL08-01S	12	15	24.9	21.9	25.4	20.9	21.6	37	
	1/4	KQGL08-02S	14			25.9	27.4		45		
$\phi 10$	3/8	KQGL08-03S	17	17	27.8	27.9	29.1	23	35.2	56	
	1/4	KQGL10-02S				27.7	30.7		69		
$\phi 12$	3/8	KQGL10-03S	19	19	31.3	29.7	32.4	24.8	50.2	73	
	1/2	KQGL12-04S				30.7	35.1		94		
			22			34.7	37.2			121	

(In case of M5)



(In case of R)



* Reference dimensions after installation of R thread
Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing


Series KQG

Dimensions

Union Elbow: KQGL



Applicable tubing O.D. (mm)	Model	Note 1) ϕD	L	A	Q ₁	Q ₂	M	ϕN	Effective area ^{Note 2)} (mm ²)	Mass (g)
$\phi 4$	KQGL04-00	10.6	20.6	27.3	2.3	3.7	18	3.2	4.2	21
$\phi 6$	KQGL06-00	13	22.4	28.9	3.5	3.5	18.8		9	32
$\phi 8$	KQGL08-00	15	25.5	35.1				5	5.6	20.9
$\phi 10$	KQGL10-00	18	28.6	38.2	6.4	6.4	24.8			
$\phi 12$	KQGL12-00	20.8	31.4	41.8						




Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Male Branch Tee: KQGT




Applicable tubing O.D. (mm)	Connection thread R	Model	H (Width across flats)	Note 1) ϕD	L ₁	L ₂	A*	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
$\phi 4$	M5 x 0.8	KQGT04-M5	10	10.6	20.5	18	23.1	18	4.5	26
	1/8	KQGT04-01S				21.5	25.6		6	27
$\phi 6$	M5 x 0.8	KQGT06-M5		13	22.1	19	25	18.8	4.5	39
	1/8	KQGT06-01S				22.5	27.5		11	41
	1/4	KQGT06-02S	14		26.5	29.5		50		
	1/8	KQGT08-01S	12		23.9	30.7		61		
$\phi 8$	1/4	KQGT08-02S	14	15	24.9	27.9	32.7	20.9	26.3	70
	3/8	KQGT08-03S				29.9	34.4			83
	1/4	KQGT10-02S	17			29.7	35.7			23
3/8	KQGT10-03S		31.7	37.4	101					
$\phi 10$	3/8	KQGT12-03S		20.8	31.3	32.7	39.5	24.8	57.2	133
	1/2	KQGT12-04S	22			36.7	41.6			159

(In case of M5)



(In case of R)




* Reference dimensions after installation of R thread
Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Union Tee: KQGT



Applicable tubing O.D. (mm)	Model	Note 1) ϕD	L	A	Q	M	ϕN	Effective area ^{Note 2)} (mm ²)	Mass (g)
$\phi 4$	KQGT04-00	10.6	20.6	28.7	4.1	18	3.2	6.4	28
$\phi 6$	KQGT06-00	13	22.4	31.4	4.9	18.8		10.6	42
$\phi 8$	KQGT08-00	15	25.5	36.3	6.1	20.9	4.2	25.6	57
$\phi 10$	KQGT10-00	18	28.6	40.6	7.1	23		40	95
$\phi 12$	KQGT12-00	20.8	31.4	44.5	8.1	24.8		57.4	129




Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Union "Y": KQGU



Applicable tubing O.D. (mm)	Model	Note 1) ϕD	W	L ₁	L ₂	P	M ₁	M ₂	Effective area ^{Note 2)} (mm ²)	Mass (g)
$\phi 4$	KQGU04-00	10.6	21.2	41	16.8	10.6	18	17	4.2	35
$\phi 6$	KQGU06-00	13	26	42.9	17	13	18.8	17.8	10.6	54
$\phi 8$	KQGU08-00	15	30	47.7	18.7	15	20.9	19.9	25.6	75
$\phi 10$	KQGU10-00	18	36	52.8	20.5	18	23	22	40	114
$\phi 12$	KQGU12-00	20.8	41.6	57.8	21.9	21	24.8	23.8	57.4	175




Note 1) ϕD is maximum diameter.
Note 2) Figures shown when using FEP tubing

Bulkhead Union: KQGE



Applicable tubing O.D. (mm)	Model	T (M)	H (Width across flats)	L	Mounting hole	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
$\phi 4$	KQGE04-00	M12X1	14	37	13	18	5.6	21
$\phi 6$	KQGE06-00	M14X1	17	38	15	18.5	10.4	29
$\phi 8$	KQGE08-00	M16X1	19	42.8	17	20.9	26.1	40
$\phi 10$	KQGE10-00	M20X1	24	47	21	23	41.5	71
$\phi 12$	KQGE12-00	M22X1	27	50.6	23	24.8	58.3	95



Note) Figures shown when using FEP tubing

Stainless Steel 316 One-touch Fittings

Applicable tubing: Inch size/Connection thread: UNF, NPT

Series KQG



Applicable Tubing

Tubing material	FEP, PFA, Nylon, Soft nylon ^{Note 1)} , Polyurethane ^{Note 2)} , Polyolefin
Tubing O.D.	ø5/32", ø1/4", ø5/16", ø3/8", ø1/2"

Specifications

Fluid	Air, Water, Steam ^{Note 3)} ^{Note 4)}
Operating pressure range ^{Note 5)}	-100 kPa to 1 MPa
Proof pressure	3.0 MPa
Ambient and fluid temperature ^{Note 6)}	-5 to 150°C (No freezing)
Lubricant	Grease-free specification
Seal on the threads	With sealant

Note 1) For soft nylon tubing, water cannot be used.

Note 2) The pulling strength of polyurethane tube is as follows. The pulling load of the tube used for verifying the mounting of the tube within the fitting should be the values as shown or less in the table below. As reference, the thrust force occurring between the tube and the fitting at 0.8 MPa is shown on the table below.

Pulling Strength

Model	TU0425	TIUB07	TU0805	TIUB11	TIUB13
Without inner sleeve	50 N	80 N	110 N	140 N	140 N
With inner sleeve	160 N	180 N	250 N	450 N	500 N

Reference: Thrust Force Occurring at 0.8 MPa

Model	TU0425	TIUB07	TU0805	TIUB11	TIUB13
Load	10 N	25 N	40 N	65 N	90 N

Note 3) Please consult with SMC regarding applicable tube separately.

Note 4) Special FKM that is resistant even when steam is used.

Note 5) Please avoid using in a vacuum holding application such as a leak tester, since there is leakage.

Note 6) It is recommended that you use the inner sleeve in the following conditions:

- When using in an environment where the fluid temperature changes drastically.
- When using at a high temperature.

Temperature Conditions


Operating tube	Temperature
FEP tubing/TH series	80°C or more
PFA tubing/TL series	120°C or more

Spare Parts

Description	Model	Material
Gasket	M-5G3	Stainless steel 316, Special FKM
Bulkhead nut	KQG03-P01	Stainless steel 316
	KQG07-P01	
	KQG09-P01	
	KQG11-P01	
	KQG13-P01	

Tubing O.D.	Tubing model (Material)			Applicable inner sleeve	
	TU/TIU (Polyurethane)	TH/THI (FEP)	TL/TIL (PFA)	Model	Length (mm)
ø5/32"	—	TH0402	—	TJG-0402	18
	TU0425	TH0425	—	TJG-0425	18
	—	—	TL0403	TJG-0403	18
ø1/4"	—	TIHB07	TIL07	TJG-0604	19
	TIUB07	—	—	TJG-0742	19
	—	TIHA07	—	TJG-0746	19
ø5/16"	TU0805	—	—	TJG-0805	20.5
	—	TH0806	TL0806	TJG-0806	20.5
ø3/8"	TIUB11	TIHB11	TIL11	TJG-1065	23
	—	TIHA11	—	TJG-1107	23
ø1/2"	TIUB13	—	—	TJG-1384	24
	—	TIH13	TIL13	TJG-1395	24

Construction

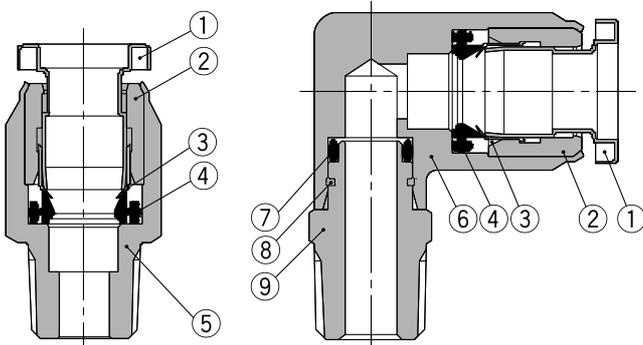

No.	Description	Material
1	Release bushing	Stainless steel 316
2	Guide	Stainless steel 316
3	Chuck	Stainless steel 316
4	Seal	Special FKM (Fluoro coated)
5	Male connector body	Stainless steel 316
6	Male elbow body	Stainless steel 316
7	O-ring	Special FKM (Fluoro coated)
8	Stopper ring	Stainless steel 316
9	Stud	Stainless steel 316

Series KQG

Dimensions


Male Connector: KQGH




Applicable tubing O.D. (inch)	Connection thread NPT	Model	H (Width across flats)	Note 1) ϕD	L	A*	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	10-32UNF	KQGH03-32	10	10	22.3	19.3	18	4	7.4
	NPT1/8	KQGH03-N01S	12		24	19.9		5.6	10
1/4	10-32UNF	KQGH07-32	13	12	24.1	21.1	18.8	4	12
	NPT1/8	KQGH07-N01S			24.3	20.2			12
	NPT1/4	KQGH07-N02S			25.8	20		18	
5/16	NPT1/8	KQGH09-N01S	14	14	30.5	26.4	20.9	26.1	18
	NPT1/4	KQGH09-N02S			28.5	22.7			18
	NPT3/8	KQGH09-N03S			24	17.9		24	
3/8	NPT1/4	KQGH11-N02S	19	17	35.5	29.7	23	41.5	31
	NPT3/8	KQGH11-N03S			31	24.9			31
	NPT3/8	KQGH13-N03S			22	19		32.8	26.7
NPT1/2	KQGH13-N04S	24.7	51						

* Reference dimensions after installation of NPT thread Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing

(In case of M5)



(In case of R)




Hexagon Socket Head Male Connector: KQGS




Applicable tubing O.D. (inch)	Connection thread NPT	Model	H (Width across flats)	Note 1) ϕD	L	A*	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	10-32UNF	KQGS03-32	2.5	10	25	22	18	4	8.6
	NPT1/8	KQGS03-N01S	2.78	12		20.9		4.1	11
1/4	10-32UNF	KQGS07-32	4.76	13	25.8	22.8	18.8	4	13
	NPT1/8	KQGS07-N01S				21.7		9.9	13
	NPT1/4	KQGS07-N02S				20		10	20
5/16	NPT1/8	KQGS09-N01S	6.35	14	30.5	26.4	20.9	17.2	17
	NPT1/4	KQGS09-N02S			28.5	22.7		23.3	18
	NPT3/8	KQGS09-N03S			19	30.1			24
3/8	NPT1/4	KQGS11-N02S	9.53	17	35.5	29.7	23	39	28
	NPT3/8	KQGS11-N03S			19	31			24.9
	NPT3/8	KQGS13-N03S			22	19		32.8	26.7
NPT1/2	KQGS13-N04S	24.7	54						

* Reference dimensions after installation of NPT thread Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing

(In case of M5)



(In case of R)




Straight Union: KQGH



Applicable tubing O.D. (inch)	Model	Note 1) ϕD	L	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	KQGH03-00	11	37	18	5.6	16
1/4	KQGH07-00	14	38.6	18.8	13.1	22
5/16	KQGH09-00	15	42.8	20.9	26.1	31
3/8	KQGH11-00	19	47	23	41.5	54
1/2	KQGH13-00	22	50.6	24.8	58.3	66

Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing



Stainless Steel 316 One-touch Fittings *Series KQG*

Applicable tubing: Inch size/Connection thread: UNF, NPT

Dimensions


Male Elbow: KQGL




Applicable tubing O.D. (inch)	Connection thread NPT	Model	H (Width across flats)	Note 1) ϕD	L ₁	L ₂	A*	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	10-32UNF	KQGL03-32	10	10.6	20.5	16	18.3	18	3.5	18
	NPT1/8	KQGL03-N01S	12			19.5	20.7		4.2	21
1/4	10-32UNF	KQGL07-32	10	13	22.1	17	20.5	18.8	3.5	25
	NPT1/8	KQGL07-N01S	12			20.5	22.9		9	27
	NPT1/4	KQGL07-N02S	14			24.5	25.2		9	35
5/16	NPT1/8	KQGL09-N01S	12	15	24.9	21.9	25.3	20.9	21.6	37
	NPT1/4	KQGL09-N02S	14			25.9	27.6			45
	NPT3/8	KQGL09-N03S	14			27.9	29.3			58
3/8	NPT1/4	KQGL11-N02S	19	18	27.8	27.7	30.9	23	35.2	71
	NPT3/8	KQGL11-N03S				29.7	32.6			75
1/2	NPT3/8	KQGL13-N03S	22	20.8	31.3	31	35.3	23.4	50.2	96
	NPT1/2	KQGL13-N04S				35	37.3			121

* Reference dimensions after installation of NPT thread
 Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing

(In case of M5)



(In case of R)




Union Elbow: KQGL



Applicable tubing O.D. (inch)	Model	Note 1) ϕD	L	A	Q ₁	Q ₂	M	ϕN	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	KQGL03-00	10.6	20.6	27.3	2.3	3.7	18	3.2	4.2	21
1/4	KQGL07-00	13	22.4	28.9	3.5	3.5	18.8		9	32
5/16	KQGL09-00	15	25.5	35.1	5	5.6	20.9	4.2	21.6	49
3/8	KQGL11-00	18	28.6	38.2	6.4	6.4	23.4		35.2	76
1/2	KQGL13-00	20.8	31.4	41.8	6.4	6.4	23.4	50.2	108	

Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing




Male Branch Tee: KQGT




Applicable tubing O.D. (inch)	Connection thread NPT	Model	H (Width across flats)	Note 1) ϕD	L ₁	L ₂	A*	M	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	10-32UNF	KQGT03-32	10	10.6	20.5	18	23.1	18	4.5	26
	NPT1/8	KQGT03-N01S	12			21.5	25.5		6	28
1/4	10-32UNF	KQGT07-32	10	13	22.1	19	25	18.8	4.5	39
	NPT1/8	KQGT07-N01S	12			22.5	27.4		11	42
	NPT1/4	KQGT07-N02S	14			26.5	29.7		11	50
5/16	NPT1/8	KQGT09-N01S	12	15	24.9	23.9	30.6	20.9	26.3	61
	NPT1/4	KQGT09-N02S	14			27.9	32.9			70
	NPT3/8	KQGT09-N03S	14			29.9	34.6			85
3/8	NPT1/4	KQGT11-N02S	19	18	27.8	29.7	35.9	23	40.8	99
	NPT3/8	KQGT11-N03S				31.7	37.6			103
1/2	NPT3/8	KQGT13-N03S	22	20.8	31.3	32.7	39.7	23.4	57.2	135
	NPT1/2	KQGT13-N04S				36.7	41.7			159

* Reference dimensions after installation of NPT thread
 Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing

(In case of M5)

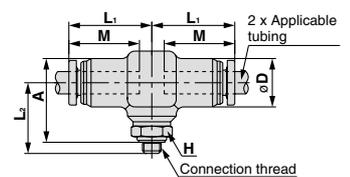

(In case of R)

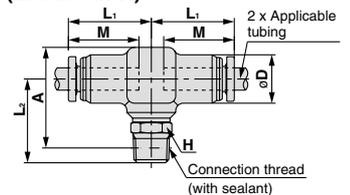

Series KQG


Dimensions

Union Tee: KQGT



Applicable tubing O.D. (inch)	Model	Note 1) ϕD	L	A	Q	M	ϕN	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	KQGT03-00	10.6	20.6	28.7	4.1	18	3.2	6.4	28
1/4	KQGT07-00	13	22.4	31.4	4.9	18.8		10.6	42
5/16	KQGT09-00	15	25.5	36.3	6.1	20.9	4.2	25.6	57
3/8	KQGT11-00	18	28.6	40.6	7.1	23		40	95
1/2	KQGT13-00	20.8	31.4	44.5	8.1	23.4		57.4	129

Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing




Union "Y": KQGU



Applicable tubing O.D. (inch)	Model	Note 1) ϕD	W	L ₁	L ₂	P	M ₁	M ₂	ϕN	Effective area ^{Note 2)} (mm ²)	Mass (g)
5/32	KQGU03-00	10.6	21.2	41	16.8	10.6	18	17	3.2	4.2	35
1/4	KQGU07-00	13	26.3	42.9	17	13	18.8	17.8		10.6	54
5/16	KQGU09-00	15	30	47.7	18.7	15	20.9	19.9	4.2	25.6	75
3/8	KQGU11-00	18	36	52.8	20.5	18	23	22		40	114
1/2	KQGU13-00	20.8	41.8	57.8	21.9	21	24.8	23.8		57.4	175

Note 1) ϕD is maximum diameter.
 Note 2) Figures shown when using FEP tubing




Bulkhead Union: KQGE



Applicable tubing O.D. (inch)	Model	T (M)	H (Width across flats)	L	Mounting hole	M	Effective area ^{Note)} (mm ²)	Mass (g)
5/32	KQGE03-00	1/2-20UNF	14	38	13.5	18	5.6	22
1/4	KQGE07-00	9/16-18UNF	17	40.6	15	18.8	10.4	31
5/16	KQGE09-00	3/4-16UNF	22	45.8	20	20.9	26.1	46
3/8	KQGE11-00	7/8-14UNF	26	50	23	23	41.5	76
1/2	KQGE13-00	1-12UNF	29	54.6	26	24.8	58.3	101

Note) Figures shown when using FEP tubing





Series KQG

Applicable Fluid List

Compatibility Checklist for Used Materials and Fluids

Chemical	Main body	Seal	Chemical	Main body	Seal
	Stainless steel 316	Special FKM		Stainless steel 316	Special FKM
Acrylonitrile	◎	×	Citric acid	◎	—
Acetamide	○	○	Cumene	×	—
Acetaldehyde	◎	×	Glycerin	◎	◎
Acetone	◎	×	Cresol	◎	△
Aniline	○	◎	Chromic acid [10%]	◎	—
Amylene	◎	—	Chlorosulfonic acid	○	×
Sulphurous acid gas (Humid gas)	◎	—	Chlorofluorocarbon (CFC) 11	—	×
Sodium bisulfite [50%]	◎	—	Chlorofluorocarbon (CFC) 113	—	×
Allyl alcohol	◎	—	Chlorofluorocarbon (CFC) 12	○	×
Benzoic acid	◎	—	Chlorofluorocarbon (CFC) 13B1	—	×
Ammonia (Compressed gas)	◎	×	Chlorofluorocarbon (CFC) 14	—	◎
Isopropyl alcohol	○	◎	Chlorofluorocarbon (CFC) 22	○	×
Isophorone	×	—	Chlorobenzene	×	○
Ethyl alcohol	◎	○	Chloroform (Trichloromethane)	○	○
Ethyl ether	○	×	Acetic acid	○	×
Ethylene	◎	—	Amyl acetate	◎	×
Ethylene glycol	×	◎	Isopropyl acetate [20%]	◎	×
Ethylene diamine	◎	—	Ethyl acetate	×	×
Ethylene dichloride	◎	—	Butyl acetate	×	×
Epichlorohydrine	◎	×	Methyl acetate	◎	×
Methyl tertiary butyl ether	—	×	Calcium hypochlorite	◎	—
Allyl chloride	×	—	Sodium hypochlorite [5%]	◎	◎
Ammonium chloride	◎	—	Potassium cyanide [50%]	◎	—
Calcium chloride	◎	—	Copper cyanide	◎	—
Iron(II) chloride [5%]	×	—	Diisobutyl ketone	◎	—
Sodium chloride	○	—	Diisobutylene	—	◎
Magnesium chloride	◎	—	Diethanolamine	◎	—
Hydrochloric acid [5%]	×	—	Diethylamine	×	×
Chlorine gas (Humid gas)	×	—	Diethylene glycol	◎	—
Carbitol	×	—	Carbon tetrachloride	◎	◎
Formic acid [50%]	○	×	Cyclohexanol	×	—
o-Xylene	△	△	Cyclohexanone	×	×
p-Xylene	△	△	Cyclohexane	×	○

Note 1) [] denotes the concentration. Aqueous solutions without condensation notes are in a saturated state.

Note 2) The above data is based on a room temperature of 20°C. Note that you may obtain different figures, depending on temperature conditions.

Note 3) The above data shows compatibility guidelines based upon component parts. Therefore, it is no guarantee of product performance. In addition, using fluids other than those specified in the catalog are not covered by the product's warranty.

How to Read the Table

- ◎: Completely unaffected or largely unaffected.
- : May be slightly affected, but, dependent upon condition, can sufficiently withstand.
- △: Advisable to use as little as possible.
- ×
- : No data is available.



Series **KQG**

Applicable Fluid List

Compatibility Checklist for Used Materials and Fluids

Chemical	Main body	Seal	Chemical	Main body	Seal
	Stainless steel 316	Special FKM		Stainless steel 316	Special FKM
Dichloroethylene	—	△	Butyl phthalate	×	—
Dichlorobenzene	—	△	Butyl alcohol	△	—
Dichloromethane (Methylene chloride)	△	△	Hydrofluoric acid [50%]	◎	—
Ethylene bromide	×	—	Furfural	×	×
Potassium bromide [30%]	◎	—	n-Propyl alcohol	◎	—
Potassium dichromate [25%]	◎	—	Propylene glycol	◎	—
Oxalic acid	◎	—	Bromochloroethane	—	×
Bromine gas	×	—	n-Hexane	○	◎
Tartaric acid	◎	—	n-Hexyl alcohol	◎	—
Nitric acid [65%]	◎	◎	n-Heptane	◎	—
Ammonium nitrate	◎	—	Benzene	×	×
Ammonium hydroxide	—	○	n-Pentane	×	—
Calcium hydroxide	◎	—	Boric acid	◎	—
Sodium hydroxide [50%]	◎	○	Gallic acid	◎	—
Barium hydroxide	◎	—	Formic aldehyde	◎	×
Solvent naphtha	◎	—	Methyl methacrylate	×	×
Carbonic acid (Humid gas and aqueous solution)	◎	—	Methyl alcohol	◎	○
Tetrachloroethylene	×	◎	Methyl isobutyl ketone	×	×
Tetrahydrofuran	—	×	Methyl ethyl ketone	×	×
Dodecylbenzene	◎	—	Ethyleneglycol monomethyl ether	×	—
Trichloroethane	△	—	Monoethanolamine	◎	—
Trichloroethylene	◎	○	Morpholine	◎	—
Trichloroacetic acid	—	—	Butyric acid	◎	—
Toluene	◎	◎	Hydrogen sulfide (Humid gas and aqueous solution)	◎	×
Naphtha	○	○	Sulphuric acid [10%]	◎	◎
Naphthenic acid	◎	—	Ammonium sulfate	◎	×
Lactic acid	◎	—	Sodium bisulfate [10%]	◎	—
Carbon disulfide	○	◎	Iron(II) sulfate	○	—
Picric acid	◎	—	Sodium sulfate	◎	—
Pyridine	×	×	Phosphoric acid [85%]	◎	—
Phenol	×	○			

Note 1) [] denotes the concentration. Aqueous solutions without condensation notes are in a saturated state.

Note 2) The above data is based on a room temperature of 20°C. Note that you may obtain different figures, depending on temperature conditions.

Note 3) The above data shows compatibility guidelines based upon component parts. Therefore, it is no guarantee of product performance. In addition, using fluids other than those specified in the catalog are not covered by the product's warranty.

How to Read the Table

- ◎: Completely unaffected or largely unaffected.
- : May be slightly affected, but, dependent upon condition, can sufficiently withstand.
- △: Advisable to use as little as possible.
- ×: Not applicable, as substantially affected.
- : No data is available.



Series KQG

Specific Product Precautions

Be sure to read before handling.

Refer to front matters 58 and 59 for Safety Instructions and pages 3 to 11 for Actuator Precautions and Auto Switch Precautions.

Selection

⚠ Caution

1. The pulling strength of polyurethane tube is as follows. The pulling load of the tube used for verifying the mounting of the tube within the fitting should be the values as shown or less in the table below. As reference, the thrust force occurring between the tube and the fitting at 0.8 MPa is shown on the table below.

Pulling Strength

Model	TU0425	TU0604 TIUB07	TU0805	TU1065 TIUB11	TU1208 TIUB13
Without inner sleeve	50 N	80 N	110 N	140 N	140 N
With inner sleeve	160 N	180 N	250 N	450 N	500 N

Reference: Thrust Force Occurring at 0.8 MPa

Model	TU0425	TU0604 TIUB07	TU0805	TU1065 TIUB11	TU1208 TIUB13
Load	10 N	25 N	40 N	65 N	90 N

2. If using water, it is recommended to use an inner sleeve. (Tube may release due to pressure pulsation or water hammer effect.)
3. If using a fluoro-resin tube in an environment where the fluid temperature changes drastically, it is recommended to use an inner sleeve. Otherwise, air leakage may occur or the tube may release from fitting due to deformation of the tube.

Mounting

⚠ Caution

1. The union elbow, union tee and union "Y" should be fixed through the mounting hole.

Otherwise, air leakage or breaking can occur due to a pulling force or moment load created by the product's weight.

Installation and Removal of Tubing

⚠ Caution

1. Installation of tubing

- 1) Grease is not used for the KQG series, therefore a greater insertion force is required when the tubing is installed. In particular, polyurethane tubing may fold when inserted due to its softness. Hold the end of the tubing, and insert it all the way in slowly and securely. Refer to dimension "M" in the dimension drawings for guidance on the insertion depth of tubing.

2. Removal of tubing

- 1) For tubing used at a high temperature or for an extended period of time, there is a possibility that it will not fit into a one-touch fitting again due to an enlarged O.D. Dispose of the tubing and replace it with a new one.